RESEARCH REPORT REPORT 739 18 OCTOBER 1956

CURRENT, TEMPERATURE, TIDE, AND ICE GROWTH MEASUREMENTS, EASTERN BERING STRAIT-CAPE PRINCE OF WALES 1953-55

G. L. BLOOM

TR 7855 .US NO.739 U. S. NAVY ELECTRONICS LABORATORY, SAN DIEGO, CALIFORNIA A BUREAU OF SHIPS LABORATORY



THE PROBLEM

Conduct survey and field studies in the Arctic Ocean which will furnish basic geophysical data significant to arctic naval warfare. This report covers an evaluation of data obtained during the period 1953 through 1955 at the Cape Prince of Wales Field Station. The operation of the station continues as part of an over-all program to obtain physical-oceanographic data pertinent to predicting ice coverage for the Bering-Chukchi-Beaufort Sea area.

RESULTS

- 1. A northerly volume transport varying from 0.8 to 3.1×10^6 cubic meters per second appears characteristic of the period August through November.
- 2. An area of maximum current velocities is indicated in the 8-to-12 mile section of the eastern Bering Strait.
- 3. Omitting initial freeze-up discontinuities, the logarithm of accumulated degree days below 29°F exhibits essentially a linear relationship with fast ice accretion at Wales, Alaska.
- 4. Average total ice growth at Wales is 46 to 48 inches, with first slush ice formed late October to early November and fast ice break-up normally completed by mid-June.

RECOMMENDATIONS

- Extend and make simultaneous oceanographic and meteorological measurements essential to a detailed analysis of the sea ice-heat budget regime.
- 2. Continue measurements of average water transport through the Bering Strait.
- 3. Conduct daily sea water temperature measurements from strategic points along the northwestern Alaskan coast.
- 4. Conduct sonar studies in respect to the effect of ice coverage and movement on ambient noise and passive detection ranges.

ADMINISTRATIVE INFORMATION

This work was initiated under SW 01402, NE 121217-1 (NEL L6-1), and was carried out by members of the Special Research Division. The report was approved for publication 18 October 1956.

The over-all program at Wales has included observations on related special projects, as follows, for other NEL codes and Naval activities, as time and manpower permitted; these projects are to be reported by the cognizant activity.

- 1. Microwave propagation to determine the variation in radar signals over fixed paths and to study effect of ice coverage as well as meteorological conditions along the transmission path.
- 2. Ultra-low-frequency propagation and variation in signal strength.
- 3. Atmospheric radioactivity background measurements.

New facilities to be installed at Wales during the summer of 1956 include complete new electrode systems using Type-216 submarine harbor defense cable together with sea units for the study of (a) bottom temperatures (at 1-, 2-, and 5-mile offshore points), (b) wave amplitude and period, (c) low frequency ambient noise spectrum, (d) water velocity at a fixed position, (e) variation in water depth and ice movement, and (f) sound velocity.

Major changes in the Wales Field Station were the erection during the summer of 1955 of two standard 20-foot-by-48 foot BuYards and Docks arctic-type quonsets to provide essential storage, laboratory, and garage space and the installation of a 15,000-gallon bulk diesel fuel storage and distribution system.

The author wishes to acknowledge the contribution of E. E. Howick and R. N. Rowray to the direct field measurement program and to the tedious task of reducing the numerous field data, and the assistance of A. C. Walker in the design and construction of thermal units and electrode elements. Many unnamed people participated in the field work and encountered much discomfort, particularly during the current survey program; to these hardy individuals the author offers his thanks.



CONTENTS

page 3		INTRODUCTION
3		INTRODUCTION
3		CURRENT MEASUREMENTS
3		Direct Observations
8		Electric Potential Measurements
0		Liectric Poletinal Accasticinents
10		SEA WATER TEMPERATURES
		CEL ICE OPONELL
15		SEA ICE GROWTH
17		TIDAL MEASUREMENTS
20		CONCLUSIONS
20		RECOMMENDATIONS
21		APPENDIX: SURFACE CURRENT AND VELOCITY PROFILE DATA
25		REFERENCES
		ILLUSTRATIONS
page	figure	
3	1	Location of current stations, 1 August 1954, in the Eastern Bering Strait
5	2	Average hourly current velocities from prafile measurements, 1 August 1954
6	3	Average hourly wind speed and tide range, 1 August 1954, Wales, Alaska
7	4 5	Crass-section along east-west measurement line from Wales, Alaska
′	9	Average northerly water transport through a 25-mile section of the

		Eastern Bering Strait, 1 August 1954
8	6	Schematic of land and sea electrode systems
0	7	Polation between water transport and notential values from sea electrade system

11 8A, BB Sample records showing signal voltages vs time
12 9A-9C Relation between accumulated degree days below 32°F and patential measured between

12 9A-9C Relation between accumulated degree days below 32°F and patential measured between land silver/silver chloride electrode and earth graund

13 10 Average monthly volume transport through a 25-mile sector of the

Eastern Bering Strait, June 1953 to November 1955

11 Average manthly sea water temperature, Bering Strait, Wales, Alaska,

13 11 Average manthly sea water temperature, Bering Strait, Wales, Alaska, October 1953 to November 1955
 14 12 Daily battom sea water temperatures, October 1953

through October 1955, Bering Strait, Wales, Alaska
14 13 Comparison of polar pack boundary, early September 19

14 13 Comparison of polar pack boundary, early September 1953, 1954, 1955
 15 14 January ice conditions, Eastern Bering Strait

16 15 Observed sea ice growth at Wales, Alaska, for 1952-1953 and 1953-1954

17 16 Comparison of ice thickness and accumulated degree days belaw 29°F for Wales, Alaska
 18 17 Offshare tide recarding station, Wales, Alaska

19 18 Tide graph and tables for Wales, Alaska, 18 July 1954 through 18 September 1954

TABLES

page	Idple	
21	1	Surface current abservations, Eastern Bering Strait, 1 August 1954
22-24	2	Summary of current velocity profile measurements, Eastern Bering Strait, 1 August 1954
17	3	Summary of monthly degree days below 29°F at Wales, Alaska, for 1952-53
		and 1953-54 ice seasons

INTRODUCTION

One of the primary projects at the Cape Prince of Wales Field Station, Wales, Alaska, is the continuing and long range study of the volume transport of water through the eastern Bering Strait, the water temperature oscillations throughout the year, the effect of meteorological phenomena and tides on the net water transport, and the over-all relation to ice distribution.

The intent is not the evolution of an extensive ice forecast program, but rather the evaluation of physical-oceanographic data in a particular system, the possible extrapolation of these data and procedures to similar systems in the arctic area, and the incorporation of pertinent information into existing ice prediction programs.

Field Station facilities, general measurement program and instrumentation have been reported.
(See list of references at end of report.) This report covers the measurement period 1953 through 1955 and summarizes 1954 current measurements conducted simultaneously from seven anchor positions located along a 20-nautical-mile line extending due west from Wales, Alaska.

These data have been used to calibrate an electromagnetic system which records potentials generated by tidal-water transport. Average monthly transport through a 25-mile section of the eastern Bering Strait has been computed and is presented herein together with monthly bottom sea water temperatures and tidal data.

A projected, additional report will study the transport on the basis of temperature-density distribution and will compare the results with the direct observations reported herein.

CURRENT MEASUREMENTS

direct observations

METHOD AND INSTRUMENTATION

On 1 August 1954, in conjunction with the 1954 Joint Canadian-U. S. Beaufort Sea Expedition, a series of simultaneous current observations were taken for approximately 14 hours. Seven stations were located along a 20-nautical-mile line extending due west from the Cape Prince of Wales Field Station across the eastern Bering Strait (fig. 1). The 8- and 12-mile positions were occupied by the icebreakers,




Figure 1. Location of current stations, 1 August 1954, in the Eastern Bering Strait.

USCGC NORTHWIND and USS BURTON ISLAND (AGB 1). Measurement platforms at the 1.5-, 3.0-, 5.0-, 12.0-, and 15.0-mile positions were two LVT-3(C)'s, two LCVP's, and one Greenland Cruiser.

Current profiles were taken at all stations using the biplane (drag) method of Pritchard and Burt.² Metal biplanes with the following characteristics were used in lieu of weighted wooden drags:

	Aluminum	
Drag material	(Alclad 24ST)	Iron
Cross plane dimensions		
(inches)		
Thickness	5/32	1/4
Width	18	18
Height	12	12
Ave. wt. in air (lb)	7.34	30.88
Ave. wt. in sea	4.86	27.04
water (lb)		
Velocity range	0.23	0.53
(3° to 45° wire	to	to
angle, knots)	0.98	2.33

Wire angles were determined with inclinometers using standard oceanographic observing techniques.

Surface currents were determined from drifting aluminum biplanes submerged 3 feet beneath the sea surface. To minimize wind effects biplane support floats were constructed to provide only a slight positive buoyancy. Velocity was calculated from the time required for a 200-foot drift of the submerged biplane. An initial drift of 50 feet was allowed before commencing measurement to obviate inertial effects.

Surface currents and velocity profiles from 5 to 45 meters were taken at approximately half-hour intervals. Measurements at the 1.5- and 3.0-mile positions were curtailed early, since increasing seas necessitated returning to shore the amphibious vehicles located at these positions.

In addition to surface current observations and velocity profiles using the biplane method, for comparative data a series of velocity measurements were taken at the 20-mile station using an Ekman current meter. Roll at the 20-mile position probably did not exceed 2 feet in amplitude during the measurement period. However, even this slight roll will give erroneous direction and velocity with the Ekman current meter and must be kept in mind when interpreting these data.

Prior to 0800 the LCVP at the 5-mile position dragged anchor badly and, throughout the measurement period, the boat was subjected to a very severe cross chop and roll. This effect probably accounts for the low values prior to 0800. These data have, consequently, been omitted in later transport calculations.

DISCUSSION OF DATA

Complete surface current observations and velocity profile data from the seven stations are presented in the Appendix, tables 1 and 2, respectively.

Average current velocities of 0.3 to 0.5 knot (zero at the two most seaward stations) were recorded from 0200 to 0500. Velocities increased rapidly after 0500 at all stations reaching maximum average values of 1.7, 1.8, 1.8, 2.0, 1.5, and 1.2 knots, respectively, at the 3-to-20 mile positions. The data indicate that an area of maximum velocity gradient probably exists in the 5-to-12 mile sector.

All currents were predominantly north-setting, except for low velocity values recorded prior to 0500 at the 15- and 20-mile stations. The variation in direction was most pronounced at the 15-mile station, particularly in the surface current observations. From 0200 to 0600 the water appeared to be moving slowly in a clockwise eddy from south to north. Decrease in velocity with depth determined by submerged biplanes and checked at the 20-mile station by an Ekman current meter was slight throughout the observation period.

Average current velocities were calculated by computing the arithmetic mean for each set of profiles taken at the anchor stations. These values are presented graphically in figure 2.

Average hourly wind speeds and tidal data, both measured at the Cape Prince of Wales Station, Wales, Alaska, during the current survey period, are shown in figure 3. Comparison of figures 2 and 3 suggests a correlation between current speed, tide, and wind. Since current observations did not cover a complete tidal cycle, positive conclusions cannot be drawn. Data from the electrode system (presented later in this report) show a corresponding early morning increase in water transport during flood tide, but show very little decrease in transport from 1245 to 1700 (during ebb tide). The tide range off Wales is small, generally of the order of 8 inches. The change from low tide at 0445 to high tide at 1245, on 1 August 1954, measured 11.7 inches

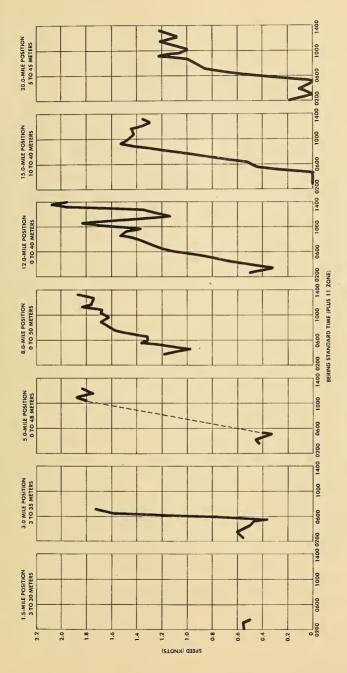


Figure 2. Average hourly current velocities from profile measurements, 1 August 1954.

compared to a 2.4-inch change from 1245 to 1700. It is possible that the wind effect (average wind speed, 21 mph) is sufficient to mask the extremely low tidal range during this period.

Dall³ concluded that the northly current through the Strait is probably chiefly dependent on the tide for its force and direction, while studies in 1949 by Lesser and Pickard⁴ indicate that the current through the Bering Strait is not primarily tidal in character, nor does it have a major tidal component. It is apparent that the relation of tides to the water transport through the Bering Strait remains a contradictory subject, and the problem can be resolved only by a well coordinated tide and current measurement program which covers sufficient tidal cycles to permit a valid analysis.

Assuming velocity measurements at the 20-mile position are valid to 25 nautical miles, the average volume transport through a 25-mile vertical section of the Strait extending due west from the Field Station (along the measurement line of fig. 1) has

been calculated for the 1 August 1954 observation period.

For transport calculation purposes the 25-mile section was divided into bands of average current velocity as indicated in figure 4 (crosses denote anchor station positions and depths).

The average northerly water transport through a 25-mile section of the eastern Bering Strait is $10^6 \times \text{cubic}$ meters per second for the period from 0200 to 1400 is shown in figure 5. The average maximum transport value of 1.84×10^6 cubic meters per second is significantly higher than previous average values for the entire strait of 0.88 computed by Sverdrup⁵ and 1.28 determined as a summer value based on oceanographic observations taken in 1949.⁴

The current data clearly indicate the erroneous interpretation which can be drawn from a series of current measurements taken at varying time intervals and positions in the Bering Strait, and are indicative of short term fluctuations in current and transport which may be encountered.

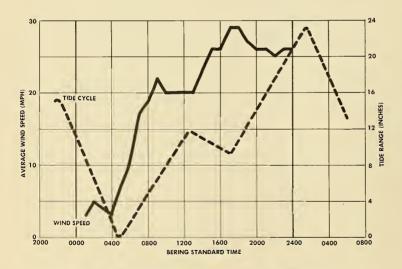


Figure 3. Average hourly wind speed and tide range, 1 August 1954, Wales, Alaska.




Figure 4. Crass-section along east-west measurement line from Wales, Alaska.

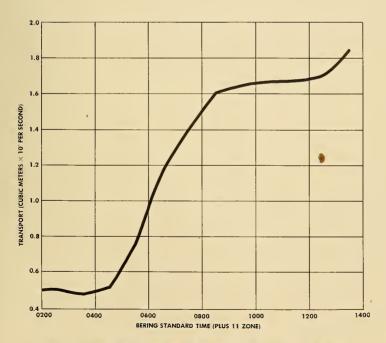


Figure 5. Average northerly water transport through a 25-mile section of the Eastern Bering Strait, 1 August 1954.

electric potential measurements

The possibility of measuring tidally generated potentials in bays and through ocean channels has been considered and discussed by numerous investigators, 6-9 The method has been employed in the study of mass water transport between Key West and Havana, and the average mass transport of the Florida Current for the period of August 1952 to August 1954 has been reported by Wertheim. 10

Electric potentials were initially measured in the Bering Strait in 1949.¹¹ Continuation of these studies in 1951-1952 yielded only sketchy results, primarily because of installation problems associated with maintaining electrode-cable systems in an area subject to ocean freezing and ice movement.

Obviously, the most desirable procedure for measuring potentials and for studying their relation to water transport involves installation of electrodes on opposite banks of a channel. Since this technique cannot be followed in the Bering Strait, electrodes were bottom-laid, perpendicular to flow, near the eastern side of the Strait and connected to shore recording equipment by appropriate signal links (fig. 6). (A complete description of electrode systems

and electrode construction has been given in reference 1.) Edge effects of potential gradients extending inland have been recorded using land electrode systems laid perpendicular and parallel to flow.

Young, Gerrard, and Jevons⁷ considered the effect of potential gradients on a set of moored electrodes near one shore of a broad channel and demonstrated that the potential gradient \mathbf{e}_1 where \mathbf{v}_1 is the observed velocity in the experimental area exhibits the following relation (sea bottom-conducting):

$$e_1 = -Vv_1 s + Cs_{\rho}$$
 (electromagnetic units)

where

V = earth's vertical field (gauss)

 $v_1 = water velocity (cm/sec)$


s = length of water filament (cm)

C = current density (abamperes/cm²)

 $\rho =$ specific resistance of the water (ohms/cm)

Theoretically, C may have a value as great as Vv_0/ρ where v_0 equals the mean velocity across the entire channel and the conductivity of the earth bed is negligible compared to the water. In such an idealized case

$$e_1 = -Vv_1 s + Vv_0 s$$

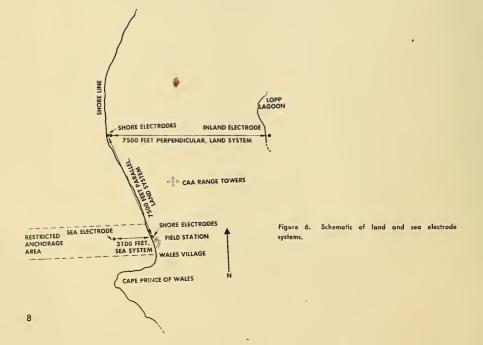

The effect would be to reverse the sign of e₁ (measured potential) and give the impression that experimental observations disagree even quantitatively with theory.

Potentials measured by the electrodes moored near shore in the eastern Bering Strait generally indicate polarities opposite to that expected from the known direction of water flowing through the system and would lend experimental support to the conclusion that water motion seaward of a moored electrode system can have an overriding effect on the potentials recorded.

Because of the many indeterminate effects contributing to the potentials measured at the Field Station, the electrode system was calibrated from current survey data and an emperical relationship used to convert observed potentials to volume transport values.

The relation between hourly potentials from the sea electrode system and volume transport for a 25-mile section of the eastern Bering Strait (calculated from the 1 August 1954 current measurements) is indicated in figure 7. The displacement from zero may be attributed to several possibilities: (1) electrode polarization, (2) concentration effects, (3) earth currents, and (4) water motion in the western Bering Strait. Further current studies and comparison with simultaneous potential measurements are required to determine the constancy of the displacement and to provide an accurate estimate of cause.

Using the relation in figure 7, average monthly transports through a 25-mile sector of the eastern Bering Strait were computed from potentials recorded on the sea electrode system. The potentials were computed by determining a mean value from the

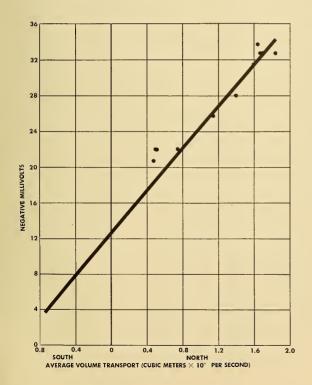


Figure 7. Relation between water transpart and patential values fram sea electrode system.

daily (0000-2400) voltage records (figs. 8A, 8B) and by calculating an arithmetic monthly average from the daily values.

A similar evaluation of potentials measured on land electrode systems indicates that such systems are generally unworkable, at least for this location, since tidally generated or "transport" patentials are abscured by earth currents and large random fluctuations in signals during the summer months and by variable losses in "pick-up" sensitivity due to the ground freezing during the winter months. The decrease in electrical conductivity between land electrades is illustrated indirectly by the changes in valtages developed between land silver/silver chloride electrodes and earth grounds as the atmospheric heat input fluctuates (figs. 9A, 9B, and 9C). The irregular signal fluctuations are common to both sea and land electrode systems, although more pronounced in the land system. The electric potential measurements reported by Wertheim¹⁰ exhibit comparable fluctuations and have been related to variations in the magnitude and direction of the horizontal component of the geomagnetic field.

Inspection of the average monthly mass water transport for June 1953 through November 1955 (fig. 10) indicates considerable fluctuation throughout the year both in volume and in direction. A northerly transport for August through November ranging from a minimum of 0.8 to a maximum of 3.1 \times 10 6 cubic meters per second is characteristic of all three years.

The large southerly outflow of water from the Arctic Ocean system in May and June of 1954 (3.8 \times $10^{\rm 6}$ cubic meters per second) is somewhat surprising and perhaps contrary to many former opinions, although continuous measurements which provide evidence on the volume and direction of transport through the Strait are extremely meager. It is unfortunate that comparative data for the same periad in 1953 and 1955 are unavailable.

The reader is cautioned as to the accuracy of the mass transport data. Until further potential measurements and current calibrations have been conducted, the data presented in figure 10 must be considered tentative. It is abvious that a shift in the empirical calibration curve (fig. 7) could cause appreciable changes in transport values calculated from the average monthly potentials.

SEA WATER TEMPERATURES

Bottom sea water temperatures in the eastern Bering Strait have been measured, 1200 feet offshore in 10 feet of water, from October 1953 to November 1955. Average monthly and daily temperatures for this period are presented graphically in figures 11 and 12.

More significant data in relation ta water transport are obtained when the thermal units are laid in deeper water at a distance 4 to 6 miles offshore, where a zone of boundary or transitional flow appears to exist. Data were obtained in this area in 1951¹ and indicated considerable correlation with water movement and wind shifts. The reported measurements, taken near shore in shallow and relatively protected waters, obviously reflect atmospheric radiation and meteorological parameters to a far greater degree than average oceanographic changes and must be considered in the interpretation.

Ice reconnaissance data summarized in terms of the polar pack ice boundary and reported by the U. S. Navy Hydrographic Office¹² illustrate the relative navigability or severity of ice conditions in the Chukchi/Beaufort Seas for the years 1953, 1954, and 1955 and are reproduced in figure 13. From figure 11 it is noted that the average monthly temperatures for August and September 1954 were 2.7°F and 4.0°F higher than for the same months in 1955. This leads to speculation on the contribution of water transport, if any, to the large recession of ice off the northwestern Alaskan coast and the extreme open conditions in the Chukchi Sea during 1954.

A contradictory feature arises, if average monthly volume transport values are considered together with the average monthly temperatures. Since the August-September 1955 transport values are indicated to be approximately twice the volume for the same months in 1954, the total theoretical amount of available "oceanic" heat above 29°F for these two months is only about 50 per cent and 70 per cent as great as for August and September 1955. Thus, it might be reasoned that the water contribution ta ice disintegration is slight or negligible.

From the preceding data it is apparent that a complete heat budget study which considers all pertinent oceanographic and meteorological parameters in relation to ice growth, dissipation, and movement

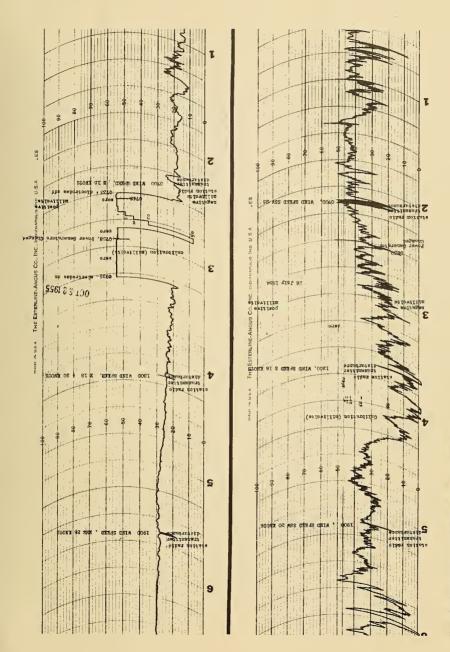


Figure 8. Sample record showing signal voltage versus time. A. Typical voltages, sea electrodes. B. Typical voltages, land electrodes, relatively undisturbed period.

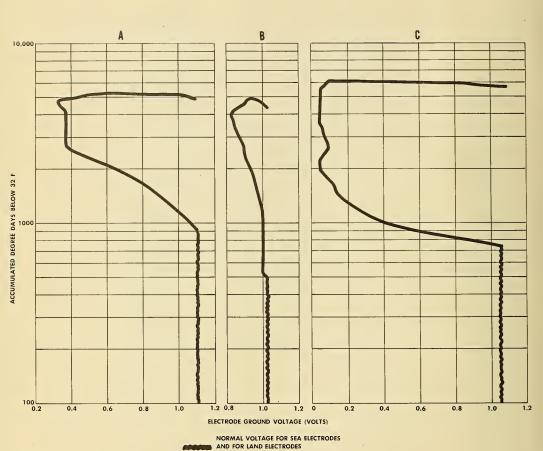


Figure 9. Relation between accumulated degree days below 32°F and potential measured between a land silver/silver chloride electrode and earth ground.

DURING SUMMER PERIOD

- A. Period 17 October 1952 to 1 August 1953.
- B. Period 22 October 1953 to 1 August 1954.
- C. Period 7 October 1954 to 1 August 1955.

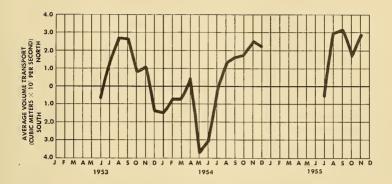


Figure 10. Average monthly valume tronspart through a 25-mile sector of the Eastern Bering Strait, June 1953 to November 1955.

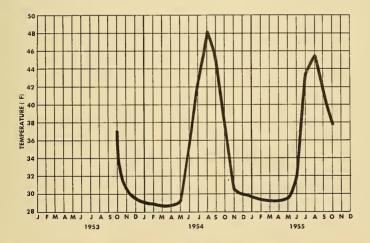


Figure 11. Average monthly sea water temperature, Bering Stroit, Wales, Alaska, October 1953 to November 1955.

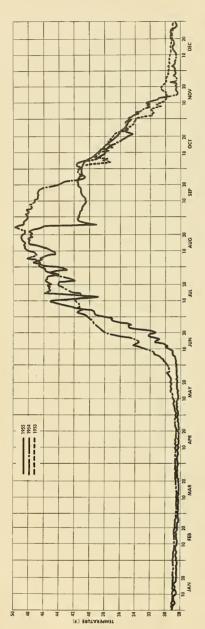


Figure 12. Daily bottom sea water temperatures, October 1953 through October 1955, Bering Strait, Wales, Alaska.

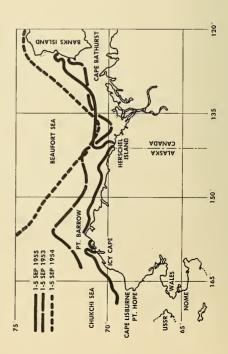


Figure 13. Comparison of polar pack boundary, early September 1953, 1954, 1955.

must be made before consistent "behavior" or prediction formulas can be developed. In order to unravel and to assign quantitative values to each factor or even realistically to group effects contributing to the ice regime, it may well be necessary to extend measurement stations to several strategic points within the system. A minimum requirement for evaluation of the Bering Strait/Chukchi Sea system appears to be coordinated oceanographic measurements from Wales and from a northern station located at Point Hope or Cape Lisburne.

SEA ICE GROWTH

The first slush ice formation off Wales, Alaska, appears from mid-October to mid-November with variable states of slush-pancake-young ice and open water combinations existing until the first or second week of December when ice accretion becomes more

uniform, with growth of the solid state continuing until the later part of April to early May. The heat budget then reverses with the break-up progressing rapidly throughout late May and the first two weeks of June. By July the area is free of fast and drift ice except for a few scattered growlers.

The land-fast ice sheet is variable in width from 1 to ½ mile, with the sea ice beyond the fast ice in continual motion throughout the winter season. Typical ice conditions during January in the eastern Bering Strait are illustrated in figure 14.

The rate of growth of sea ice was measured in the fast ice at a point ½ mile offshore during the 1952-1953 and the 1953-1954 ice seasons. Thickness was determined by drilling 1½-inch holes with an auger-type corer and measuring the sheet with a calibrated rod constructed with a spring-loaded arm designed to project against the underside of the ice upon release from the boundaries of the drill hole.



Figure 14. Area between Wales and Diamede Islands illustrating January ice conditions. Fost ice is the dark partion in the lower part of the photograph. All light ice moving north.

The increase in ice thickness with time is shown in figure 15.

Discontinuities exist at the beginning of each season, caused in 1952 by the destruction of the fast ice sheet and in 1953 by the influx of drift ice which remained and developed as the permanent fast ice sheet. Prior to the destruction of the ice on 5 January 1953 by high winds and above freezing temperatures, an estimated thickness of 14 to 18 inches had been attained.

The break-up of the fast ice on 29 May may be indicative of the mild ice conditions experienced off the northern and northwestern Alaskan coast during the summer of 1954 and is approximately two weeks earlier than the average observed time for the 5-year period from 1951 to 1955.

A comparison of ice thickness and accumulated degree days below 29°F is given in figure 16. For each season, degree days are calculated starting with the date the first slush ice was observed. The average daily temperature is computed as the mean of the maximum and minimum air temperature recorded at Wales, Based on the Field Station weather observations, the meteorological factors of cloud cover, wind speed, and humidity and the insulating effect of snow cover on rate of ice growth are generally comparable for the two ice seasons considered here. The snow cover on the ice did not exceed 4 inches throughout the measurement periods. Minor irregularities in the comparison of degree days and ice thickness are expected, due to the limited temperature data and to the method of calculating average daily temperatures.

The discontinuities during the initial formation of the fast ice should be kept in mind, since these have a definite bearing on the slope of the ice farmation curve and no doubt account for much of the divergence during early stages of growth. Comparable rates of growth are indicative for both seasons after an ice thickness of 31.5 inches was reached.

The complexity of the variables affecting the ice growth rate is recognized and field studies are now in progress to obtain more complete meteorological, oceanographic, and temperature profile (air-ice-water) data. These observations will be analyzed in greater detail than the preceding data and the observed ice growth compared with theoretical values computed by various methods discussed and summarized by Calaway.¹³




Figure 15. Observed sea ice growth at Wales, Alaska, for 1952-1953 and 1953-1954.


The number of degree days below 29°F in each month, October through May, for the approximate 1952-53 and 1953-54 ice seasons is summarized in table 3.

TABLE 3. Summary of monthly degree days below 29°F at Wales, Alaska, for 1952-1953 and 1953-1954 ice seasons

Month	Year	Degree Days Below 29°F	Year	Degree Days 8elow 29°F
October	1952	77*	1953	4
November	1952	198	1953	276
December	1952	649	1953	964
January	1953	996	1954	918
February	1953	1079	1954	1134
March	1953	1104	1954	710
April	1953	488	1954	322
May	1953	52	1954	148*
Total		4489		4180

^{*} Minus value indicates degree days above 29°F.

Total degree days for the 1953-54 period are approximately 7 per cent less than for the previous year. The relatively rapid atmospheric warming and the mild air temperatures in the spring of 1954 are reflected in the lower degree day totals for March and April and in the number of degree days above 29°F for May. The significance of these data and the predictable effect, if any, in relation to break-up require further study.



TIDAL MEASUREMENTS

A secondary type tide station was erected in the surf area off Wales, Alaska, during the summer of 1954 and a series of tide observations taken for a period of 9 weeks from 19 July to 18 September. Observations were conducted primarily to assist in the evaluation of a hydraulic system for measuring fluid transfer from off-shore points and to provide simultaneous tide data in conjunction with electromagnetic transport measurements.

Tidal cycles were measured with a Type 5-FW-1, Instrument Corporation, "portable automatic water level recorder." The instrument utilizes a conventional type 4-inch-diameter float and counterpoise weight attached to a steel tape riding over a 12-inch circumference pen drive wheel. The 5-inch-by-14.5 inch curvilinear chart is cylindrically mounted with rate of advance controlled by an 8-day spring-wound clack.

The recording insturment was mounted atop a 5-inch-diameter-by-12-foot iron float well with the counterpoise weight riding in an adjacent 2-inch-diameter tube. The wells were supported inside a 10-foot tripod, constructed from %-by-3-by-3-inch angle iron, with a 50-inch base leg spread. The tripod was located approximately 300 feet off shore and secured in position with four 100-foot-5/32-inch

Figure 16. Comparison of ice thickness and accumulated degree days below 29°F for Wales, Alaska.

guy lines running from the upper corners of the tripod to 100-pound danforth type anchors (fig. 17). In spite of moderately heavy surf action, considerable success was achieved in maintaining the equipment in continuous operation. Following one south storm it was necessary to relevel the float well and tripod; however, the procedure is generally applicable to making short term tide studies in remote and unprotected acreas where a more permanent installation is impractical or unwarranted.

Tidal measurements are summarized in figure 18. The height of water given in inches is based on actual staff readings with zero representing the ocean floor at the tide stand. A permanent inshore bench mark has been established which will permit correlating future observations. All times listed are Bering Standard. The graphic presentation indicates the character of the tidal cycles measured.

A stage height ratio of 5 inches of chart equal to 60 inches of water and a time scale of approximately 1 millimeter equal to 30 minutes were the instrument recording chart coordinates. The estimated

reading errors for the time of high and low tides is of the order of 10 minutes and for tide heights is plus or minus 0.2 inch.

A complete analysis correcting for winds, barometric conditions, and other factors effecting tide changes has not been made; however, the following predominate features are noted from inspection of the tidal data. The tides off Wales exhibit considerable diurnal inequality while the average period indicates that the partial tide force is "principal lunar" with the occurrence of high and low waters normally characterized by a semidiurnal variation.

Range between successive maxima and minima are small, averaging 8 inches during the 9-week observation period and ranging from a minimum value of 0.2 inch to a maximum of 18 inches. Strong local winds and storms over the Bering Sea/Bering Strait tend to deform the tidal curve, depressing or enlarging the oscillations and the daily tidal periods. A maximum variation in sea level from low low water to high high water of 51 inches was observed during the July-September recording period.



Figure 17. Offshare tide recording station, Wales, Alaska.

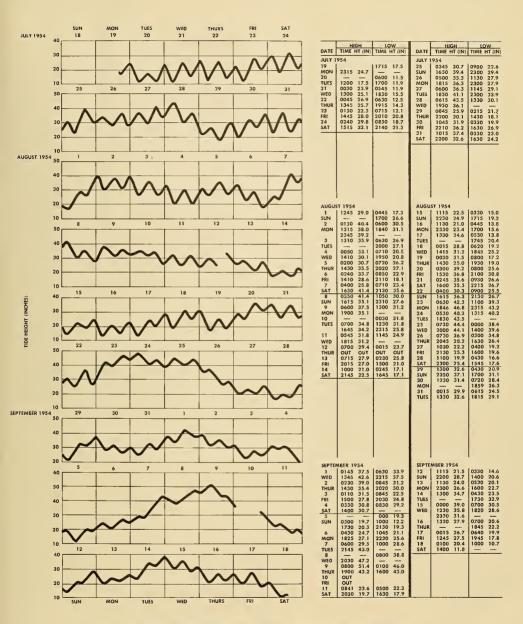


Figure 18. Tide graph and tables far Wales, Alaska, 18 July 1954 through 18 September 1954.

CONCLUSIONS

- Average mass water transport through the eastern Bering Strait exhibits considerable fluctuation throughout the year both in volume and direction.
- 2. A northerly valume transport varying from 0.8 to 3.1×10^6 cubic meters per second appears characteristic of the period August through November.
- An area of maximum current velocities is indicated in the 8-to-12-mile section of the eastern Bering Strait.
- 4. Potentials measured with short sea electrode systems can be correlated with mass water transport, while land electrode systems appear generally unworkable for the Cape Prince of Wales area.
- 5. Bottom sea water temperatures in the eastern Bering Strait attain maximum average values of 45°F to 49°F by late August and reflect north-south shifts in wind direction and water transport.
- Omitting initial freeze-up discontinuities, the logarithm of accumulated degree days below 29°F exhibits essentially a linear relationship with fast ice accretion at Wales, Alaska.
- Average total ice growth at Wales is 46 to 48 inches, with first slush ice formed late October to early November and fast ice break-up normally completed by mid June.
- 8. Tides off Wales are semi-diurnal in variation, with ranges between high and low water during the summer months averaging less than 12 inches.

RECOMMENDATIONS

- Extend and make simultaneous oceanographic and meteorological measurements essential to a detailed analysis of the sea-ice-heat-budget regime.
- Continue measurement of average water transport through the Bering Strait by the electromagnetic method and conduct independent water velocity measurements for correlation with transport data.
- 3. Conduct daily sea-water temperature measurements from strategic points along the northwestern Alaskan coast as an aid to the study of temperature/transport discrepancies.
- Conduct sonar studies in respect to the effect of ice coverage and movement on ambient noise and passive detection ranges.
- 5. Study and relate tide and wind contribution to water transport through the Bering Strait.
- Obtain data on the variation of the horizontal component of the earth's magnetic field and the contribution to the fluctuations present in the water-transport-generated signal potentials.
- 7. Conduct laboratory experiments to simulate the effect of varying current speeds and direction on electrical potentials generated by simultaneous irregular flow conditions across the Bering Strait.

APPENDIX: SURFACE CURRENT AND VELOCITY PROFILE DATA

TABLE 1. Surface current abservations, eastern Bering Strait, 1 August 1954.

				1			
Position			rent	Position			rrent
(n. m. due west line)	Time (85T*)	Dir. (ta)	Speed (kt)	(n. m. due west line)	Time (8ST*)	Dir. (to)	Speed (kt)
west line)	(031-)	(10)	(RT)	west line)		(10)	_
	LVT-3(C)	No. 1			0730	Z	1.43
1.5	0230	l W	0.49		0801 0830	2 2	1.48
	0310	WNW	0.20		0901	N	1.32
	0345	NW	0.17		0930	N	1.32
	LVT-3(C)	No. 2			1002	N	1.48
3.0	0250	NW	0.53		1030	7	1.53
	0300	NW	0.52		1100	И	1.60
	0337	NNW	0.47		1130 1200	7 7	1.11 1.07
	0445	NW	0.48 0.56		1230	N	1.25
	0535 0610	N	1.13		1307	N	1.62
	0620	N	1.40		1330	И	1.83
	0705	N	1.69		1400	N	1.56
usco	C NORTH	WIND	LCVP			N ISLAN	
5.0	0300	320°	0.20			D CRUIS	
5.0	0330	320	0.20	15.0	0205 0240	180°	0.15 0.11
	0400	320	0.24		0305	195	0.11
	0430	350	0.31		0325	195	0.14
	0500	340	0.21		0405	200	0.14
	0530	340	0.19		0435	250	0.14
	0600** 0630**	340 Vor.	0.17		0500	260	0.16
	0700**	150	0.11	}	0540 0605	305 335	0.36 0.55
LCVP rec			ent aut.		0630	335	0.83
Soot rea			north of	-	0700	355	1.13
first pasiti		,			0730	355	1.13
	0950	000	2.37		0800	000	1.52
	1110	000	2.42		0830	000	1.50
					0900	000	1.52 1.48
I .	CGC NO				1005	350	1.25
8.0		341°	0.88		1040	350	1.13
	0658 0922	337 015	0.94 1.04		1115	350	0.87
	0942	015	0.93		1145	350	0.99
	0945	005	1.20		1200 1235	350 350	0.69 0.78
	1009	359	1.15		1300	350	1.03
	1030	012	1.22	110		N ISLAN	
	1042	001 015	1.18	20.0	0200		1 0.0
	1102 1118	015	1.40	20.0	0200	_	0.0
	1133	010	1.45		0300		0.0
	1148	010	1.36		0330	110°	0.32
	1202	008	1.48		0400	115	0.26
	1219	007	1.35		0430	116	0.29
	1234	012 009	1.41		0500 0530	074	0.19
	1300	003	1.43		0600	010	0.40
					0630	010	0.44
	URTON I		LCVP		0700	009	0.43
12.0	0200	×	0.25		0730	009	0.76
	0230	2 2	0.34		0800	015 013	0.80
	0300	N	0.32		0900	010	1.01
	0400	N	0.34		0930	012	1.06
	0430	N	0.59		1000	023	0.94
	0500	И	0.88		1030	021	0.98
	0530	N	1.22		1100	026	0.95
	0600 0634	2 2	1.33		1130 1200	024	1.01 0.95
	0705	N N	1.39		1230	032	0.95

^{*} Bering Standard Time (plus 11 zone).

^{**} LCVP drogging anchor; volues highly questianable.

TABLE 2. Summary of current velocity profile measurements, eastern Bering Sea, 1 August 1955.

Depth (meters)	::															Corrent	5	
Depth meters)				-				F 3				7	2		:	-	1	3
	<u>.</u> (2)	Speed (kt)	() (<u>)</u> (<u>)</u>	speed (kt)	(t)	Speed (kt)	: ê	Speed (kt)		Speed (kt)	£ 2	(kt)	£ 2	Speed (kt)	(§	(kt)	(\$ G	(kt)
Position: 1.5 Nauticol Miles	wiles																	
, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			6	0000	5	0000												
11Me (651)		0070	3	3	5	200												
m	} Z	0.41																
9	ž	0.47	×××	0.67														
6	Ž	0.59																
9					ž	0.59												
2 2	NIA.	0 50																
7.	ž	6.0																
15	≩	0.59																
18	Ž	0.59	N× ×××	0.51								_				_		
20					×	0.51												
21	32	0 20														_		
			777	5	71.4	;												
30	2	10.0	MNA	10.0	AN	0.41												
Calculated ovg.	×	0.55	WNW	0.56	≱	0.50												
Position: 3.0 Nautical Miles	col Miles																	
, (DCT)	7500	37	5	7000		3070	20	7020	20	2020	70	7070	2	2670	2	9455		
1 1 1 1 1 1 1 1 1 1		·		/7		473		400		67	3	40		c70		22		
e	ž	0.90	<u>≩</u>	0.75	ž	0.82	≱ Z	0.75	Ž	0.82	× N N N	0.82	z	1.77	z	1.95		
9	×	0.59	ž	0.70	ž	0.29	ž	0.29	ž	0.26	×××	0.67	z	1.48	z	1.77		
	MM	2	N X	2	MN		W.1.4	77.0	WANN	76.0	MININ	000	2	1 50	- Z	771		
2			2	7		7.7	2	24.0	***	0.20	*	0.30	z :	·	z	00.		
15	≥	0.51	≩	0.51	≥ Z	0.51	<u>≩</u>	0.56	≥	0.26	≯ Z Z	1.29	z	1.48	z	1.59		
20	×	0.57	ž	0.59	ž	0.51	×	0.47	WSW	0.26	×NN N	1.19	z	1.59	z	1.66		
30	×	0 20	ž	0.54	ž	0.45	×	0.00	ž	0.37	MNN	1.19	2	1.59	z	1.77		
35	3	0 23				!												
3		2																
Colculated avg.	×	0.56	<u>≯</u>	09.0	À Z	0.50	ž	0.47	× Z	0.37	× NZ Z	1.01	z	1.58	z	1.73		
	177																	
Position: 5.0 Nautical Miles	cal Miles																	
Time (BST)→	0330	30	9	0400	ö	0200	8	0090	07	0020	10	1020	Ξ	1100	=	1135	12	1205
0	320°	0.31	320°	0.41	320°	0.20	320°*	*0.0	140°*		。 000	2.13	。000	2.13	。 000	1.77	。000	1.70
4									140	0.41								
80	320	0.43	320	0.29	320	0.34	320	0.23										
10											000	1.84	000	1.95	000	1.70	000	1.88
14			320	0.51														
15									140	0.67								
20	320	0.55	320	15.0	320	0.41	140	0.23			000	177	000	1 05	000	1.77	000	1.91
2 6	240	3	275	5	272	;	2	27:0			8 8	1 1 1	8 8	17.	8 6	7 7		1 05
3 9					000	000				!	3 6		3 8	: :	3 6	1 5	3 6	
9			320	0.53	320	0.32	140	0.76	140	0.67	000	0/.1	000	177	3	\\`.'	9	<u>-</u>
45											000	1.59	00	1.70				
46	320	0.43																
47																	000	1.66
48															000	1.77		
Calminated and	330	0.43	220	0.45	220	0.20					000	08.	000	1 88	000	174	000	1.83
coldred avg.	320	0.43	320	0.43	320	0.32	[ı	ı	i	999	9.	300	00.1	3	*/.		-

TABLE 2. (continued).

		-															1
	Current		Current	U	Current	ű	Current	ð	Current	ō	Current	ð	Current	ð	Current	J	Current
Depth (meters)	Dir. Speed (to) (kt)	ed Dir.	r. Speed (kt)	(5	Speed (kt)	(to)	Speed (kt)	Dir. (to)	Speed (kt)	Dir.	Speed (kt)	(to)	Speed (kt)	(to)	Speed (kt)	(†) (†)	Speed (kt)
Position: 8.0 Noutical Miles	ical Miles	-															
Time (BST)→	0345	_	0430	_	0515	J	0530	8	0090	8	0630	0	0730	8	0850	•	0935
0	000 1.29	9 345°	92'0 .	343°	1.25	346°	1.29	335°	141	332°	1.55	335°	1.4	010	1.59	013°	1.55
2	000	2															
02	000 1.29	9 345	1.12	343	1.21					335	1.16	335	1.44	010	1.70	013	1.44
15	000 0.98							335	1.37								
20	1.21	_	0.98	343	1.21	346	1.33			334	1.25	335	1.48	010	1.77	013	1.44
30	1.07	7 345	0.98					335	1.37	335	1.29	335	1.70	010	1.66	013	1.59
40	1.41	1 345	1.03	338	1.29	346	1.44	335	1.29	335	1.29	335	1.73	010	1.63	013	1.84
45						346	1.44			335	1.29	333	1.70	015	1.70	013	1.84
48								335	1.12								
50	70.1 000	_				342	1.29										
Calculated avg.	000	8 345	26'0	343	1.24	346	1.36	335	1.31	335	1.31	335	1.57	010	1.68	013	1.62
Position: 8.0 Nautical Miles	icol Miles																
Time (RST)	1012		1045		1115		1145	12	1235	13	1305						
0	002° 1.63	3 001°	1.77	002	1.88	012°	1.88	012°	1.81	。900	1.91						
40		_															
10	002 1.66	100 9	1.41	900	1.84	012	1.63	012	1.73	900	1.77						
15		_															
20		_		900	1.70	012	1.59	012	1.66	900	1.70						
30		_		002	2.06	012	1.81	012	1.77	900	1.88						
40	002 1.63	3 001		002	1.73	012	1.91	012	1.77	900	5.06						
45	005 1.63		1.44	900	1.77	012	1.66	012	1.70	900	1.91						
84 8		_															
Calculated avg.	002 1.68	8 001	1.67	900	1.83	012	1.75	012	1.74	900	1.87						
				_													
Position: 12.0 Nautical Miles	utical Miles	_															
Time (8ST)→	0245	_	0330		0450	_	0527	05	0555	ŏ	0630	6	0728	õ	0810	0	0830
0		z	0.44	z	1.07	z	1.48	z	1.59	z	1.48	z	1.59	z	1.77	z	1.70
10						z	1.07	z	1.33	z	1,33	z	1.33	z	1.59	z	1.70
10	N 0.53	e				z	69.0	z	0.87	z	1.12	z	1.21	ź	1.29	z	1.4
20		z	0.53	z	0.62	z	0.76	z	0.87	z	1.07	z	1.21	z	1.29	z	1.4
25	× 0.53	ю 4	Z	z	0.53	z	0.44	z	0.69	z	0.98	z	1.21	z	1.21	z	1.4.
		+	000	2	77.0	2	000	2	1 07	2	1 20	2	101	2	1 13	2	2
Calculated avg.	00:00	z	70.0	Z	6.7.9	2	Ç.0,	Z	1.0	z	77.1	Z		7	1.43	ž	20.

TABLE 2. (continued).

Current	Speed	(KT)		1400	66:		1.95		1.95	1.95		0630	1.63	1.55	1,33 1,33	1.48									0630		1.29	0.93	0.98	3	1.05							
J	Dir.	(To)			z		z		z	z		O	000	000	000	000									0		012°	012	210	1	012							
Current	Speed	(KT)		1330	2.13		2.13		1.95	2.07		0060	1.52	1.59	1.55	1.52									0060		1.07	1.25	1.33	7	1.22							
Cur	Dir.	(10)			z		z		z	z		ő	。 000	000	000	000									ŏ		010	00	010	3	010							
Current	Speed	(KT)		1300	2.13		2.13		1.59	1.95		0830	1.4	1.48	1.33	1.39									0830		0.98	0.98	1.07	3	1.00			-	uniikely.			
Curi	Dir.	(10)			z		z		z	z		80	。 000	000	000	000									80		013°	013	013	2	013				appear			
ent .	Speed	(KT)		0	yc.	1.59	1.21		0.98	1.34		93	0.98	96.0	0.98	96.0									0020		0.93	0.98	0.76	3	0.86				"Values appear unlikely.			
Current	Dir.	(10)		1230	z	z	z		z	z		0730	345°	345	345	345									070		.600	600	600	Ì	600			•				
ant	Speed	(Kt)		0	7.	0.87	1.21		1.21	1.13		2	0.53	0.53	0.53	0.53		0	1.33	1.29	1.4	1.37	1.35		2		0.82	69.0	0.4		09.0							
Current	Dir.	(to)		1130	z	z	z		z	z		0615	300°	300	300	300		1300	°000	000	000	000	000		0615		358°	358	358	2	358							
tus	Speed	(kt)			2.13		1.59		1.84	1.83		_	0.44	_	0.44	+-		_				1.33	1.29				0			0			2,	1.07	1.21	14.	1.21	1.22
Current	Dir.	(to)		1030	z	7	z		z	z		0230	°00	00	300	300		1230	350°	350	350	350	350		0200								1300	035°	035	335	035	035
te te	Speed	(kt)			121				1.70	1.67		_		0	0					1.33		1.33	1.35		0	_	0	0.44	0	0	0.11*		_	1.07			1.07	1.07
Current	Dir.	(to)		00			_		7	_		0430						1200	350°	50	350	20	350		0400			* 500					1200	032°	032	32	032	032
	Speed	(kt)			Z 2		1.21		1.2.1	1.36 N			0	0	-	0			4	1.52 3		1.33 3	1.44 3			0	0		•		H			1.25	_	_	1.12	1.21
Current	Dir.	(to)		0630								0325					-	1130		355		355	355		0300								1125	°26°			920	026
+	Speed	-			Z Z				N 86.0	1.48 N			•	•	0 0	0			.37	1.41 33	_	1.41 33	1.42 3:			0.44	•	•	0	0.44	0.18*			_	0.82		0.93 00	0.99
Current	Dir. S		Miles	0905							l Miles	0245					I Miles	1030	355°			355	355	Miles	0200	*.060				132*		I Miles	1000	023°		023		023
_	7.		Nautica		Z 2	ZZ	z		z	z	Nautico	-				9	Nautica	-	35	35	35	35		Nautico	-	9		_			+-	Noutica	_	-	-	- 6	8	-
	Depth	(meters)	Position: 12.0 Nautical Miles	Time (8ST)→	o w	2	50	25	40	Calculated avg.	Position: 15.0 Nautical Miles	Time (BST)→	10	20	90 9	Calculated avg	Position: 15.0 Nautical Miles	Time (8ST)→	10	20	30	40	Calculated avg.	Position: 20.0 Nauticol Miles	Time (BST)→	0	ν	15	35	2 05	Calculoted avg.	Position: 20.0 Noutical Miles	Time (BST)→) v	. <u>2</u>	35	45 50	Calculated avg.

REFERENCES

- G. L. Bloom Facilities and Measurement Program at Woles, Alaska (Navy Electronics Laboratory, Report 445) 20 May 1954 (CONFIDENTIAL).
- D. W. Pritchard and W. V. Burt "An Inexpensive and Rapid Technique for Obtaining Current Profiles in Estuarine Waters" Journal of Marine Research vol. 10, no. 2, 1951, pp. 180-189.
- W. H. Dall The Currents and Temperatures of Bering Sea and the Adjacent Waters (Coast and Geodetic Survey, Superintendent's Annual Report, 1880, Appendix 16, pp. 297-340).
- R. M. Lesser and G. L. Pickard Oceanographic Cruise to the Bering and Chukchi Seas, Summer 1949; Part II; Currents (Navy Electronics Laboratory, Report 211) 24 October 1949 (CONFIDENTIAL).
- H. U. Sverdrup The Oceans, Their Physics, Chemistry, and General Biology Prentice-Hall, 1942.
- M. Faraday "Experimental Researches in Electricity" Royal Society of London. Philosophical Transactions vol. 122, 1832, pp. 125-162.
- 7. F. B. Young et al. "On Electrical Disturbances Due to Tides

- and Waves" Philasophical Magazine Series 6, val. 40, na. 235, July 1920, pp. 149-159.
- M. S. Lauguet-Higgins "The Electrical and Magnetic Effects of Tidal Streams" Royal Astronomical Society of Landon, Monthly Notices, Geophysical Supplement vol. 5, na. 8, March 1949, pp. 285-307.
- W. V. R. Malkus and M. E. Stern "Determination of Transports and Velocities by Electromagnetic Effects" Journal of Marine Research vol. 11, no. 2, 1952, pp. 97-105.
- G. K. Wertheim Studies of the Electric Potential Between Key West, Florida and Havona, Cuba, Number 2 (Woads Hole Oceanographic Institution, Reference 54-68) September 1954.
- G. L. Pickard and W. K. Lyon Project Aleutians: Attempted Electromagnetic Measurement of Sea Currents in the Bering Strait (Canada, Pacific Oceanographic Group) 28 November 1949 (CONFIDENTIAL).
- Hydragraphic Office, H. O. Miscellaneous 16,366 U. S. Novy Hydragraphic Office Report on Project 572 December 1955 (CONFIDENTIAL).
- E. B. Callaway An Analysis of Environmental Factors Affecting Ice Grawth (Hydrographic Office, Technical Report TR-7) September 1954.



Navy Electronics Laboratory Report 739	1. Oceanography — Arctic regions	Navy Electronics Laboratory Report 739	1. Oceanogrophy — Arctic regions
CURRENT, TEMPERATURE, TIDE, AND ICE GROWTH MEASUREMENTS, EASTERN BERING STRAIT CAPE PRINCE OF WALES 1953, By G. L. Bloom. 25 p., 18 October 1956. An analysis was made of ocean currents determined from electric potential measurements at the Cape Prince of Wales Field Station. Alasko, during the period 1953-1955. It was concluded that (1) a northerly volume transport varying frestitic of the Bering Strait area for the months of August through November; (2) the Barol I and for the months of August through November; (2) the Barol I mainten of the Eastern Bering Strait area of maximum current volocity.	2. Oceanography — Bering Strait 3. Ocean currents — Arctic regions 1. Bloom, G. L.	CURRENT, TEMPERATURE, TIDE, AND ICE GROWTH MEASUREMENTS, EASTERN BERNG STRAIT—CAPE PRINCE OF WALES 1953-1955, by G. L. Bloom. 25 p., 1B October 1956. An analysis was made of accan currents determined from electric potential measurements at the Cape Prince of Wales Field Station, Alasko, during the period 1953-1955, It was concluded that (1) a nonfrestly volume transport varying from 0.8 to 3.1 x 10° cubic meters per second is devocateristic of the Berng Strait area for the months of August through November; (2) the Bio-12 mile section of the Eastern Bering Strait is an area of maximum current velocity.	2. Oceanography — Bering Strait 3. Ocean currents — Arctic regions 1. Bloom, G. L.
	SW 01402 NE 121217-1 (NEL L6-1) This card is UNCLASSIFIED		SW 01402 NE 121217-1 (NEL L6-1) This cord is UNCLASSIFIED
Ray Electronics Laboratory Report 739 Report 739 Recourt 739 MEASURENT, TEAPERATURE, TIDE, AND ICE GROWTH MEASUREMENTS, EASTERN BERING STRAIT—CAPE PRINCE OF WALES 1953-1955, by G.L. Bloom, 25 p., 18 October 1956. An analysis was made of acean currents determined from electric potential measurements at the Cape Prince of Wales Field Station, Alaska, during the period 1953-1955, 11 was concluded that (1) a northerty volume transport varying from 0.8 to 3.1 X 10° cubic meters per second is charac- trianic of the Bering Strait area for the months of August through November; (2) the B4-0.12 mile section of the Eastern Bering Strait is an area of maximum current velocity.	Oceanography — Arctic regions Cocanography — Bering Strait Ocean currents — Arctic regions Bloom, G. L.	Ray Electronics Laboratory Report 739 CUBREATURE, TIDE, AND ICE GROWTH MEASUREMENTS, EASTERN BERNG STRAIT — CAPE PRINCE OF WALES 1953, by G. I. Bloom. 25 p., 18 October 1956. An analysis wos made of ocean currents determined from electric potential measurements at the Cape Prince of Wales Field Starion, Alaska, during the period 1953-1955. It was concluded that (1) an on-therly volume transport varying from 0.8 to 3.1 × 10° cubic meters per second is charac- teristic of the Bering Strait area for the months of August through November; (2) the Bo-12 mile section of the Eastern Bering Strait is an area of maximum current velocity.	Oceanogrophy — Arctic regions Strait Geen currents — Arctic regions Bloom, G. L.
	SW 01402 NE 121217-1 (NEL L6-1)		SW 01402 NE 121217-1 (NEL L6-1)
	This card is UNCLASSIFIED		This card is UNCLASSIFIED

INITIAL DISTRIBUTION LIST

(One copy to each oddressee unless otherwise specified)

Chief, Bureau of Ships (Code 312) (12 copies) Chief, Bureau of Ordnance (Reó) (Ad3) Chief, Bureau of Aeronautics (TD-414) Chief of Naval Operations (Op-37) (2) Chief of Naval Research (Ad3) (2)

Chief of Naval Research (Cade 416) (Cade 466) Commander in Chief, U. S. Pacific Fleet Commander in Chief, U. S. Atlantic Fleet Commander Operational Development Force, U. S. Atlantic Fleet

Attantic Fleet
Commander, U. S. Naval Air Development Center
(Library)
Commander, U. S. Navel Air Missile Test Center
Commander, U. S. Naval Air Test Center (NAKEP) (2)
Commander, U. S. Naval Ordanace Laboratory
(Library) (2)
Commander, U. S. Naval Ordanace Laboratory
(Library) (2)
Commander, U. S. Naval Ordanace Test Station
(Pasadena Annex Library)
Commanding Officer and Director, David Taylor
Model Basin (Library) (2)
Commanding Officer and Director, U. S. Navy
Lindervater Sound Laboratory (Cade 1450) (3)
Director, U. S. Naval Engineering Experiment
Station (Library)
Director, U. S. Naval Research Laboratory (Cade
2021) (2)
Director, U. S. Navy Underwater Sound Reference
Laboratory (Library)
Commanding Branch
Paradona Branch
Library May Naval Research,
Library Laboratory II. S. Navy Naval Research,
Library Library II. S. Navy Naval Research,
Library Library II. S. Navy Naval Research,
Library III. S. Navy Naval Research,
Library II. S. Navy Naval Research,
Library III. S. Navy Naval Research,
Library II. S. Navy Naval R

Commanding Officer, Office of Naval Research, Pasadena Branch
Hydragrapher, U. S. Navy Hydragraphic Office (1)
(Air Weather Service Itaison Office) (1)
(Division of Oceanography) (1)
Senior Navy Liaison Officer, U. S. Navy Electronics
Liaison Office
Superintendent, U. S. Naval Postgraduate School
(Library) (2)
Assistant Secretary of Defense (Research and Development) (Technical Library Branch)

Assistant Chief of Stoff, G-2, U.S. Army (Document

Assistant Chief of Stoff, G-2, U. S. Army (Document Library Branch) (3) Chief of Engineers, U. S. Army (Engineer Research and Development Division, Field Engineering Branch)

Branch)
The Quartermoster General, U.S. Army (Research and Development Division, EBR Liaison Officer)
Commonding General, Redstone Arsenal
Commonding General, Redstone Arsenal
Commonding Officer, Transportation Research and Development Commond (ICRAD-TO-1)
Chief, Army Field Forces (ATDEV-B)
Resident Member, Beach Erosion Board, Corps of Engineers, U.S. Army
Commonder, Air Defense Commond
(Office of Operations Analysis, John J. Crowley)
CR.-502B)
CR.-502B; Art University (Air University Library,
Commonder, Strategic Air Commond

Cammander, Air University (Air University Library, CR-5028)
Commander, Strategic Air Command
(Operations, Analysis)
Commander, Air Farce Cambridge Research Center
(CRQST-2)
Executive Secretary (Jahn S. Coleman), Committee
on Underseo Warfore, National Research Council
Commandant, U. S. Casti Guard (Aerology and
Oceanography Section)
U. S. Cast Guard (Aerology and
Oceanography Section)
U. S. Cast Guard (Secretary)
U. S. Fish and Wildlife Service, Pacific Oceanic
Fishery Investigations (Library), Hanolulu
U. S. Fish and Wildlife Service, Lo Jolla, California
(South Pacific Fishery Investigations, Jahn C. Marr)
Brown University, Director, Research Analysis Group
University of California, Director, Marrine Physical
Lobarotory, Son Diego, California

University of California, Director, Scripps Institution of Oceonography (Library), LaJolla, California he for Ceonography (Library), LaJolla, California he for the control of the control

VIA BUREAU OF SHIPS:

The Admiral, British Joint Services Mission (Navy Staff) (3)