
Ministerie van de Vlaamse Gemeenschap Departement Leefmilieu en Infrastructuur Afdeling Waterwegen en Zeewezen Afdeling Waterbouwkundig Laboratorium en Hydrologisch Onderzoek

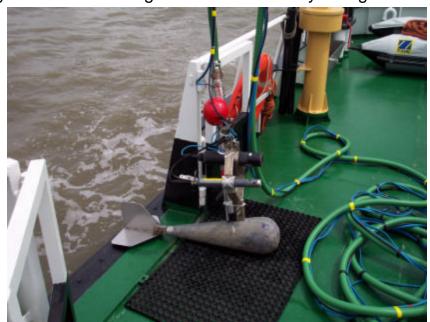

STUDIE DENSITEITSSTROMINGEN IN HET KADER VAN LTV SCHELDE

STROOM- EN SALINITEITSMETING T.H.V. DEURGANCKDOK UITGEVOERD OP 12/06/2002

I/RA/11216/02.042/CMA 25/12/2002

en



i.s.m.



Afdeling Maritieme Toegang Tavernierskaar 3 2000 Antwerpen –Belgie tel+32 3 222 08 25 fax +32 222 08 51

WL | Delft Hydraulics Rotterdamseweg 185 2629 HD - Delft – Nederland tel: +31.15.285.85.85 fax: +31.15.285.85.82 E-mail: info@wldelft.nl

wL delft hydraulics

International Marine and Dredging Consultants (IMDC) Wilrijkstraat 37-45 Bus 4 2140 Antwerpen - België tel: +32.3.270.92.95 fax: +32.3.235.67.11 E-mail: IMDC@technum.be

1	INTRODUCTION	1
1.1	THE ASSIGNMENT	1
1.2	PURPOSE OF THE MEASUREMENT CAMPAIGN	
1.3	THE REPORT	
2	THE MEASUREMENT CAM PAIGN	3
2.1	D ESCRIPTION OF THE MEASUREMENT CAMPAIGN	3
2.2	THE EQUIPMENT	
3	THE MEASUREMENTS	
3.1		
	1 ADCP measurements	
	2 CTD measurements	
	1 Vertical tide during the measurement	
	Vertical lide during the measurement Meteorological data	
3.3	Naval Traffic	
4	PROCESSING OF THE DATA SETS	
-		
4.1	METHODOLOGY OF PROCES SING	
4.1.	1 Processing of the ADCP data set	
	4.1.1.1 Remark on the processing of the ADCP data set	
	2 Processing of the CTD results	
4.2	STORAGE OF THE DATA	8
5	REFERENCES	9
TABLE	1 · OLIDIVEV OF THE MEAGLIDEMENT CAMPAIGNIC THAT HAVE DEEN COMPLICATED FOR THE	
	1: SURVEY OF THE MEASUREMENT CAMPAIGNS THAT HAVE BEEN CONDUCTED FOR THE FULL FULL FOR THE FULL FULL FOR THE FULL FULL FULL FULL FULL FULL FULL FUL	2
TABLE	2 AVERAGE START AND ENDPOINT OF ADCP MEASUREMENT TRACKS	∠
	3 AVERAGE POSITION OF THE CTD MEASUREMENT POINT	
	4 HIGH TIDE AND LOW TIDE LIEFKENSHOEK ON 12/06/2002	
	5 COMPARISON OF THE TIDAL CHARACTERISTICS OF 12/06/2002 WITH THE AVERAGE TIDE.	
	HE AVERAGE NEAP TIDE AND THE AVERAGE SPRING TIDE OVER THE DECADE 1981-19	90 5
	6 COORDINATES (UTM-ED50) OF THE "THEORETICAL MEASUREM ENT TRACK"	
	DIX 1 : TIDAL DATA FOR ALL THROUGH TIDE MEASUREMENT LOCATIONS ON 12/06/2002	
	DIX 2: THE EQUIPMENT USED	
	DX 3 : SURVEY OF THE NAVAL TRAFFIC	
	DIX 4: PLAN OF THE MEASUREMENTS	
	DIX 5: START AND ENDPOINT OF THE SAILED ADCP LINES, SAILED LENGTH AND COURSE	
	DIX 6: COORDINATES OF CTD MEASUREMENT POINTS, BOTTOM DEPTH, AND MAXIMUM &	
	NMUM MEASUREMENT DEPT H	
A PPEND	DIX 7: GRAPHIC SURVEY OF THE SAILED ADCP MEASUREMENT TRACKS	
	DIX 8: GRAPHIC SURVEY OF CTD MEASUREMENT LOCATIONS	
A PPEND	DIX 9: PROCESSING OF THE ADCP DATA SET	
A PPEND	DIX 10: P ROCESSING OF THE CTD DATA SET	
A PPEND	DX 11: C ALCULATION OF THE SALINITY (PPS-78 FORMULA)	
A PPEND	DIX 12: O RGANISATION OF THE FILES	

1 INTRODUCTION

1.1 The assignment

On March 1, 2002 the the study "Densiteitsstromingen Schelde in het kader van LTV" (16EB/01/01) assigned by WLHO (Departement Leefmilieu en Infrastructuur, Afdeling Waterwegen en Zeewezen, Afdeling Waterbouwkundig Laboratorium en Hydrologisch Onderzoek) to WL Delft Hydraulics in association with IMDC has started.

The study consists of the following parts:

- The set up and execution of an extensive measurement campaign
- The building of a physical model, including the access channel to a sluice
- The building of a 3D numerical model
- The writing of a report on future possible actions that can be taken in order to obtain a better understanding of the functioning of sedimentation and silt transport in the Lower Scheldt
- The transfer of the numerical models to the WLHO, including the necessary training sessions.

This report is written as part of sub-assignment 1: the set up and execution of an extensive measurement campaign.

1.2 Purpose of the measurement campaign

The through tide measurement campaign conducted at Waarde is part of the extensive measurement campaign in the study on density currents in the river Scheldt, in the framework of the Scheldt Long Term Vision (LTV). In addition to long term measurement campaigns at certain designated posts along the river Scheldt, the measurement plan also covered two series of through tide measurements at different locations on June 5th and 12th 2002.

The purpose of the measurement campaign was to supply a coherent set of data which will not only be applied in the calibration and validation of the numerical models and the physical model that are being developed in the framework of the study on density currents on the one hand, but which could also contribute to the knowledge of the behaviour of density currens in the river Scheldt, and more specifically around the areas of the Kallo Lock and the future Deurganckdock.

The measurement at the Deurganckdok area were carried out in order to characterize the flow pattern and the salinity distribution in the vicinity of the future Deurganckdok.

Table 1 gives an overview of the measurement campaign and the resulting factual data reports. Appendix 4 is a survey of the entire measurement plan, with the locations of the through tide measurement campaigns and the long term measurement locations.

This report is the factual data report of the through tide current and salinity measurements at Deurganckdok on June 12th 2002. An interpretation and analysis of the measurement data will be made in the data analysis report (I/RA/11216/02.045/CMA), which is in preparation.

Measurement Location	Measurement Period	Type of Measurement	Report number
Waarde	5/06/2002	Through tide current and salinity measurement	I/RA/11216/02.036/CMA
Waarde	12/06/2002	Through tide current and	I/RA/11216/02.037/CMA

I/RA/11216/02.042/CMA 1 25/12/2002 rev. 1.0

		salinity measurement	
Oosterweel	5/06/2002	Through tide current and	I/RA/11216/02.038/CMA
		salinity measurement	
Oosterweel	12/06/2002	Through tide current and	I/RA/11216/02.039/CMA
		salinity measurement	
Deurganckdok	5/06/2002	Through tide current and	I/RA/11216/02.041/CMA
		salinity measurement	
Deurganckdok	12/06/2002	Through tide current and	I/RA/11216/02.042/CMA
		salinity measurement	
Kallo	5/06/2002	Through tide current and	I/RA/11216/02.043/CMA
		salinity measurement	
Kallo	12/06/2002	Through tide current and	I/RA/11216/02.044/CMA
		salinity measurement	
Zandvliet			
Lillo-Ponton			
Deurganckdok			
Schelle	June 2002	Long term current and	I/RA/11216/02.046/FDK
Oosterweel		salinity measurement	
Petroleum			
steiger			
Kallo	June 2002	Long term current and	I/RA/11216/02.047/FDK
		salinity measurement	
Merelbeke	June 2002	Discharge measurement	I/RA/11216/02.029/CMA
Analysis of the	data	I/RA/11216/02.045/CMA	

Table 1: survey of the measurement campaigns that have been conducted for the study on density currents in the river Scheldt.

1.3 The report

The first chapter forms the introduction, with a short description of the measurement campaign. Chapter 2 describes the measuring equipment used. Chapter 3 includes the proceedings of the measurement campaign. In chapter 4 the processing of the data set and the measurement results are presented.

profiling was conducted at point dc3.

2 THE MEASUREMENT CAMPAIGN

2.1 Description of the measurement campaign

The current and salinity measurement took place at Deurganckdok on June 12th 2002 from 4:30 MET until 18:00 MET and was conducted by Afdeling Maritieme Toegang (AMT).

In consultation with WLDelft, the measurement tracks were changed with respect to the measurements conducted on june 5th 2002. More importance was given to longer ADCP measurements, with 4 measurements tracks, and one CTD measurement point. In order to garantuee the continuity, the CTD profiling point was chosen to be point DC3, that had been continuously measured during the previous measurement campaign on 5/06/2002. At the start of every hour an ADCP cycle was started. After finishing the four tracks, CTD

Appendix 4 is a survey of the entire measurement plan, with the locations of the through tide measurement campaigns and the long term measurement locations.

Appendix 7 offers a survey of the measurement location with sailed ADCP tracks, whereas Appendix 8 gives a survey of the location where CTD profiles were measured.

Table 2 displays the average start and end point of the ADCP measurement tracks and the average length.

Table 3 gives the average position of the CTD measurement points and the bottom depth at those locations.

name	Start	Start	End	End	Average
	easting	northing	easting	northing	length
Da1	589829.22	5684338.83	589230.78	5684727.3	721.14
Da2	589699.89	5683817.92	589834.1	5684301.04	527.3
Da3	588461.43	5686086.71	589680.97	5683822.22	1476.54
Da4	589227.52	5684724.7	588532.28	5686054.16	1509.87

Table 2 Average start and endpoint of ADCP measurement tracks

name	Easting	Northing	Bottom depth (mTAW)
Dc3	589258.8	5684720	-8.8

Table 3 average position of the CTD measurement point

2.2 The equipment

The current measurements were conducted with a RDI 600 Khz ADCP apparatus which had been attached to the vessel Veremans and connected to the installed dGPS.

The apparatus was set so as to realize one ensemble per 5 seconds. The vertical resolution ("bin size") was set to 0.5 meters. A configuration file was recorded at the start of the measurements.

The conductivity and salinity profiling measurements were conducted with a Valeport 602 device, coupled with a measurement fish. While the fish was raised from the bottom to the water level, temperature and conductivity were measured at regular intervals, with a higher measurement frequency near the bottom. Positioning was determined by a DGPS.

I/RA/11216/02.042/CMA 3 25/12/2002 rev. 1.0

3 THE MEASUREMENTS

3.1 Measurement periods

3.1.1 ADCP measurements

14 series of a ADCP measurements tracks have been conducted. All measurement series started with the da4 track, followed by the da3, da2 and da1 tracks. Appendix 7 gives a graphic survey of the sailed ADCP tracks, Appendix 5 gives the start and end points of the tracks, the sailed length and the course.

3.1.2 CTD measurements

As was already mentioned in §3.1.2 one measurement point was kept in comparison with the measurements of 5/06/2002. Only at point dc3 (located centrally) ctd profiling measurements were conducted during the 14 measurement cycles.

Appendix 6 gives the X and Y coordinates (UTM-ED50) of every measurement point, the bottom depth in mTAW, the maximum and minimum depth on which measurements took place and the depth averaged temperature and salinity.

Appendix 8 is a graphic overview of the locations of the CTD measurements...

3.2 Hydro-meteorological conditions during the measurement campaign.

3.2.1 Vertical tide during the measurement

The vertical tide was measured at the Liefkenshoek tidal measuring station. A graphical representation of the tide, together with the tidal registrations for the other measurement locations of the through tide measurements can be found in Appendix 1

Table 4 gives the most important characteristics (high and low tide) of the tide at Liefkenshoek on the day of the measurements

	Time	Water level	
	(hh:mm MET)	(mTAW)	
HW (1)	4:10	5.48	
LW (2)	11:05	-0.05	
HW (3)	16:35	5.61	
LW (4)	23:35	-0.16	

Table 4 high tide and low tide Liefkenshoek on 12/06/2002

Table 5 compares the tidal characteristics of the measurement day to the average tide, the neap tide and the spring tide over the decade 1981-1990 (Claessens and Meyvis, 1994).

The tidal coefficient of 1.10 to 1.14 indicates a spring tide that is slightly lower than average.

I/RA/11216/02.042/CMA 4 25/12/2002 rev. 1.0

Liefkenshoek	Neap tide ('81-'90)	Average Tide ('81-'90)	Spring Tide ('81-'90)	Tide 12/06/2002
Water level (mTAW)				
HW (1)	4.55	5.14	5.61	5.48
LW (2)	0.43	0.1	-0.12	-0.05
HW (3)	-	-	-	5.61
LW (4)	-	-	-	-0.16
Tidal difference (m)				
Falling(1→2)	4.12	5.04	5.73	5.33
Rising (2→3)	4.12	5.04	5.73	5.66
Falling (3→4)	-	-	-	5.77
Duration (hh:mm)				
Falling(1→2)	6:43	6:53	07:04	6:55
Rising (2→3)	5:59	5:33	05:16	5:30
Falling (3→4)	-	-	-	7:00
Tide $(1\rightarrow 3)$	12:42	12:26	12:20	12:25
Tide (2→4)	-	-		12:30
Tidal coefficient				
Falling(1→2)	0.81	1	1.14	1.10
Rising($2\rightarrow 3$)	0.81	1	1.14	1.12
Falling(3→4)	-	-	-	1.14

Table 5 comparison of the tidal characteristics of 12/06/2002 with the average tide, the average neap tide and the average spring tide over the decade 1981-1990.

3.2.2 Meteorological data

The wind velocity and direction was measured at Deurne meteorological station. On the 12^h of June, the wind was blowing in an WSW-SW direction, with velocities from daily average18 to maximum 50 km/h.

The average air temperature was 16.7 ° C. (KMI maandbericht, 2002)

3.3 Naval Traffic

A survey of the naval traffic is given in Appendix 3.

4 PROCESSING OF THE DATA SETS

4.1 Methodology of processing

In the following chapter the results of the ADCP and CTD measurements will be discussed, as well as the processing of the data.

4.1.1 Processing of the ADCP data set

An overview of the ADCP measurements has already been given in Table 2.

The results of the ADCP measurements can be found in Appendix 9. The processing of the data was carried out by IMDC.

The software package TRANSECT was used to process the raw data.

The movement of the ADCP sensor during the recording has been calculated with the "bottom track" information. This "bottom track" information is recorded by the ADCP itself during the measurements. Flow velocity and direction were calculated with the help of the "bottom track" information.

The validation of the ADCP data has been conducted on a visual basis and on the basis of the calculated discharge data per measured cel ("bin"): in cases where the value given for this discharge was the dummy value, it was supposed that the velocity information for this particular cel was unreliable. Cells with unreliable data were deleted.

The values for the bottom depth were deduced from the adcp measurements. In case where no bottom depth value was available a dummy value is given.

Further processing of the ADCP data included:

For the da1 and da4 masurement tracks

- Drawing a contouring map over the section of the perpendicular velocity
- Drawing a contouring map over the section of the parallel velocity
- Drawing the variation in depth averaged perpendicular and parallel velocity along the measurement line
- Drawing the velocity magnitude and direction along the measurement line
- Calculation of the cross-sectional averaged velocity over the sailed cross-section

For the da3 measurement tracks

- Drawing a contouring map over the section of the u velocity
- Drawing a contouring map over the section of the v velocity
- Drawing the variation in depth averaged u and v velocity along the measurement line
- Drawing the velocity magnitude and direction along the measurement line

For the da2 measurement tracks

- Drawing a contouring map over the section of the perpendicular velocity
- Drawing a contourig map over the section of the parallel velocity
- Drawing the variation in depth averaged velocity and the discharge along the measurement line
- Drawing the velocity magnitude and direction along the measurement line

V/RA/11216/02.042/CMA 6 25/12/2002 rev. 1.0

- Calculation of the total discharge over the sailed section
- Calculation of the area of the sailed cross-section
- Calculation of the cross-sectional averaged velocity over the sailed cross-section

For the processing of the ADCP data, the data measured along the da1, da2 andda4 tracks were projected on an "theoretical measurement track", in order to make comparisons between the different measurement cycles more straightforward. This "theoretical measurement track" was defined as the track between the two outermost measurement points. Table 6 gives the coordinates of start and ending point of the tracks.

The data collected along the da3 track were not projected on an average track. The shape of the track was such that projection would have affected the presentation and understanding of the data in a negative way. Therefore no projection has been applied on the dataset.

	Start	Start	End	End
	Easting	Northing	Easting	Northing
Da4	589247.5	5684687.81	588438.29	5686108.42
Da3			-	
Da2	589650.97	5683828.57	589898.47	5684267.03
Da1	589863.2	5684306.63	589235.96	5684747.24

Table 6 coordinates (UTM-ED50) of the "theoretical measurement track"

The velocity measurements have been extrapolated upwards and downwards.. In the downward direction, a region of approximately 2 to 2.5 meters was extrapolated, in the upward direction, around 2 m. The upward extrapolation was done using a constant value. The downward extrapolation was conducted using Equation 4-1 (Van Rijn, 1993).

$$v = v_1 \left(\frac{z}{z_1}\right)^{0.25} \tag{4-1}$$

in which v₌ current velocity in the first measurement point above the bottom z_i=height of the first measurement point above the bottom

For the drawing of the contouring maps, the data was interpolated on a regular 40*15 points grid. For the drawing of the contouring plots of the non-projected track (Da3), the data was interpolated at 25 m intervals (horizontally) over 15 points (vertically).

The current velocities are negative in the flood direction and positive in the ebb direction. Or for the tracks with a N-S orientation, positive to the West, negative to the East. The discharge was calculated by multiplying the depth-average velocity per ensemble with the distance to the following ensemble, multiplied by the height of the ensemble.

4.1.1.1 Remark on the processing of the ADCP data set

Due to a problem with the gyrocompass settings during the recording of the measurement series 56 and 57, the data proved to be unreliable. The datasets (containing the tracks da1-56,

da2-56, da3-56, da4-56 and da1-57, da2-56, da3-57 and da4-57 were not included in the processing)

4.1.2 Processing of the CTD results

In Appendix 6 a survey is given of the CTD measurement points. The results of the CTD processing can be found in Appendix 10.

The salinity was calculated from the temperature and conductivity using the pps-78 formula (UNESCO,1991). Appendix 11 gives the calculation.

The validation of the CTD data was done visually: data showing strong deviations were deleted from the profiles.

The coordinates as well as the values for the bottom depth were deducted from the ADCP measurement that were conducted during the CTD profiling.

For every CTD profile a measurement report was made. Besides general information, this report contains a graphical representation of the conductivity, the temperature and the salinity in function of the depth. The measurement values are represented in a table (in the case of measurements at relatively deep points not all measurement values are notated) and the depth averaged values for salinity, temperature and conductivity are given.

4.2 Storage of the data

The content of the folder "Deurganckdok 1206" in the CDROM 11216-1 are the following directories:

- -RA02042-Deurganckdok12062002 : the electronic version of this report
- -"processed adop data"

da*n.txt : validated data, in the agreed format

-"processed ctd data":

dc*n.txt : validated data

5 REFERENCES

N.P.Fotonoff and R.C.Millard Jr (1983.), 'Algorithms for computation of fundamental properties of seawater', N.P.Fotonoff and R.C.Millard Jr., Unesco technical papers in marine science, Unesco 1983.

KMI maandbericht (2002) Klimatologische waarnemingen juni

Meyvis en Claessens (1991) Overzicht van de tijwaarnemingen in het Zeescheldebekken gedurende het decennium 1981-1990

Unesco (1991) Processing of Oceanographic Station Data

Van Rijn, L. (1993) Principles of Sediment Transport in rivers, estuaries and coastal seas.

APPENDICES

- Appendix 1: Tidal data for all through tide measurement locations on 12/06/2002
- Appendix 2:The Equipment Used
- Appendix 3 : Survey of the naval traffic
- Appendix 4: Plan of the measurements
- Appendix 5: Start and endpoint of the sailed ADCP lines, sailed length and course
- Appendix 6: Coordinates of CTD measurement points, bottom depth, and maximum & minimum measurement depth
- Appendix 7: Graphic survey of the sailed ADCP measurement tracks
- Appendix 8: Graphic survey of CTD measurement locations
- Appendix 9: Processing of the ADCP data set
- Appendix 10: Processing of the CTD data set
- Appendix 11: Calculation of the salinity (pps-78 formula)
- Appendix 12: Organisation of the files