

Grain-Size Trend Analysis for the Determination of Non-Biogenic Sediment Transport Pathways on the Kwinte Bank (southern North Sea), in Relation to Sand Dredging

Serafim E. Poulos^{1*} and Arnaud Ballay^{1**}

¹ Department of Geography and Climatology
Faculty of Geology and Geoenvironment
National and Kapodistrian University of Athens
Panepistimioupolis, Zografou
15784 Athens, Greece
*poulos@geol.uoa.gr

^{**} EcoPlage
100 route de Clisson F44200
Nantes, France



ABSTRACT

Grain-size trend analysis is applied to the determination of sediment transport pathways over the Kwinte Bank, southern North Sea; which had been subjected to intensive dredging, within the context of the environmental impact of dredging activities. On the basis of the results of grain-size trend analysis, focused mainly upon the transportation of the non-biogenic sedimentary material (<2 mm), it appears that: (i) there is a main sediment pathway over the western (bank crest) and central (dredged area) part of the bank directed toward the NE; whilst a secondary pathway is established over its eastern gently-sloping flank, having a SE direction. Further, the present analysis shows that the area of the central (dredged) depression acts more as a 'by-passing' zone rather than as a depo-centre for the non-biogenic sediments. Comparison undertaken with the results of an earlier investigation, for a non-dredged area at the northern end of the same bank, reveals that the depression due to dredging modifies significantly the sediment transport pathways; this may be attributed to a change in the seabed morphology which, in turn, modifies the near-bed hydrodynamics (related to tide and/or storm events).

ADDITIONAL INDEX WORDS: *linear sandbank, dredging effects, grain-size trend analysis, southern North Sea.*

INTRODUCTION

The establishments of sediment transport direction is one of the major concerns in the study of sedimentary systems within the marine environment. The analysis of spatial changes in grain-size parameters (mean, sorting and skewness) is one of the methods used for the identification of net sediment transport pathways. The initial studies undertaken focused upon variations of an individual parameter, such as mean grain-size (e.g. PETTJOHN, POTTER, and SIEVER, 1972). However, the use of a single parameter is not always diagnostic for sediment movement because, depending on the type of environment under consideration, grain-size parameters may increase or decrease down-drift. A major improvement in grain-size trend analysis was presented by McLAREN (1981), who used a combination of the three main grain-size parameters: mean size, sorting and skewness. Subsequently, McLAREN and BOWLES (1985) developed a statistical treatment of the grain-size data, which provided a 1-D model of net sediment transport, as pathways. According to the McLaren model, although there are theoretically 8 possible combinations of the above-mentioned statistical parameters, only 2 combinations have a higher possibility of existing in natural environments, where sediment transport occurs in a downstream direction: (1) finer, better sorted and more negatively skewed; or (2) coarser, better sorted and more positively skewed. Subsequently, McLaren's method has

been used with satisfactory results as in the case of the Severn Estuary (UK) (McLAREN *et al.*, 1993), in a fjord of British Columbia (McLAREN, CRETNEY, and POWYS, 1993); this approach was eventually standardised, i.e. patented (McLAREN, 2001).

GAO and COLLINS (1992) re-examined the basic assumptions of the grain-size trend analysis; they argued that, although the two cases described previously may be the dominant ones, the presence of other factors can cause a high level of noise using the 1-D approach. These investigators have shown further that some trends occur in the transport direction, with a higher frequency of occurrence than in any other direction. For comparison, in the McLaren method, it is assumed that in the transport direction only certain types of trends can occur, whilst others do not occur. Thus, these latter authors developed an analytical procedure for grain-size data, based on a semi-quantitative filtering technique; this incorporates an adequate significance test and uses the combined trend of the two main cases (GAO and COLLINS, 1991, 1992 and 1994a). This procedure results in the calculation of a 2-D residual pattern of transport vectors.

The present contribution presents a grain-size trend analysis, following the GAO and COLLINS (1992) procedure, for the Kwinte Bank in the Belgian part of the North Sea. This method was adopted, primarily, as it is widely-accepted and has produced good results in tidal environments; and, secondarily, due to the fact that it has also been applied previously and successfully in the case of the Kwinte Bank (GAO *et al.*, 1994). Within the context of the environmental impact of dredging activities, the present trend analysis is focused mainly upon

of more than 20 m (GAO *et al.*, 1994). Differences between sediment transport directions given by the grain-size trend analyses, with those indicated by bedform morphometry (e.g. megaripples), may be attributed to their different spatial- and time-scales of operation. The former are influenced often by other local structural (geological) characteristics and, being the result of extreme events, occurred over a much longer period of time (tens to hundreds of years).

DATA COLLECTION AND METHODOLOGY

In September 2003 and February 2004, 120 samples (from the same locations) were collected with the use of a van Veen grab, during MAREBASSE / EUMARSAND campaigns (*R/V Zeeleeuw*). The interval between successive stations was 300 m on the edges of the grid and 150 m over the central dredged depression (Figure 2.).

The samples have been sub-sampled and analysed, following decarbonising with an HCl solution, in order to estimate and remove the biogenic fraction (the shell content), as the present investigation focuses upon the transport pathways of the non-biogenic sediment component. Moreover, the biogenic fraction of the sediment was removed for analytical reasons, i.e. to improve the accuracy of the grain-size trend analysis. The shell content incorporates usually a bimodal grain-size distribution, resulting in inaccuracy in the grain-size determination using settling velocities; its abundance on the sea floor is variable, depending upon localised benthic environmental conditions.

In addition, shell fragments are somewhat different from the quartz grains, in terms of their density and morphology; as such, they differ in terms of their settling, transport and sorting characteristics. Besides, shell fragments are not usually uniformly distributed over the seabed; they are more abundant in some areas, being rare in other; they follow not exclusively near-bed hydrodynamics, but also the local biologic production (benthic and/or neritic). Hence, the use of the bulk sediment would have introduced some additional differences into the sediment texture, related to sediment transport.

Following decarbonising, sediment samples were analysed, by means of a settling tower, to determine the settling velocities (W_s) of the individual particles; these, in turn, have been converted into equivalent sieve diameters, according to the SOULSBY (1997) equations. Sediment grain-size fractions were identified according to the Wentworth classification (1922); their statistical parameters needed for the trend analysis method, i.e. mean grain-size, sorting, skewness, were calculated using statistical moment theory (RIVIERE, 1977).

For the determination of sediment transport pathways, using the statistical parameters of the grain-size analyses, the procedure described by GAO and COLLINS (1992) has been adopted. This method is based upon the relationship between spatial changes in grain-size trends and the residual transport directions. Thus, grain-size parameters are compared between pairs of sampling sites, considering the increase or decrease in three parameters: mean grain-size (M_z), sorting (σ_1) and skewness (S_k). Consequently, 8 cases are theoretically possible; of these, only 2 are representative of physical reality in non-extreme marine conditions (GAO and COLLINS, 1992; GAO and COLLINS, 1994a; and McLAREN and BOWLES, 1985). If transport takes place from Site 1 to Site 2, 2 cases can be valid, either *Case 1*: $\sigma_{12} \leq \sigma_1$, $M_{z1} > M_{z2}$, and $S_{k2} \leq S_{k1}$ (in a downstream direction, sediment becomes finer, better sorted and

more negatively skewed); or *Case 2*: $\sigma_{12} \leq \sigma_1$, $M_{z2} > M_{z1}$, and $S_{k2} \geq S_{k1}$ (sediment becomes coarser, better sorted and more positively skewed). Notably, these two cases do not represent extreme environments, in which, for example, sediment is trapped or reworked intensively, or transport agents are not selective. For this reason, a three-step approach has been followed: the first step, as proposed by GAO and COLLINS (1992), consists of the verification that the two aforementioned cases are indeed valid for a study area (see below); the second step refers to the calculation of the three grain-size parameters (according to FOLK, 1974), by means of the equations issued from the statistical moment theory (RIVIERE, 1977); and, finally, the third step incorporates the application of the computerised analytical procedure developed by GAO (1996), to the calculation of the transport vectors.

The Kwinte Bank is under the influence of tidal currents and oscillatory flows related to wave activity, which are selective transport agents; this means that the particle sorting, in all cases, increases in the downstream direction. Furthermore no sediment accumulation has been observed over the study area between 1992-1997 (DEGRENDELE *et al.*, this volume), which is consistent with the relatively "homogeneous" grain-size distribution pattern. Therefore, the two aforementioned cases are expected to be representative of the local non-biogenic sediment transport, in the case of the Kwinte Bank area. Realising step 3 (see above), initially, a critical maximum distance (D_{cr}) has to be selected between two neighbouring sampling sites, whose grain-size parameters are compared. Thus, with the use of all sampling locations, contour maps for the grain-size statistical parameters of the area under investigation has been created; then, common data points have been re-sampled every 300 m, in order to produce a grid with even D_{cr} .

Subsequently, dimensionless "trend vectors" are drawn between every two sites (separated by D_{cr}), following the GAO and COLLINS (1992) procedure; this is based, for a single analysis, upon the consideration of the two types of transport occurring at the same time, i.e. a combination of *Case 1* and *Case 2*. Finally, the following calculations are undertaken for each site: (1) the "resultant vector", which is the sum of the trend vectors; and (2) the "transport vector", calculated with the filtering procedure developed by GAO and COLLINS (1992, 1994a). This approach allows the resultant vectors from the neighbouring sites (e.g. within the D_{cr}), to be taken into account; this in turn, leads to the calculation of a weighted-average. Subsequently, these produce all the transport vectors of the pattern of the residual transport, which enables recognition of the main transport directions.

It should be noted that it is impossible to attribute any quantitative significance to the length of these composite transport vectors, without introducing a bias towards one of the grain-size parameters (LE ROUX, 1994). Hence, with the use of the GAO and COLLINS (1992) method only the sediment transport pathways are determined and not the associated transport rates.

RESULTS AND DISCUSSION

The results of the application of the GAO and COLLINS (1992) procedure, applied to the results of both the sampling campaigns of September 2003 and February 2004, are presented in Figure 3. The analyses of the two series of samples generate generally similar results, which indicates the dominance of

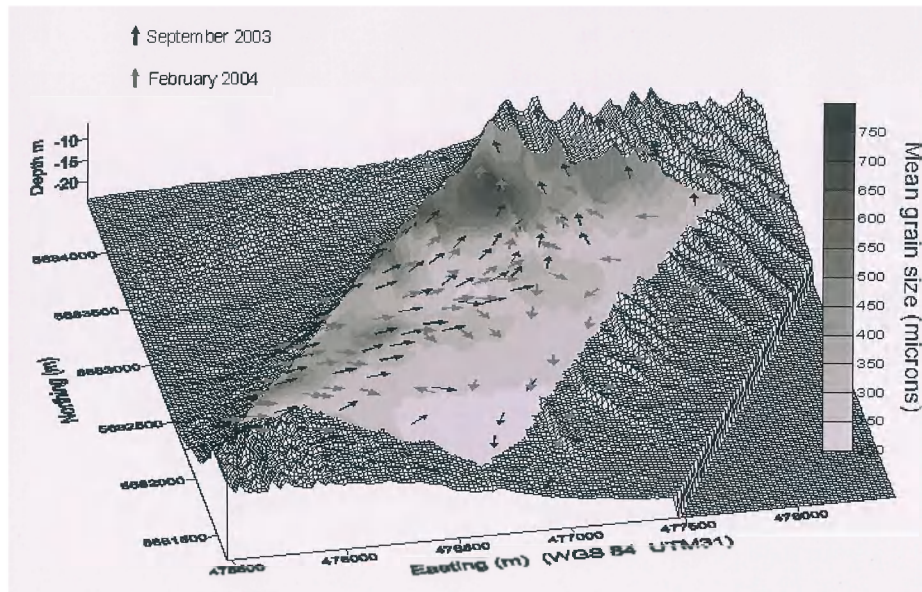


Figure 3. Transport patterns: September 2003 (black arrows) and February 2004 (grey arrows), shown in relation to the grain-size distribution over the sampled area (see Figure 2.).

relatively similar prevailing hydrodynamic conditions, either for a short period of time prior to the (two) campaigns and/or for the whole of the period between them.

Over the western part of the bank and, more specifically along its crest area and the western flank of its central depression (formed by dredging), the transport vectors have a NE orientation, indicating sediment transport towards the depression. Here, the bed material is composed of heterogeneous medium to coarse shelly sand (shell content 40-55%) (BELLEC *et al.*, this volume). On the other hand, this vector direction is in accordance with the main axis of the observed large bed forms, i.e. the elongated subaqueous dunes. Further, it should be noted that the direction of the vectors become progressively NNE towards the northern part of the study area; finally, they are directed northwestwards, at its northern limit. Here, the crest of the bank is higher and the bank itself bends, with its elongated axis being directed towards the North.

Within the lower (southern) and middle part of the dredged area, the sediment transport vectors derived from both campaigns indicate a general NE direction of sediment transport; at its northern part, the sediment transport pathways are directed towards the NNE. Once again, this change may be associated with the orientation of the existing mega-bedforms (e.g. sand waves) and the morphology of the Kwinte Bank. Nevertheless, the artificially-made depression appears to act as a sediment transport pathway, rather than being a depo-centre. Here, the sediment are more homogeneous ($Mz \approx 400 \mu m$ and 10-40% shell fraction; BELLEC *et al.*, this volume). This interpretation is in accordance with the findings of DEGRENGELE *et al.* (this volume), who state that over a period of 8 years (1992-1999), no significant morphological changes can be identified. Furthermore, this pattern is in accordance with the observed currents acting over the area (VAN DEN EYNDE *et al.*, this vol-

ume), which permit the transport of these coarse and shelly sediments. Overall, it appears that sediment is transported from the crest, towards the eastern flank of the bank, despite the presence of the dredged depression.

The gently-sloping eastern flank of the bank, characterised by homogeneous fine to medium sand with a shell fraction generally <20% (BELLEC *et al.*, this volume), presents a transport pattern that could be distinguished into two sub-regions: (a) a northern one, where the vectors are directed towards the NNW; and, (b) a central/southern one, where vectors are more or less directed southerly.

Some vectors located at the boundary of the study area may show various orientations and directions; however, they have not been incorporated into the analysis, having been attributed to the 'edge effect'. Transport vectors on the edge of the grid use less neighbour points, for their calculation (GAO and COLLINS, 2001). The latter limitation would explain also some differences in direction along the east boundary of the study area, between the September 2003 and February 2004 results.

In terms of the prevailing tidal regime, the sediment transport pathways of the surficial non-biogenic (<2 mm) material of the western side (crest and depression) of the bank appear to be controlled by the flood phase of the tide, whilst its eastern flank by the ebb tide; this is in accordance to the residual flows identified by GAREL (*this volume*). Moreover, the derived transport pathways do not coincide with the mean flood/ebb directions, as they are influenced also by the presence of bedforms and, more specifically, by the presence of asymmetrical dunes (wavelengths >30 m) and megaripples (wavelength of 5-10 m) (LANCKNEUS *et al.*, 1993). Furthermore, the influence of wave activity, under storm conditions and, particularly for the crest region of the bank, could not be excluded. For example, in the case of

similar sandbanks in the Bristol Channel (UK), it has been established that the height of the banks is controlled by the storm conditions (BRITTON and BRITTON, 1980). The latter observation is a matter for further investigation, relating to the combined effect of storms and tides.

Finally, if the findings of the present investigation are compared to those produced previously by GAO *et al* (1994), for the northern end of the Kwinte Bank (where sediment pathways are directed towards its crest, having an E-ESE direction along its steep western flank and NW along its eastern more gentle flank), on the assumption that the whole body of the bank is subjected to the same hydrodynamic (tidal) regime, then it may be concluded that the presence of the depression (due to dredging) has modified significantly the near-bed hydraulic regime (GAREL, this volume). This regime now favours the transport of sediment from the crest over the bank, towards its eastern flank. The pattern is in accordance with the observations made by DEGRENDELE *et al.* (this volume), where an overall lowering of the height of the bank (by ca. 0.5 m) has been identified, between 1992 and 1999.

CONCLUSIONS

On the basis of grain-size trend analysis, the residual transportation pattern reveals that, on the western steeper slope and within the central depression of the bank, the principal transport pathway of the non-biogenic sandy material is directed towards the northeast. Further, it can be assumed that the relatively coarse (>500 µm) and less well-sorted (>1.2) sediment, within these two sedimentary provinces, are associated with erosion (and/or transportation) during the flood phase of the tide. However, wave action should not be excluded from the analysis. Over the eastern gently sloping part of the bank, characterised by medium sized (250-500 µm) sediments, an overall southerly transport pathway is identified; this is induced, most probably, by the ebb currents; although these are weaker, they last longer and, as such, provides improved sorting (<1.0) of the sediments. In addition, the presence of the bedforms and the overall size of the bank appear to control the sediment transport pathways. Finally, the presence of the central depression appears to act as a 'by-passing' zone, rather than as a depo-centre for sediments.

ACKNOWLEDGEMENTS

This study has been undertaken in accordance with the research objectives of the project EUMARSAND ("European Marine Sand and Gravel Resources: Evaluation and Environmental Impact of Extraction", Contract No. HPRN-CT-2002-00222). The authors thank Sophie Le Bot and Wendy Bonne for organising and performing the sampling campaigns, with the assistance of Samuel Deleu, Els Verfaille, Andrew Symonds and Déborah Idier. The authors thank Michael Collins, Xaris Plomaritis and Erwan Garel for their help during the grain-size analyses, at the School of Ocean and Earth Science in the University of Southampton. Thanks are extended also to Vera Van Lancker and Valérie Bellec, for the information provided and their constructive comments.

LITERATURE CITED

- BELLECC, V.; VAN LANCKER V.; DEGRENDELE K.; ROCHE R.; SCHOTTE P., and LE BOT S., this volume. Geo-environmental characterisation of the Kwinte Bank. *Journal of Coastal Research*.
- BRITTON R.C. and BRITTON S.R., 1980. Sedimentary bed forms and linear banks. In: COLLINS, M.B.; BANNER, F.T.; TYLER, P.A.; WAKEFIELD, S.J., and JAMES, A.E. (eds.), *Industrialised Embayments and their Environmental Problems. A case study for Swansea Bay*. Pergamon Press, 177-191
- DEGRENDELE, K.; ROCHE, M.; SCHOTTE, P.; BELLEC, V., and VAN LANCKER, V., this volume. Morphological evolution of the Kwinte Bank central depression after its closure. *Journal of Coastal Research*.
- FOLK, P.L., 1974. *Petrology of Sedimentary Rocks*. Austin, Texas: Hemphill Publishing Company, 183 p.
- GAREL, E., this volume. Hydrodynamics and bedload transport, during a tidal cycle (derived from ADCP measurements), across the Kwinte Bank. *Journal of Coastal Research*.
- GAO, S. and COLLINS, M., 1991. A critique of the "McLaren Method" for defining sediment transport paths. *Journal of Sedimentary Petrology*, 61, 143-146.
- GAO, S. and COLLINS M., 1992. Net Sediment transport patterns inferred from grain-size trends, based upon definition of transport vectors. *Sedimentary Geology*, 81(1/2), 47-60
- GAO, S. and COLLINS, M., 1994a. Analysis of grain-size trends, for defining sediment transport pathways in marine environments. *Journal of Coastal Research*, 10(1), 75-78.
- GAO, S. and COLLINS, M., 1994b. Net sediment transport patterns inferred from grain-size trends, based upon definition of "transport Vectors" reply. *Sedimentary Geology*, 90, 171-185.
- GAO, S.; COLLINS M.; LANCKNEUS J.; DE MOOR G., and VAN LANCKER V., 1994. Grain-size trends associated with net sediment transport patterns: An example from the Belgian continental shelf. *Marine Geology*, 121, 171-185
- GAO, S., 1996. A fortran program for grain size trend analysis to define net sediment transport pathways. *Computers & Geosciences*, 22(4), 449-452.
- GAO, S. and COLLINS M., 2001. The use of grain-size trends in marine sediment dynamics: a review. *Chinese Journal of Oceanology and Limnology*, 19(3), 265-271.
- HOWARTH, M.J. and PROCTOR, R., 1992. Ship ADCP measurements and tidal models of the North Sea. *Continental Shelf Research*, 12, 601-623
- HOUTHUYS, R.; TRENTESAUX, A., and DE WOLF, P., 1994. Storm influences on a tidal sandbank's surface (Middelkerke Bank, southern North Sea). *Marine Geology*, 121, 23-41
- LANCKNEUS, J., 1989. A comparative study of some characteristics of superficial sediments on the Flemish Banks. Int. Coll. Quat. Tert. Geology Southern Bight, North Sea, May 1984. *Ministry of Economic Affairs-Belgian Geological Survey*, 29-241.
- LANCKNEUS, J.; DE MOOR, G.; DE SCHAEPEMEESTER, G.; MEYUS, I., and SPIERS, V., 1992. Residual sediment transport directions on a tidal sandbank. In: *Comparison of the "McLaren Model" with bedform analysis*. Bull. Belg. Ver. Aardr. Stud. (BEVAS) 2, pp. 425-446.
- LANCKNEUS, J.; DE MOOR, G.; VAN LANCKER, V., and DE SCHAEPEMEESTER, G., 1993. The use of the McLaren model for the determination of residual transport directions on the Gootebank, southern North Sea: *Progress in Belgian Oceanographic Research*. Institute of Marine Research and Air Sea Interaction (IRMA), Vol. 1, pp. 75-94.
- LANCKNEUS, J.; DE MOOR, G., and STOLK, A., 1994. Environmental setting, morphology and volumetric evolution of the Middelkerke Bank (southern North Sea). *Marine Geology*, 121(1-2), 1-21.

- LE ROUX, J.P., 1994. An alternative approach to the identification of net sediment transport paths based on grain-size trends. *Sedimentary Geology*, 94, 97-107.
- LIU, A.C.; MISSLAEN, T., and HENRIET, J.P., 1992. The morphology of the top-Tertiary erosion surface in the Belgian sector of the North Sea. *Marine Geology*, 105, 275-284.
- MCLAREN, P.A., 1981. Interpretation of trends in grain-size measurements. *Journal of Sedimentary Petrology*, 51, 611-624.
- MCLAREN, P.A. and BOWLES, D., 1985. The effects of sediment transport on grain-size distributions. *Journal of Sedimentary Petrology*, 55(4), 457-470.
- MCLAREN, P., 2001. Sediment Trend Analysis (Sta (R)). *Sea Technology*, 42(3): 10-14.
- MCLAREN, P. and BOWLES, D., 1991. A Critique of the McLaren Method for Defining Sediment Transport Paths - Reply. *Journal of Sedimentary Petrology*, 61(1), 147.
- MCLAREN, P.; COLLINS, M.B.; GAO, S., and POWYS, R.I.L., 1993. Sediment Dynamics of the Severn Estuary and Inner Bristol Channel. *Journal of the Geological Society*, 150, 589-603.
- MCLAREN, P.; CRETNEY, W.J., and POWYS, R.I., 1993. Sediment Pathways in a British-Columbia Fjord and Their Relationship with Particle-Associated Contaminants. *Journal of Coastal Research*, 9(4), 1026-1043.
- PETTLJOHN, F.G.; POTTER P.D., and SIEVER, R., 1972. *Sand and Sandstone*. New York: Springer, 618 p.
- RIVIERE, A., 1977. Methodes Granulometriques; Techniques et Interpretations. In: MASSON, N. Paris (1977), 170p.
- SOULSBY, R., 1997. *Dynamics of marine sands: a manual for practical applications*. London: Thomas Telford, 249 p.
- VAN DEN EYNDE, D.; GIARDINO, A.; PORTILLA, J.; FETTWEIS, M.; FRANCKEN, F., and MONBALIU, J., this volume. Modelling the effects of sand extraction on the sediment transport due to tides on the Kwinte Bank. *Journal of Coastal Research*,
- VANWESENBEECK, V. and LANCKNEUS, J., 2000. Sediment transport paths on a tidal sand bank: a comparison between the modified McLaren model and bedform analysis. *Journal of Sedimentary Research*, 70(3), 470-477.