Economic and environmental comparison of CO₂ storage and enhanced oil recovery project configurations in the North Sea

Kris WELKENHUYSEN^{1,2}, Tine COMPERNOLLE^{1,3}, Bruno MEYVIS¹, Michele MORETTI^{4,5}, Kris PIESSENS¹, Pieter ROEFS³ & Rudy SWENNEN²

- 1 Geological Survey of Belgium Royal Belgian Institute of Natural Sciences, Jennerstraat 13 – 1000 Brussels – Belgium
- 2 Department of Earth and Environmental Sciences, KU Leuven, Celestijnenlaan 200E, 3001 Heverlee, Belgium
- 3 Departement of Economics University of Antwerp, Prinsstraat 13- 2000 Antwerp Belgium
- 4 Centre of Environmental Sciences, Hasselt University, Agoralaan Building D 3590 Diepenbeek Belgium
- 5 University of Liege, Gembloux Agro-Bio Tech, Economy and Rural Development Unit, Passage des Déportés 2, 5030, Gembloux, Belgium

1. Introduction

The EU has set ambitious goals on the reduction of CO₂ emissions into the atmosphere for limiting the effects of global warming. And while renewable alternatives are available in some cases, long-term storage of large quantities of produced CO₂ seems inevitable. Because the process of capturing, transporting and injecting CO₂ into a reservoir (CO₂ capture and storage, CCS) is costly and current revenues from the EU emission trading system (ETS) are insufficient to cover the expenses, the commercial deployment of CCS is delayed in Europe. A potential business case for CO₂ geological storage (CGS) is CO₂-enhanced oil recovery (CO₂-EOR), where CO₂ is used to drive out 5-15% additional oil after the application of primary and secondary recovery techniques. Within Europe, the North Sea is the main oil province with a high potential for CO₂-EOR. Earlier studies have concluded that off-shore CO₂-EOR projects are a viable business case, but no investments have been made yet. Moreover, adversaries of this technology often point out that CO₂-EOR is not a climate-friendly solution because its goal is to increase and lock-in fossil fuel production.

2. Economic and environmental analysis

To investigate the potential of CO₂-EOR, an integrated geological, techno-economic and environmental analysis is made of a potential candidate for EOR in the North Sea: the Buzzard oil field (Roefs et al., in press). A techno-economic spreadsheet calculation is made for different injection scenarios. The net present value (NPV) is calculated as the discounted cash flows over time. A full-sized coal-fired power plant is assumed, producing about 4 MtCO₂/y, of which the Buzzard field can accept 2.9 Mt/y for EOR. A second injection location in an aquifer is also assumed. The market scenario is chosen at an oil price of 50 €/bbl, and an ETS price at 5 €/t. In parallel, a life cycle assessment (LCA) is conducted to compare the environmental impact, considering emissions from the additional construction and operation of the capture plant and EOR operation.. Results are expressed as the global warming potential (GWP). Four scenarios are considered: CO₂ capture and storage in an offshore aquifer; CO₂-EOR in the Buzzard field followed by emission into the atmosphere; CO₂-EOR and parallel aquifer storage; and CO₂-EOR and parallel aquifer storage, with a continuation of storage in the Buzzard field after the cease of oil production. For the first time such an integrated economic and environmental analysis is made comparing CGS and EOR.

Results show that the scenario with only CGS has the lowest GWP (reference level for the other scenarios), but the NPV is negative (-800 M \in) and thus does not provide a viable investment option. The scenario with only EOR has the highest NPV (>500 M \in), but also has the highest GWP, 38% higher than the storage-only scenario. The results for the third and fourth scenario are very similar, with a GWP of 11% more than the storage-only scenario,

and an NPV of 207 and 220 M€ respectively. This shows that CO₂-EOR can be a viable investment that, when combined with CO₂ storage, only has a minor additional environmental impact over a storage-only project. EOR can thus also serve as an enabler for CGS, with a widespread storage deployment when the necessary infrastructure is in place. It is also beneficial to use the depleted oil field for storage (fourth scenario) over aquifer storage (third scenario), because the necessary infrastructure is already present. From a sustainability perspective this also makes sense, as it allows for a more efficient use of geological resources.

3. Geo-economic simulation

The analysis shows that even at low oil and CO₂ prices, EOR projects can be viable. Since no projects are (soon becoming) operational, other factors are influencing the economic viability too. A more advanced geo-economic analysis is therefore performed with the PSS simulator from the point of view of an investor for the Buzzard field. In a more realistic approach, investment decisions are simulated, considering limited foresight generated by market and reservoir uncertainty. Results show that an increased hurdle rate results in a lower chance of a negative project value (Fig. 1, Welkenhuysen et al., subm.). A hurdle rate of 12% removes all project risk, but also eliminates potentially viable projects. At an oil price of 50 €/bbl, the threshold for EOR investment occurs at 0 €/tCO₂ (green dotted line; excluding capture cost). The discrepancy with the cost for capture is too much to be covered by the current CO₂ market price of around 15 €/t (June 2018). CO₂-EOR with or without CGS in the North Sea therefore does not come forward as commercially viable from this study, where, in comparison to state-of-the-art assessments, more realistic economic and geological uncertainties are used. It does, however, have strategic and environmental benefits compared to a situation where oil is imported into the EU. In that context, incentives to reduce the cost and/or risk could be justified. Future research will focus on the establishment of contractual agreements between the parties, including uncertainty in the environmental analysis, and the scarcity cost of storage capacity as a limited commodity will be taken into account.

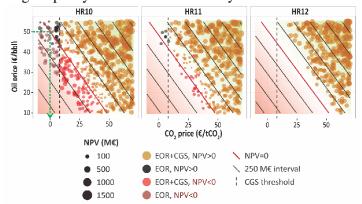


Figure 1. Results of the PSS IV simulation of the Buzzard field for different hurdle rates (HR10, HR11 and HR12). Negative project values are shown in red/brown. To the right of the dotted vertical threshold line are projects with CGS after the EOR phase.

References

Roefs, P., Moretti, M., Welkenhuysen, K., Piessens, K. & Compernolle, T., in press. CO₂-enhanced oil recovery and CO₂ capture and storage: an environmental economic trade-off analysis. 13th Conference on Sustainable Development of Energy, Water and Environment Systems (SDEWES), Palermo, 2018.

Welkenhuysen, K., Meyvis, B., Swennen, R., & Piessens, K., subm. Economic threshold of CO₂-EOR and CO₂ storage in the North Sea: a case study of the Claymore, Scott and Buzzard oil fields. International Journal of greenhouse Gas Control.