

REPORT

**Vlaamse Overheid - Departement
Mobiliteit en Openbare Werken**

Afdeling Maritieme Toegang

Evaluation of the external effects on the siltation in Deurganckdok

Report 2.2: Through tide Sediview measurements
during neap tide: Entrance Deurganckdok -
Autumn 2011

15 October 12 - version 2.0



International Marine & Dredging Consultants

Colophon

International Marine & Dredging Consultants

Address: Coveliersstraat 15, 2600 Antwerp, Belgium

: + 32 3 270 92 95

: + 32 3 235 67 11

Email: info@imdc.be

Website: www.imdc.be

Document Identification

Title	Report 2.2: Through tide Sediview measurements during neap tide: Entrance Deurganckdok - Autumn 2011
Project	Evaluation of the external effects on the siltation in Deurganckdok
Client	Vlaamse Overheid - Departement Mobiliteit en Openbare Werken - Afdeling Maritieme Toegang
Tender	16EF/2009/14
Documentref	I/RA/11354/10.107/MBO/ANF
Documentname	K:\PROJECTS\11\11354 - Evaluatie externe effecten aanslibbing DGD\10-Rap\2.2_RA10107_neap tide_5000\2_2_RA10107_neaptide_06102011_v2.0.docx

Revision

Version	Date	Description	Author	Checked	Approved
1.0	03/02/12	Draft	YDK	JCA	MSA
2.0	15/10/12	Final report	YDK	JCA	MSA

Distribution List

3	Hard copy	Joris Vanlede	Departement Mobiliteit en Openbare werken
3	Hard copy	Frederik Roose	Afdeling Maritieme Toegang

Table of Contents

0. SUMMARY	1
1. INTRODUCTION	2
1.1 THE ASSIGNMENT	2
1.2 AIM OF THE STUDY	2
1.3 OVERVIEW OF THE STUDY	2
2. THE MEASUREMENT CAMPAIGN	5
2.1 OVERVIEW OF THE PARAMETERS	5
2.2 DESCRIPTION OF THE MEASUREMENT CAMPAIGN	8
2.2.1 <i>Purpose of the measurement campaign</i>	8
2.2.2 <i>Measurement procedure</i>	8
2.3 THE EQUIPMENT	9
2.3.1 <i>ADCP</i>	9
2.3.2 <i>CTD-OBS3A</i>	9
2.3.3 <i>Pump sampler</i>	10
3. DESCRIPTION OF THE MEASUREMENTS	11
3.1 MEASUREMENT PERIODS	11
3.2 HYDRO-METEOROLOGICAL CONDITIONS DURING THE MEASUREMENT CAMPAIGN	11
3.2.1 <i>Vertical tide during the measurements</i>	11
3.2.2 <i>Meteorological data</i>	12
3.3 NAVIGATION INFORMATION	12
3.4 REMARKS ON DATA	12
4. PROCESSING OF DATASETS	13
4.1 CALIBRATION OF THE OBS TURBIDITY SENSOR	13
4.2 METHODOLOGY OF PROCESSING OF THE ADCP DATA WITH SEDIVIEW	13
4.2.1 <i>Acoustic backscatter theory</i>	13
4.2.2 <i>Water sampling and transect sailing</i>	14
4.2.3 <i>Calibration for suspended sediment concentration within Sediview</i>	14
4.2.4 <i>Sediview configuration</i>	14
4.2.5 <i>Output</i>	17
5. PRELIMINARY ANALYSIS OF THE DATA	18
5.1 OCTOBER 6 ST 2011 SURVEY	18
5.2 INTERCOMPARISON WITH EARLIER SURVEYS AT DGD	20
5.2.1 <i>Fresh water discharge</i>	21
5.2.2 <i>Sediment distributions and current pattern around HW</i>	22
5.2.3 <i>Water balance</i>	28
5.2.4 <i>Sediment balance</i>	36

6. REFERENCES 43

Annexes

ANNEX A	OVERVIEW OF MEASUREMENT	52
A.1	OVERVIEW OF THE MEASUREMENT LOCATIONS FOR THE WHOLE HCBS2 AND DEURGANCKDOK MEASUREMENT CAMPAIGNS	53
A.2	OVERVIEW OF ALL MEASUREMENT LOCATIONS HCBS AND DEURGANCKDOK MEASUREMENT CAMPAIGNS	57
A.3	MEASUREMENT OVERVIEW AT DGD ON 06/10/2011.....	58
ANNEX B	TIDAL AND DISCHARGE DATA	60
B.1	TIDAL DATA.....	61
B.2	DISCHARGE DATA	62
ANNEX C	NAVIGATION INFORMATION AS RECORDED ON SITE	64
ANNEX D	UNESCO PPS-78 FORMULA FOR CALCULATING SALINITY	66
ANNEX E	OVERVIEW OF SEDIVIEW SETTINGS	68
ANNEX F	CONTOURPLOTS OF FLOW VELOCITIES, SEDIMENT CONCENTRATION AND SEDIMENT FLUX, PER SAILED TRANSECT	72
ANNEX G	DISCHARGE, SEDIMENT FLUX AND AVERAGE SEDIMENT CONCENTRATION FOR THE TOTAL CROSS-SECTION.....	188
G.1	DISCHARGE DISTRIBUTION OVER THE CROSS SECTION: POSITIVE IS FROM DOCK TO RIVER....	189
G.2	SEDIMENT FLUX DISTRIBUTION OVER THE CROSS SECTION: POSITIVE IS FROM DOCK TO RIVER	193
G.3	SEDIMENT CONCENTRATION DISTRIBUTION OVER THE CROSS SECTION.....	195
ANNEX H	TEMPORAL VARIATION OF TOTAL FLUX, TOTAL DISCHARGE AND SUSPENDED SEDIMENT CONCENTRATION.....	198
ANNEX I	CURRENT AND SSC PATTERNS - INTERCOMPARISON WITH EARLIER MEASUREMENT CAMPAIGNS AT DEURGANCKDOK.....	202
I.1	OVERVIEW OF THE DIFFERENT CAMPAIGNS	203
I.2	1 HOUR AFTER HW (DENSITY CURRENTS).....	204
I.3	3 HOURS AFTER HW (DENSITY CURRENTS).....	213
ANNEX J	OVERVIEW OF HCBS2 AND AANSLIBBING DEURGANCKDOK	223
REPORTS		

List of Tables

TABLE 1-1: OVERVIEW OF THE EXTERNAL EFFECTS DEURGANCKDOK REPORTS	3
TABLE 2-1: TRANSECT OF THE FLOW MEASUREMENTS ON 6 TH OF OCTOBER 2011 (UTM31 ED50)	9
TABLE 2-2: MAIN CONFIGURATION SETTINGS OF ADCP	9
TABLE 3-1: HIGH AND LOW TIDE AT LIEFKENSHOEK ON 06/10/2011.....	11

TABLE 3-2: COMPARISON OF THE TIDAL CHARACTERISTICS OF 06/10/2011 WITH THE AVERAGE TIDE, THE AVERAGE NEAP TIDE AND THE AVERAGE SPRING TIDE OVER THE DECADE 1991-2000 FOR LIEFKENSHOEK.	12
TABLE 4-1: EXTRAPOLATION METHODS FOR TOP AND BOTTOM VARIABLES	16
TABLE 5-1 AVERAGE SSC'S OVER THE SAILED TRANSECT.....	18
TABLE 5-2: HYDROLOGICAL CONDITIONS DURING THROUGH TIDE ADCP MEASUREMENTS AT THE ENTRANCE OF DGD	20
TABLE 5-3 TOTAL WATER EXCHANGE COMPARED TO TIDAL FILLING WATER EXCHANGE AT TRANSECT DGD DURING EBB, FLOOD AND THE COMPLETE MEASUREMENT DAY	28
TABLE 5-4 TOTAL RESIDUAL, INCOMING AND OUTGOING WATER VOLUMES IN DEURGANCKDOK DURING THE MEASUREMENT CAMPAIGN OF 06/10/2011 COMPARED TO TIDAL FILLING/EMPTYING VOLUMES.....	31
TABLE 5-5 THE DIFFERENCE BETWEEN MEASURED DATA AND INTEGRATED TIDE DATA DURING THE MEASUREMENT CAMPAIGN OF 06/10/2011.....	31
TABLE 5-6: WATER VOLUMES DURING EBB, FLOOD AND TOTAL MEASUREMENT CAMPAIGN, INCLUDING THEORETICAL EXPECTED VOLUMES.	33
TABLE 5-7 RANGE OF SEDIMENT DEPOSITION DURING EBB, FLOOD AND MEASUREMENT CAMPAIGN, CALCULATED WITH FORCED FITTING WATER BALANCES FOR THOSE DAYS. THE DURATION IS BASED ON ADCP MEASUREMENTS.	39

List of figures

FIGURE 2-1: ELEMENTS OF THE SEDIMENT BALANCE.....	5
FIGURE 2-2: DETERMINING A SEDIMENT BALANCE.....	6
FIGURE 2-3: TRANSPORT MECHANISMS.....	7
FIGURE 2-4: MAP OF SAILED TRANSECT DGD PERPENDICULAR TO DEURGANCKDOK (DGD) ON 6 TH OF OCTOBER 2011 (ED50).....	8
FIGURE 4-1: UNMEASURED REGIONS IN THE CROSS SECTION (FROM RD INSTRUMENTS, 2003)	15
FIGURE 4-2: MEASURED AND ESTIMATED DISCHARGES AND SEDIMENT FLUXES WITHIN SEDIVIEW (DRL, 2005)	15
FIGURE 4-3: PRINCIPAL OF BOTTOM ESTIMATE OF THE SEDIMENT CONCENTRATION IN SEDIVIEW.....	16
FIGURE 5-1 TOTAL IN/OUT/NET FLUX, TOTAL INCOMING/OUTGOING SSC, AVERAGE IN/OUT/NET DISCHARGE AND WATER LEVEL AT DGD ON OCTOBER 6 TH 2011.....	19
FIGURE 5-2: DAILY FRESH WATER DISCHARGE EVOLUTION AT SCHELLE BEFORE AND AFTER A MEASUREMENT DAY.	21
FIGURE 5-3: PERPENDICULAR CURRENT VELOCITY AT 3HRS BEFORE HIGH WATER AT DIFFERENT NEAP TIDES	23
FIGURE 5-4: SUSPENDED SEDIMENT CONCENTRATION AT 3HRS BEFORE HIGH WATER AT DIFFERENT NEAP TIDES	25
FIGURE 5-5: PERPENDICULAR CURRENT VELOCITY AT 1HR BEFORE HIGH WATER AT DIFFERENT NEAP TIDES	26
FIGURE 5-6: SUSPENDED SEDIMENT CONCENTRATION AT 1HR BEFORE HIGH WATER AT DIFFERENT NEAP TIDES	28
FIGURE 5-7: THE WATER DISCHARGE AT THE ENTRANCE OF DEURGANCKDOK OVER A TIDAL CURVE ON 06/10/2011. TOP: TOTAL INCOMING (Q _{IN}) AND OUTGOING (Q _{OUT}) DISCHARGE	

INCLUDING THE TOTAL WATER EN TIDAL EXCHANGE; CENTRAL: MEASURED RESIDUAL DISCHARGE (Q_{TOT}) VERSUS THEORETICAL RESIDUAL DISCHARGE (Q_{VOLBAL}) AND CORRECTION OFFSET (Q_{ERROR}) INCLUDING RELATIVE ERROR; BELOW: TIDAL CURVE	30
FIGURE 5-8: THE SEDIMENT FLUX AT THE ENTRANCE OF DEURGANCKDOK ON 06/10/2011 (NEGATIVE VALUES REPRESENT INCOMING SEDIMENT). TOP: TOTAL INCOMING (FLUX IN) AND OUTGOING SEDIMENT FLUX (FLUX OUT); CENTRAL: TOTAL SEDIMENT EXCHANGE VERSUS TOTAL SEDIMENT FLUX; BELOW: TIDAL CURVE	36
FIGURE 5-9 OVERVIEW OF MEASURED SEDIMENT DEPOSITION IN DEURGANCKDOCK PER TIDE BY MEANS OF SEDIVIEW TECHNIQUE	37

List of annex figures

ANNEX FIGURE 1: OVERVIEW OF THE MEASUREMENT LOCATIONS	53
ANNEX FIGURE 2: OVERVIEW OF THE MEASUREMENT LOCATIONS AT DEURGANCKDOK DURING PREVIOUS CAMPAIGNS.....	54
ANNEX FIGURE 3: TRANSECT S IN SCHELLE.....	55
ANNEX FIGURE 4: TRANSECT W IN WAARDE	56
ANNEX FIGURE 5: MEASURED TIDE IN MET ON 6 OCTOBER 2011 AT LIEFKENSHOEK	61
ANNEX FIGURE 6: PENTADE AVERAGE DISCHARGES OF THE RIVER SCHELDT IN SCHELLE OF THE MONTHS SEPTEMBER AND OCTOBER 2011	62
ANNEX FIGURE 7: MEAN FRESH WATER DISCHARGE OVER A PERIOD OF 30 YEAR (1971-2000) WITH THE MONTHLY DISCHARGE OF 2008-2009.....	63
ANNEX FIGURE 8: TOTAL DISCHARGE THROUGH THE MEASURED CROSS SECTION, POSITIVE IS FROM DOCK TO RIVER	199
ANNEX FIGURE 9: TOTAL FLUX THROUGH THE MEASURED CROSS SECTION, POSITIVE IS FROM DOCK TO RIVER.....	200
ANNEX FIGURE 10: SUSPENDED SEDIMENT CONCENTRATION THROUGH THE MEASURED CROSS SECTION.....	201
ANNEX FIGURE 11: PERPENDICULAR CURRENT VELOCITY AT 3H AFTER HIGH WATER	217

0. SUMMARY

This report presents the factual data of a through tide measurement to determine the sediment influx in dock Deurganckdok during a complete tidal cycle with neap tide conditions. The flux is measured by an Acoustic Doppler Current Profiler (ADCP) where the backscatter intensity is calibrated to suspended sediment concentration (SSC). The SSC calibration was done in the Sediview software by using water samples which were taken during the measurement campaign.

The measurements took place on 6th of October 2011 after completing a current deflecting wall (CDW) in August 2011 near the northern entrance of Deurganckdok. This report will help us to evaluate the effect of a current deflecting wall on the sediment influx in the dock and to gain insight in these siltation mechanisms.

1. INTRODUCTION

1.1 THE ASSIGNMENT

This report is part of a set of reports concerning the project 'Evaluation of the external effects on the siltation in Deurganckdok'. The terms of reference were prepared by 'Departement Mobiliteit en Openbare Werken van de Vlaamse Overheid, Afdeling Maritieme Toegang (16EF/2009/14)'. The study was awarded to International Marine and Dredging Consultants NV in association with Deltares and Gems International on 8 December 2009.

This study is a follow-up study on the study 'Opvolging aanslibbing Deurganckdok' that ran from January 2006 till March 2009.

Waterbouwkundig Laboratorium– Cel Hydrometrie Schelde provided data on discharge, tide, salinity and turbidity along the river Scheldt and provided survey vessels for the long term and through tide measurements. Afdeling Maritieme Toegang provided maintenance dredging data. Agentschap voor Maritieme Dienstverlening en Kust – Afdeling Kust provided depth sounding measurements.

1.2 AIM OF THE STUDY

The purpose of this study entails evaluating the external effects on the siltation in the Deurganckdok. External effects are those effects caused by recent or near-future human operations near Deurganckdok:

- The construction of the Current Deflecting Wall downstream of the entrance of the Deurganckdok.
- The deepening and widening of the navigational channel in the Lower Sea Scheldt between the entrance of the Deurganckdok and the access channels to the locks of Zandvliet-Berendrecht.
- The deepening of the entrance to the Deurganckdok by removing the sill at the entrance.

1.3 OVERVIEW OF THE STUDY

This study constitutes of 3 parts:

- Reporting and analysis of existing documents and measurement data
- Execution of specific measurement campaigns to map the siltation and its environmental factors.
- Support in numerical modelling efforts

Reports of the project 'Evaluation of the external effects on the siltation in the Deurganckdok' are summarized in Table 1-1. This report 2.2, is one of a set of reports that gains insight in

sediment and water transport between Deurganckdok and the river Scheldt, which belongs to the second part of this project.

Table 1-1: Overview of the External Effects Deurganckdok Reports

Report	Description
I.	Reporting
I.1	Annual Sediment Balance: Bathymetry surveys, Density measurements, Maintenance and construction dredging activities
1.1	Annual Sediment Balance: year 1: 1/4/2009-31/3/2010 (I/RA/11354/10.067/NZI)
1.2	Annual Sediment Balance: year 2: 1/4/2010-31/3/2011 (I/RA/11354/10.100/MBO/ANF)
1.3	Annual Sediment Balance: year 3: 1/4/2011-31/3/2012 (I/RA/11354/10.101/MBO/ANF)
I.2	Boundary Conditions: Upriver Discharge, Salt concentration Scheldt, Bathymetric evolution in access channels, dredging activities in Lower Sea Scheldt and access channels
1.4	Boundary Conditions year 1: 01/04/2009 – 31/3/2010 (I/RA/11354/10.102/MBO/ANF)
1.5	Boundary Conditions year 2: 01/04/2010 – 31/3/2011 (I/RA/11354/10.103/MBO/ANF)
1.6	Boundary Conditions year 3: 01/04/2011 – 31/3/2012 (I/RA/11354/10.104/MBO/ANF)
I.3	Synthesis of CDW research
1.7	Synthesis report of research on Current Deflecting Wall (I/RA/11354/10.063/MBO)
I.4	Analysis: evaluation of external effects on siltation in Deurganckdok
1.8	Analysis of external effects on siltation processes and factors (I/RA/11354/10.105/MBO/ANF)
II.	Measurement campaigns: Factors contributing to salt and sediment distribution in Deurganckdok: Salt-Silt (OBS3A) & Frame measurements, Through tide measurements (SiltProfiling & ADCP) & Calibrations
II.1	Through tide measurements fixed transects
2.1	Through tide Sediview measurement: Entrance DGD during spring tide Autumn 2011 (I/RA/11354/10.106/MBO/ANF)
2.2	Through tide Sediview measurement: Entrance DGD during neap tide Autumn 2011 (I/RA/11354/10.107/MBO/ANF)
2.3	Through tide Sediview measurement: Entrance DGD during spring tide Spring 2012 (I/RA/11354/10.108/MBO/ANF)
2.4	Through tide Sediview measurement: Entrance DGD during neap tide Spring 2012 (I/RA/11354/10.109/MBO/ANF)
II.2	Through tide measurements eddy currents
2.5 ²	Through tide measurements: Eddy Currents DGD 02/03/2010 (I/RA/11283/10.051/MSA)
2.6	Through tide measurements: Eddy Currents DGD Autumn I/RA/11354/10.110/MBO/ANF)
2.7	Through tide measurements: Eddy Currents DGD Spring 2012 (I/RA/11354/10.111/MBO/ANF)
II.3	Salt Silt Distribution entrance Deurganckdok
2.8 ³	Salt-Silt distribution Deurganckdok 1/4/2009-31/3/2010 (I/RA/11354/10.068/NZI)
2.9	Sal-Silt distribution Deurganckdok 1/6/2011-31/03/2012 (I/RA/11354/10.112/MBO/ANF)

Report Description	
II.4 Current Salt Silt Distribution CDW Deurganckdok	
2.10	Salt Silt & Current Distribution entrance Deurganckdok: frame measurements and through tide measurements: Autumn 2011 (I/RA/11354/11.131/BQU)
2.11	Salt Silt & Current Distribution entrance Deurganckdok: frame measurements and through tide measurements: Spring 2012 (I/RA/11354/10.114/MBO/ANF)
II.5 Quality Control instruments	
2.12	Calibration stationary & mobile equipment 16/03/2011 (I/RA/11354/10.113/MBO/ANF)
2.13	Calibration stationary equipment 2012 (I/RA/11354/12.011/JCA)

²: this report is part of the project Siltation Deurganckdok (11283)

³: this report contains report 2.35 of project Siltation Deurganckdok (I/RA/11283/09.085/MSA)

2. THE MEASUREMENT CAMPAIGN

2.1 OVERVIEW OF THE PARAMETERS

The first part of the study aims at determining a sediment balance of Deurganckdok and the net influx of sediment. The sediment balance comprises a number of sediment transport modes: deposition, influx from capital dredging works, internal replacement and removal of sediments due to maintenance dredging (Figure 2-1).

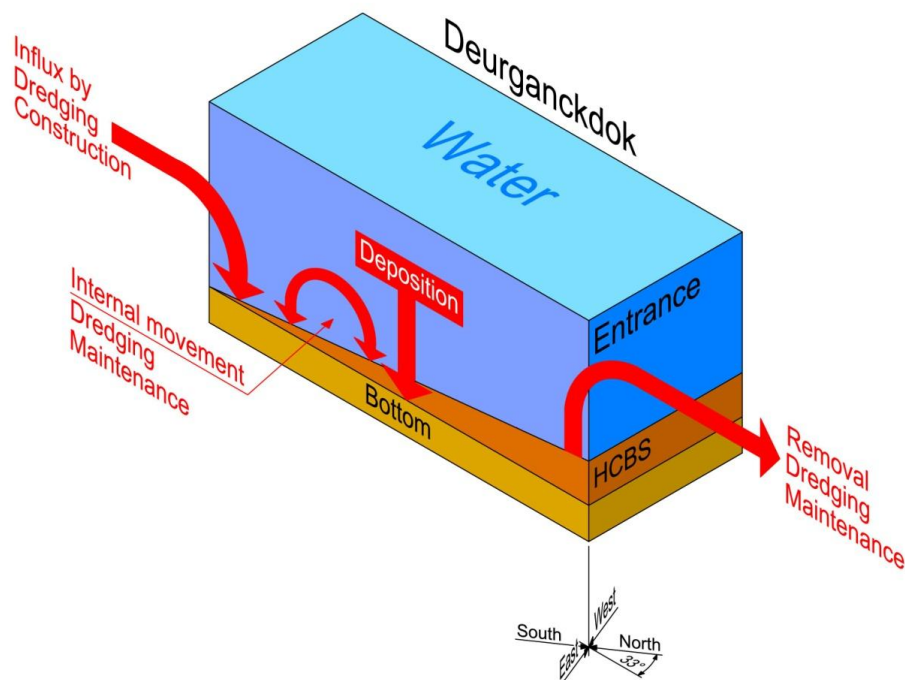


Figure 2-1: Elements of the sediment balance

A net deposition can be calculated from a comparison with a chosen initial condition t_0 (Figure 2-2). The mass of deposited sediment is determined from the integration of bed density profiles recorded at grid points covering the dock. Subtracting bed sediment mass at t_0 leads to the change in mass of sediments present in the dock (mass growth). Adding cumulated dry matter mass of dredged material removed since t_0 and subtracting any sediment influx due to capital dredging works leads to the total cumulated mass entered from the Scheldt river since t_0 .

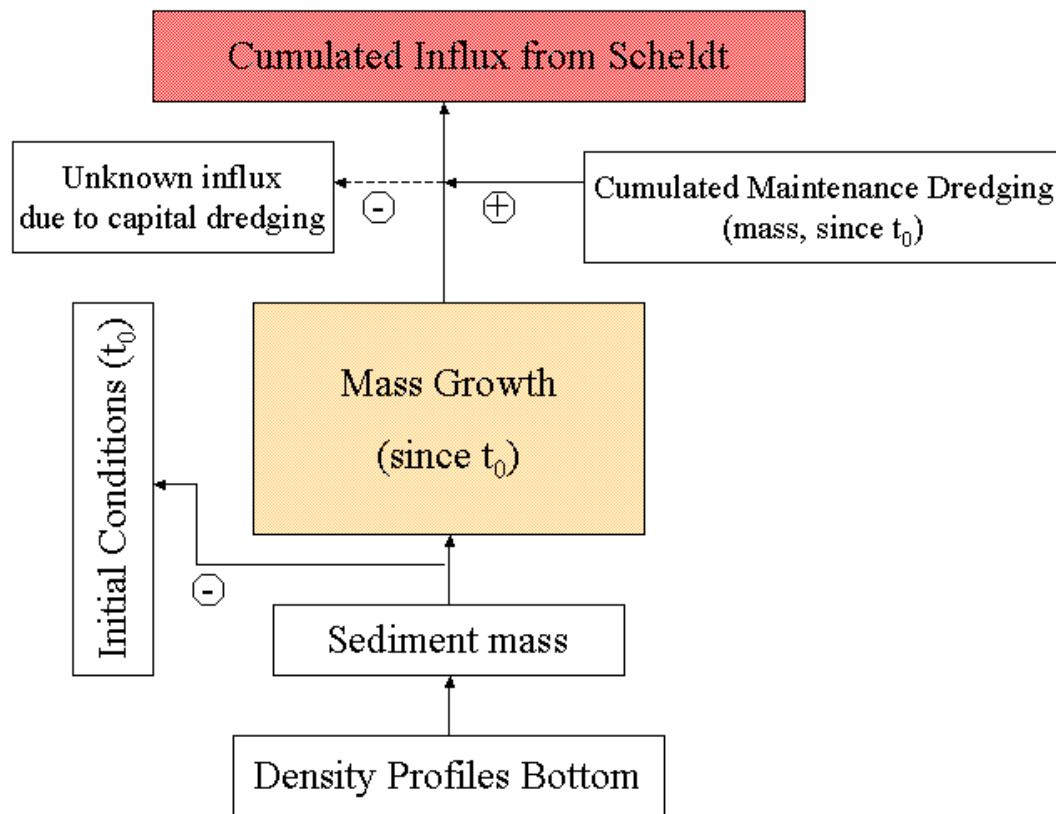


Figure 2-2: Determining a sediment balance

The main purpose of the second part of the study is to gain insight in the mechanisms causing siltation in Deurganckdok. The following mechanisms will be aimed at in this part of the study:

- Tidal prism, i.e. the extra volume in a water body due to high tide
- Vortex patterns due to passing tidal current
- Density currents due to salt gradient between the Scheldt river and the dock
- Density currents due to highly concentrated benthic suspensions

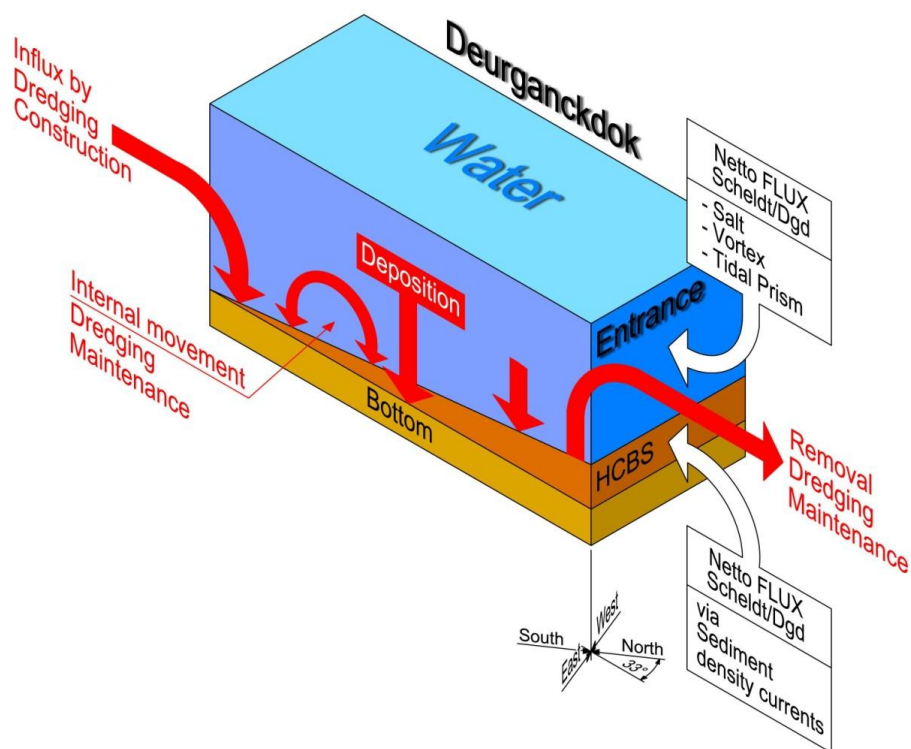


Figure 2-3: Transport mechanisms

These aspects of hydrodynamics and sediment transport have been landmark in determining the parameters to be measured during the project. Measurements will be focussed on three types of timescales: one tidal cycle, one neap-spring cycle and seasonal variation within one year.

Following data are being collected to understand these mechanisms:

- Monitoring the freshwater input (discharge) from the tributaries into the river Scheldt.
- Monitoring salinity and sediment concentration in the Lower Sea Scheldt at permanent measurement locations at Oosterweel, up- and downstream of the Deurganckdok.
- Long term measurement of salinity and suspended sediment distribution in Deurganckdok.
- Monitoring near-bed processes (current velocity, turbidity, and bed elevation variations) in the central trench in the dock, near the entrance as well as near the current deflecting wall location.
- Dynamic measurements of flow pattern, salinity and sediment transport at the entrance of Deurganckdok.
- Through tide measurements of vertical sediment concentration profiles -including near bed high concentrated benthic suspensions.
- Monitoring dredging activities at the entrance channels towards the Kallo, Zandvliet and Berendrecht locks as well as dredging and dumping activities in the Lower Sea Scheldt and Deurganckdok in particular.

In situ calibrations were conducted on several dates to calibrate all turbidity and conductivity sensors.

2.2 DESCRIPTION OF THE MEASUREMENT CAMPAIGN

2.2.1 Purpose of the measurement campaign

The purpose of the measurements was to determine the cross-section distribution of the suspended sediment concentration, the sediment flux and flow velocity during a complete tidal cycle.

Measurements were undertaken on the DGD transect (Figure 2-4), being the cross section between the river Scheldt and the dock itself.

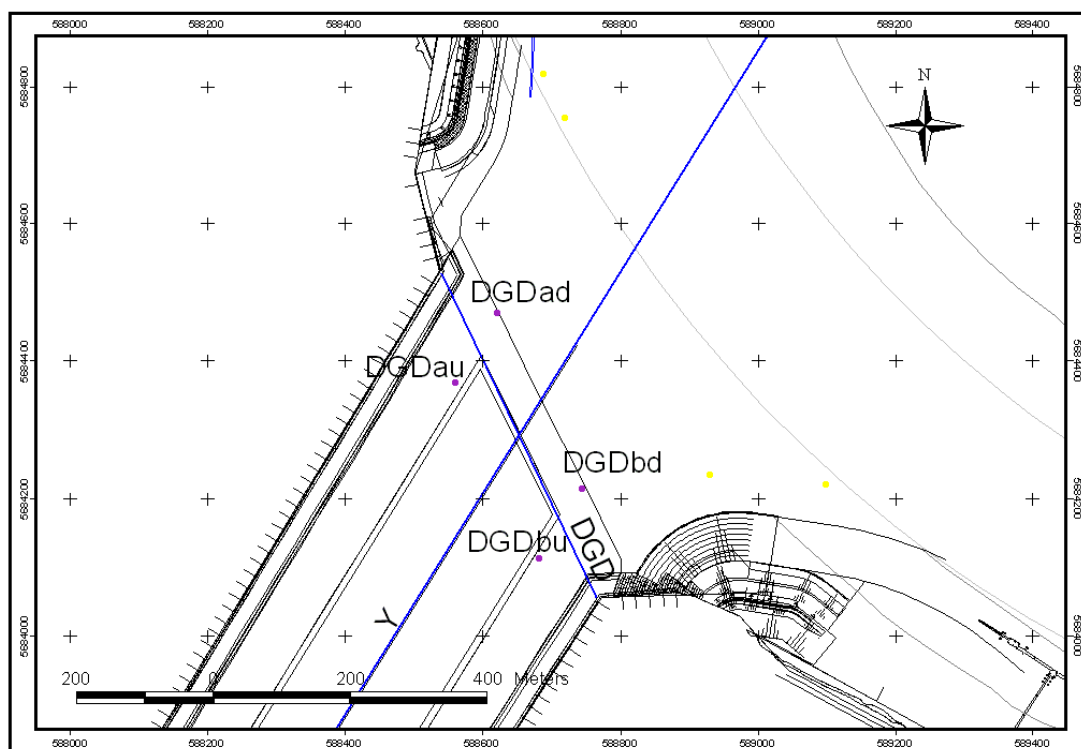


Figure 2-4: Map of sailed transect DGD perpendicular to Deurganckdok (DGD) on 6th of October 2011 (ED50).

2.2.2 Measurement procedure

Flow velocity, Turbidity, Salinity and Temperature measurements were conducted on the 6th of October 2011 from 7h23 MET until 20h00 MET. This transect was sailed throughout 12.5 hours to cover a complete tidal cycle. The vessel with a mounted ADCP sailed a fixed transect from the right bank to the left bank and vice versa as a backup transect (Table 2-1). Profiles were gathered to calibrate the ADCP transects for temperature, salinity and suspended sediment concentration to be used in Sediview. The profiles were taken close to the locations of the Long Term frames, situated north and south of the DGD-entrance (see IMDC, 2012d).

During these calibrations, a fish with a CTD-OBS was lowered to the bottom. The downcast was interrupted at two depths, one in the upper half of the water column (around 4 meters from the water surface) and one at 4 meters above the bottom and the last one at the water bottom (about 10 meters above water surface). At the two first depths samples were taken for calibration, and are used as 'ground truth' for all suspended sediment concentration measurements (OBS and Sediview). The other instruments logged continuously during the downcast. Conductivity, temperature and depth was logged by the CTD-probe, while turbidity was recorded by the OBS.

Table 2-1: Transect of the Flow Measurements on 6th of October 2011 (UTM31 ED50)

Measurement location	Left Bank Easting	Left Bank Northing	Right Bank Easting	Right Bank Northing	Length [m]	Course [degr.]
Transect DGD	588 541	5 684 527	588 765	5 684 056	522	336

2.3 THE EQUIPMENT

2.3.1 ADCP

The current measurements were conducted using a Teledyne RD Instruments ADCP 600 kHz Workhorse with beam angle 20°. For positioning the GPS onboard the vessel Parel II was used. For the measurement of the heading a gyrocompass was installed.

This 600 KHz ADCP system was mounted on a steel pole at the port side of the vessel. The transducer set was looking vertically downwards to the bottom. Transceiver unit and computer system were connected to peripherals such as the differential GPS-receiver, ADCP and the gyrocompass.

During the measurements the ADCP acquisition software of Winriver was used. The main settings are given in Table 2-2.

Table 2-2: Main Configuration Settings of ADCP

Main configuration settings of ADCP 600kHz Workhorse:
Cell depth: 0.5 m
Number of cells: 50
Number of Water pings per ensemble: 2
Number of Bottom Track pings per ensemble: 2
Time between ensembles: 0
Averaging: None
Speed of Sound: Fixed 1500 m/s
Salinity 0 psu
3-beam solution: enabled
Beam angle: 20°

2.3.2 CTD-OBS3A

A CTD Diver together with an OBS3A were used at two instances to measure the conductivity, turbidity and temperature profiles (together with the absolute pressure).

A D&A type OBS 3A was used to measure absolute pressure (m), temperature (°C) and turbidity (NTU) while the conductivity (mS/cm) was extracted from the CTD-diver.

On starboard side of Parel II, the OBS 3A device and CTD-Diver were mounted on a tow fish together with a water hose. The resulting record is filled-up with GPS-time, sample number, and planimetric position of the GPS-receiver. Sampling frequency is 1 reading per second.

The technical details on the OBS 3A and CTD-diver are given in the winter calibration Report of the HCBS 1 measurement campaign. (IMDC, 2006a)

2.3.3 Pump sampler

A water sampler was attached nearby the turbidity sensor taking water samples. Samples were collected in 1 liter sampling bottles. The pumping speed of the water sampler was tested at the start of the measurement campaign on board. Dye was used to time the duration between the intake of the dye and exit at the sampling end of the sampler on board. The duration between intake and exit at the end was 17 seconds.

3. DESCRIPTION OF THE MEASUREMENTS

3.1 MEASUREMENT PERIODS

At Deurganckdok ADCP tracks were sailed about every 13 minutes for 12.5 hours, in total 57 cross-sections or 28 cycles.

Calibration profiles were taken at 2 locations (left bank, right bank). Almost during every cycle, 1 calibration profile was taken, resulting in a total of 49 profiles.

Annex A gives the start and end points of the tracks, the sailed length and the course.

3.2 HYDRO-METEOROLOGICAL CONDITIONS DURING THE MEASUREMENT CAMPAIGN

3.2.1 Vertical tide during the measurements

The vertical tide was measured at the Liefkenshoek tidal gauge. Graphs of the tide at Liefkenshoek on the 6th of October 2011 can be found in Annex B. Table 3-1 gives the most important characteristics (high and low tide) of the tide at this gauge on the 6th of October 2011.

Table 3-1: High and low tide at Liefkenshoek on 06/10/2011

Liefkenshoek Tidal Gauge		
6 October 2011		
	Time [MET]	Water level [m TAW]
LW (1)	04:10	0.75
HW (2)	10:40	5.25
LW (3)	17:30	1.16
HW (4)	23:10	5.32

In Table 3-2 the tidal characteristics of the tide on the 6th of October 2011 are compared to the average tide over the decade 1991-2000 (AMT, 2003).

Table 3-2: Comparison of the tidal characteristics of 06/10/2011 with the average tide, the average neap tide and the average spring tide over the decade 1991-2000 for Liefkenshoek.

	Neap tide (1991 - 2000)	Avg Tide (1991 - 2000)	Spring Tide (1991 - 2000)	Tide 06/10/2011
Water level [m TAW]				
LW (1)	-	-	-	0.75
HW (2)	4.63	5.19	5.63	5.25
LW (3)	0.39	0.05	-0.18	1.16
HW (4)	-	-	-	5.32
Tidal difference [m]				
Rising (1 to 2)	4.24	5.14	5.81	4.50
Falling (2 to 3)	4.24	5.14	5.81	4.09
Rising (3 to 4)	4.24	5.14	5.81	4.16
Duration [hh:mm]				
Rising (1 to 2)	5:59	5:34	5:16	6:30
Falling (2 to 3)	6:40	6:50	7:02	6:50
Rising (3 to 4)	5:59	5:34	5:16	5:40
Tide (1 to 3)	12:39	12:24	12:18	13:20
Tide (2 to 4)	12:39	12:24	12:18	12:30
Tidal coefficient				
Rising (1 to 2)	0.82	1.00	1.13	0.88
Falling (2 to 3)	0.82	1.00	1.13	0.80
Rising (3 to 4)	0.82	1.00	1.13	0.81

The tidal coefficients from 0.80 up to 0.88 for the measured tide of the 6th of October 2011 indicate that this tide has a tidal range equal as the neap tide for the decade of 1991-2000, and therefore can be classified as such.

3.2.2 Meteorological data

Meteorological data at Woensdrecht (NL) was obtained from the Weather Underground website (Wunderground, 2011).

The weather on the 6th of October 2011 was dry. The wind blew all day from the west and south west at an average velocity of 25km/h. The air temperature varied between 6 and 13°C. The sky was most of the time covered with almost no precipitation.

3.3 NAVIGATION INFORMATION

An overview of the relevant navigation at the measurement location is given in Annex C.

3.4 REMARKS ON DATA

No major problems occurred on board of the Parel II.

Shipwakes (see Annex C) were removed from the data where possible.

4. PROCESSING OF DATASETS

4.1 CALIBRATION OF THE OBS TURBIDITY SENSOR

A crucial aspect of the accuracy and reliability of the data concerns the calibration of the OBS turbidity sensor. The calibration of the OBS sensor is necessary to convert turbidity into Suspended Sediment Concentration (SSC). An in situ calibration of the OBS3A was performed. At some depths water samples were taken by the pump sampler and were analysed by a laboratory for SSC. These SSC were used as 'ground truth' to calibrate the OBS turbidity sensor.

4.2 METHODOLOGY OF PROCESSING OF THE ADCP DATA WITH SEDIVIEW

DRL Software's Sediview was used to process the ADCP data. Sediview is designed to derive estimates of suspended sediment concentration throughout the water column using acoustic backscatter data obtained by ADCP's manufactured by RD Instruments of San Diego, California.

4.2.1 Acoustic backscatter theory

The acoustic theory governing backscatter from particles suspended in the water column is complex, but the following simplified formula serves to introduce the main factors that are relevant:

$$E = SL + SV + Constant - 20\log(R) - 2\alpha_w R$$

Where:

E = echo intensity,
 SL = transmitted power,
 SV = backscatter intensity due to the particles suspended in the water column,
 α_w = a coefficient describing the absorption of energy by the water,
 R = the distance from the transducer to the measurement bin.

The term $20\log(R)$ is a simple geometric function that accounts for the spherical spreading of the beam. The constant is required because each ADCP has specific performance characteristics.

In order to measure the suspended sediment concentration in the water column it is necessary to relate the backscattered sound intensity to the mass concentration in the water. For the purposes of measuring solids concentration on site, it can be shown that the relationship is as follows (derived from Thorne and Campbell, 1992 and Hay, 1991 in DRL (2003)):

$$\log_{10} M_r = \{dB + 2r(\alpha_w + \alpha_s) - K_s\} S^{-1}$$

Where:

$M(r)$ = mass concentration per unit volume at range, r
 S = relative backscatter coefficient
 K_s = site and instrument constant
 dB = the measured relative backscatter intensity (corrected for beam spreading)
 α_w = water attenuation coefficient
 α_s = sediment attenuation coefficient, which is a function of the effective particle size

In this expression there are four unknowns: S , K_s , α_w and α_s . These parameters are to be determined within Sediview (6. Annex E).

4.2.2 Water sampling and transect sailing

To calibrate Sediview for suspended sediment concentration, two water samples are taken at the beginning and at the end of each transect (see 3.1). Both samples are taken within the range of reliable data of the ADCP. For the near-surface sample this means in bin 3 or 4, for the near-bed sample this means at about one or two meter above the sidelobe.

Water sampling is done together with CTD-OBS measurement in order to have two independent suspended sediment concentration measurements for each sample. OBS measurements were compared to the water samples and recalibrated as mentioned in §4.1. The water samples were used for Sediview calibration, while cross-calibrated OBS measurements were used as a back up check. The salinity and temperature was used to compute the acoustic water absorption (water attenuation coefficient). All water samples were analysed as is described in 4.2.3.

4.2.3 Calibration for suspended sediment concentration within Sediview

4.2.3.1 Calibration workset

The calibration workset consists of ADCP-files, sampling times, sampling depths, SSC obtained from water samples and SSC, temperature and salinity obtained from CTD-OBS readings.

The suspended sediment concentration of the water samples was determined. One-litre samples were filtered over a preweighed desiccated 0.45 micron filter, after which the filter is dried in an oven at 105°C, cooled and weighted (NEN 6484).

4.2.3.2 SSC calibration per ensemble pair

In the Sediview calibration process the following parameters must be defined: the site and instrument constant (K_s), the relative backscatter coefficient (S) and the effective particle size per ensemble-pair (near-surface sample and near-bed sample) in order to fit the Sediview-estimate with the suspended sediment concentration of the water samples. These parameter sets may not differ too much from the previous parameter sets, as the environmental conditions will not change that much over a small time interval. To obtain a smooth progress in time of K_s , S and effective particle size an iterative approach is used (see Annex E).

4.2.4 Sediview configuration

4.2.4.1 Discharge and suspended sediment concentration estimates

The ADCP measures most of the water column from just in front of the ADCP to 6% above the bottom when the beam angle is 20°. The shallow layer of water near the bottom is not used to compute discharge and suspended sediment concentration due to side-lobe interference. When the ADCP sends out an acoustic pulse, a small amount of energy is transmitted in side lobes rather than in the direction of the ADCP beam. Side lobe reflection from the bottom can interfere with the water echoes and can give erroneous data. The thickness of the side lobe layer for the ADCP used during this campaign is 12% of the distance from the transducers to the bottom.

Near the banks the water depth is too shallow for the ADCP to profile.

For each of those unmeasured regions, an estimate of the discharges and suspended sediment concentration is made. The measured and unmeasured regions in the cross section are shown in Figure 4-1 and Figure 4-2.

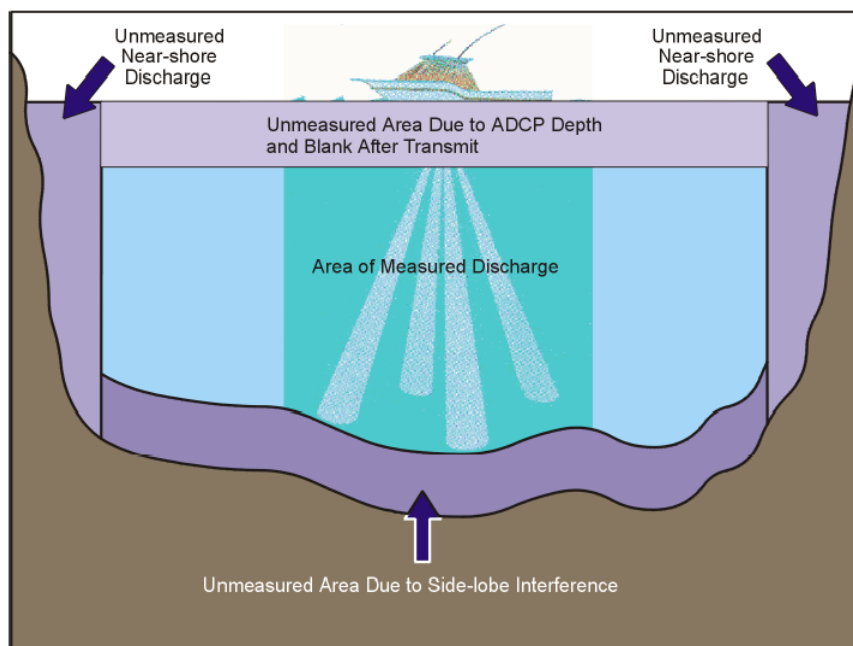


Figure 4-1: Unmeasured regions in the cross section (from RD Instruments, 2003)

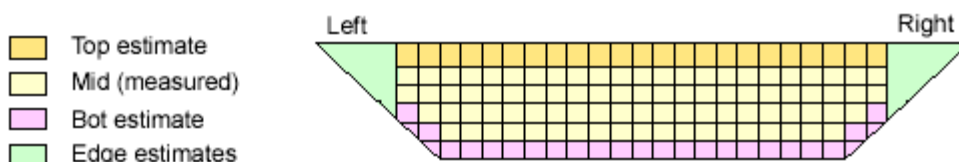


Figure 4-2: Measured and estimated discharges and sediment fluxes within Sediview (DRL, 2005)

4.2.4.1.1 Top/bottom estimates

The sediment concentration and discharge at the top of the water column is assumed to be the same as the concentration and discharge in the first measured bin.

The sediment concentration between the bottom and the lowest valid bin is assumed to be an increase of the lowest valid bin. As the concentration grows approximately linear from the lowest valid bin to the bottom, and as Sediview/Matlab uses a constant concentration factor for these deepest bins, we use a concentration factor of 125% (Figure 4-3).

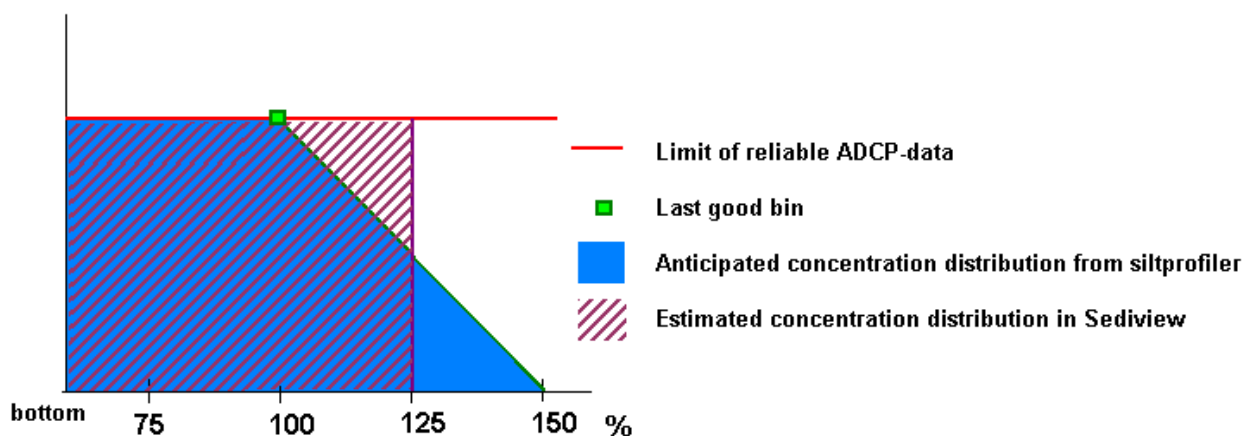


Figure 4-3: Principal of bottom estimate of the sediment concentration in Sediview

Table 4-1: Extrapolation methods for top and bottom variables

Variable	Top	Bottom
Discharge Method	Constant	Power
Concentration factor	100%	125%

The discharge for the bottom water layer is estimated by using the power method. Chen (1991) discusses the theory of power laws for flow resistance. Simpson and Oltmann (1990) discuss Chen's power law equivalent of Manning's formula for open channels (with $b=1/6$) (RD Instruments, 2003).

$$u/u^* = 9.5(z/z_0)^b$$

Where:

z = Distance to the channel bed [m]
 u = Velocity at distance z from bed [m/s]
 u^* = Shear velocity [m/s]
 z_0 = Bottom roughness height [m]
 b = Exponent (1/6)

4.2.4.1.2 Edge estimates

The shape of the edges of the cross section is assumed to be near triangular due to the banks of the river Scheldt. Five data ensembles are to be averaged to determine the left and right bank mean velocities used for calculation of edge estimates.

The distance from start- and endpoint to the bank is calculated from the theoretical start- and endpoint at the bank to the effective start- and endpoint. The theoretical points are taken at the banks (see Table 2-1).

The formula for determining the near shore discharge is:

$$Q_{shore} = CV_m L d_m \text{ [m}^3/\text{s]}$$

Where:

C = Coefficient (0.35 for triangular, 0.91 for rectangular shape)

V_m = Mean water velocity in the first or the last segment [m/s]

L = Distance from the shore to the first or the last segment specified by the user [m]

d_m = Depth of the first or the last segment [m]

The coefficient (C) has been set to 0.91 (triangular shape of the banks).

4.2.4.2 Contour plots of the transects

All contour plots show perpendicular and parallel projected values on the straightened sailed transects. The heading of the straightened sailed transect is defined by picking 2 points in the straight part of the line after having corrected the heading of the ADCP compass. The compass offset is derived from a comparison of the ADCP's bottom track with the external GPS data.

4.2.5 Output

General transect information containing start-stop coordinates of each sailed transects with stop time, track length and heading is given in Annex A.

In Annex G, four contourplots were generated for each transect showing the distribution of suspended sediment concentration & sediment flux as well as the flow velocity perpendicular and parallel to the transect. The following conventions were used:

- Distances on the X-axis were referenced to the starting point of the transect, the start of the sailed transect is always at distance equal to zero.
- Left bank is always shown left, right bank on the right side. For transect DGD, left bank was taken to be the western quay wall and the right bank to be the eastern quay wall considering the dock as being a tributary to the Scheldt river.
- Perpendicular flow velocities and fluxes are positive for downstream flow (ebb, out of Deurganckdok), negative for upstream flow (flood, inbound).
- Parallel flow velocities are positive for flow going from the left bank to the right bank, and negative for flow going from the right bank to the left bank.
- Absolute Depth is given in meters above TAW.

Also a depth-averaged velocity plot was generated for the flow velocity perpendicular to the transect. (see Annex F).

Tables in Annex G) give the values for discharges, sediment fluxes and the average measured SSC for the total cross-section with:

- Mid = measured part of the cross-section
- Top = top part of the cross-section
- Bottom = bottom part underneath the sidelobe
- Edge (left, right) = edge estimates to left & right bank
- Total = Mid+Top+Bottom+ Edge values

The graph in Annex H gives the temporal variation of the total flux, total discharge and total measured SSC for the whole through tide measurement at Deurganckdok.

5. PRELIMINARY ANALYSIS OF THE DATA

5.1 OCTOBER 6ST 2011 SURVEY

As Deurganckdok is situated along the part of the river Scheldt under tidal influence, it is subject to complex current fields near its entrance. The measured current field shows a vortex pattern depending on the tidal phase. During ebbing tide the vortex at the entrance of the dock is a counter-clockwise one and during rising tide it is a clockwise one. This is shown in the contour plots by inflow (negative) on the western side (left) and outflow on the eastern side of the entrance during ebbing tide and vice versa for flooding tide. (Annex F).

During slack water we see a current field with opposing current directions in the upper part of the water column compared to the lower part of the water column. For high water, there is an inflow (negative) near the bottom and outflow (positive) near the surface. This particular pattern is the result of expected salinity density currents occurring near the entrance of Deurganckdok. The same event is seen at low water when the dock contains waters of higher salinity than the river; here we see an outflow near the bottom and inflow near the surface.

From the backscatter interpretation into suspended sediment concentration, one can notice in general a higher concentration during flood compared to during ebb. The highest SS concentrations (incoming and outgoing) occur halfway in between LW and HW.

It can also be noticed that during the complete measurement cycle the incoming water has a higher SSC than the outgoing water except during 3 hours starting at LW (Table 5-1, Figure 5-1). The incoming averaged suspended sediment concentrations range from 19 mg/l up to 90 mg/l during ebb and from 54 mg/l to 124 mg/l during flood, whereas the outgoing concentrations range from 18 to 62 mg/l during ebb and from 48 to 165 mg/l during flood.

Table 5-1 Average SSC's over the sailed transect

Tide	Concentration [mg/l]								
	overall SSC			incoming SSC			outgoing SSC		
	min	average	max	min	average	max	min	average	max
Ebb	18	42	69	19	52	90	18	35	62
Flood	60	85	139	54	88	124	48	84	165

Considering the sediment fluxes, Figure 5-1 shows that residual incoming transport is slightly dominating during flood and lasts until approximately HW. Any residual outgoing sediment transport can be observed during the measurement campaign. In the first hour after high water there is a residual incoming sediment flux even though the resulting discharge is outgoing at that moment (see Figure 5-1). To visualize in- and outflow, the absolute values of the inflow have been used. If the measured total line is negative, it means that measured inflow is greater than measured outflow. Or a negative measured total value means a total inflow/influx, a positive measured total value means a total outflow/outflux.

During HW the outflow is approximately twice as high ($\pm 500 \text{ m}^3/\text{s}$) as during LW (Figure 5-1). Incoming density currents near the bottom due to a higher salinity in the river than in the dock reach their maximum around slack tide on the Scheldt at approximately high water.

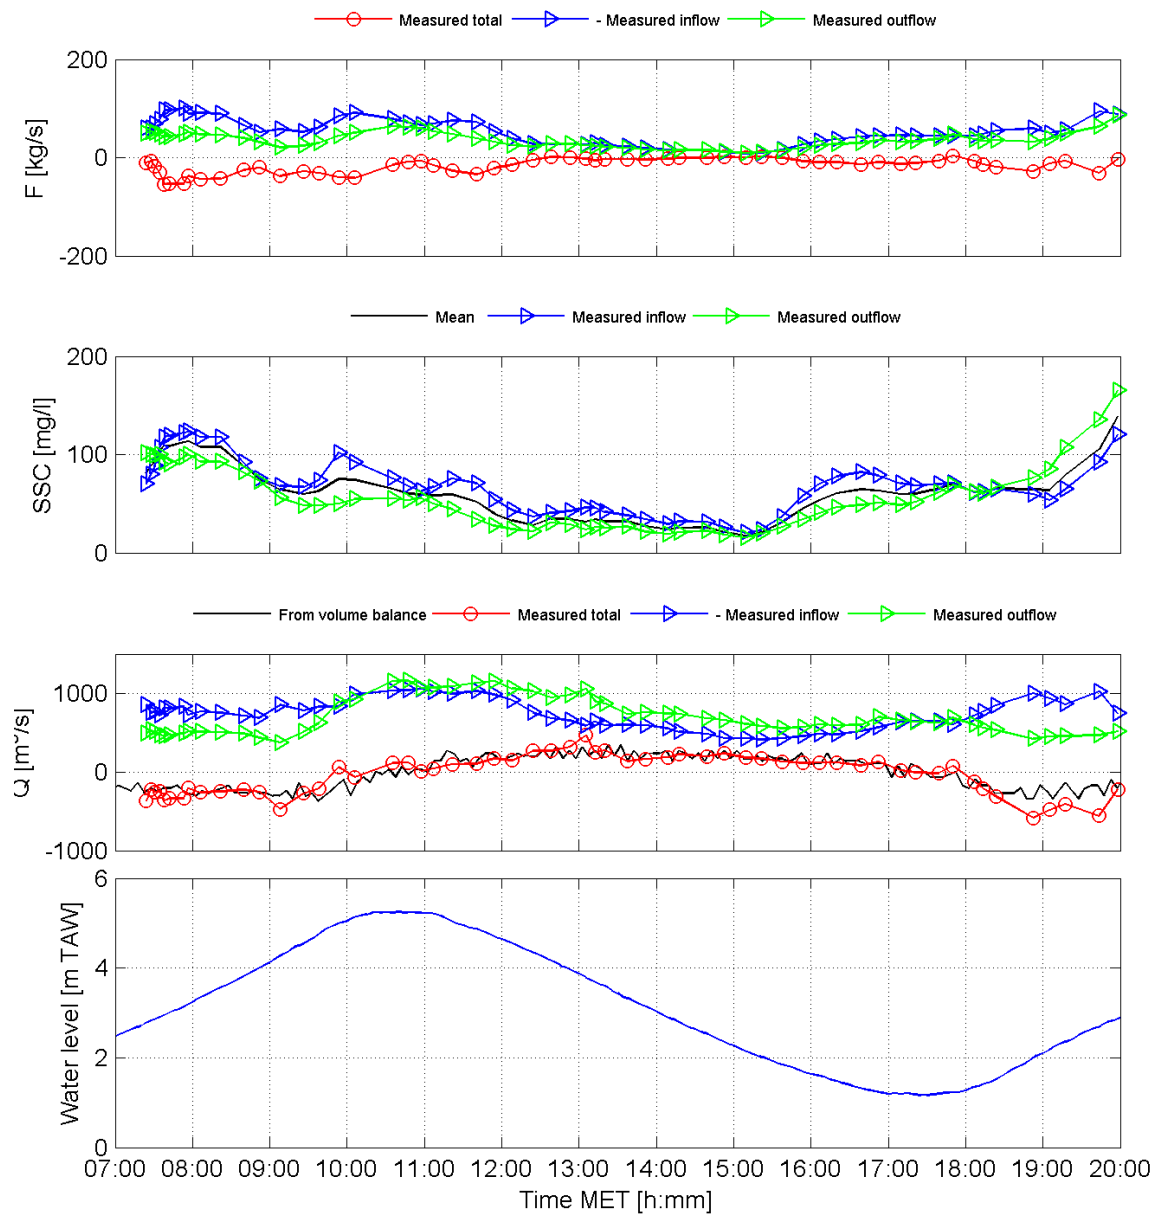


Figure 5-1 Total in/out/net flux, Total incoming/outgoing SSC, average in/out/net discharge and water level at DGD on October 6th 2011.

5.2 INTERCOMPARISON WITH EARLIER SURVEYS AT DGD

Since 2005, IMDC has organized several through tide measurement campaigns at the entrance of Deurganckdok. The course and results of the campaigns were described in IMDC rapports and are listed in Table 5-2. Table 5-2 gives also an overview of the tidal phase during the campaigns. Conditions near the entrance of Deurganckdok have been simulated in Delft3D and processed by IMDC (2006n) in order to compare simulation with observed data.

Since the first measurement campaign a several human impacts took place in or near Deurganckdok which influenced the siltation processes. The impacts are also given in Table 5-2.

Table 5-2: Hydrological conditions during through tide ADCP measurements at the entrance of DGD

Tidal Coefficient at tidal gauge: Liefkenshoek				
PROJECT (DESCRIPTION)	Date	Tidal coefficient	Tidal phase	Fresh water discharge at Schelle [m³/s]
HCBS 1 (IMDC, 2006m)	17/11/2005	1.10	Spring	91*
HCBS 2 (IMDC, 2006c)	22/03/2006	0.97	Average	94*
HCBS 2 (IMDC, 2007o)	27/09/2006	1.03	Average	33*
The dock is enlarged to 1.019 km² after completing the 3 rd phase				
DGD 1 (IMDC, 2008a)	24/10/2007	1.02	Average	46*
DGD 2 (IMDC, 2008k)	11/03/2008	1.17	Spring	286*
DGD 3 (IMDC, 2008u)	19/06/2008	1.15	Spring	93*
DGD 3 (IMDC, 2008v)	26/06/2008	0.97	Average	69*
DGD3 (IMDC 2008x)	24/09/2008	0.81	Neap	75*
DGD 3 (IMDC, 2009a)	30/09/2008	1.08	Spring	82*
DGD 3 (IMDC, 2009e)	02/12/2008	0.98	Average	154*
DGD 3(IMDC,2009f)	10/12/2008	0.97	Average	222*
DGD 3(IMDC,2009i)	06/03/2009	0.82	Neap	99*
DGD 3(IMDC,2009n)	12/03/2009	1.24	Spring	129*
Since June 2010, the sill at the entrance is completely dredged and CDW construction is completed in August 2011.				
Eff DGD (IMDC, 2012a)	28/09/2011	1.06	Avg/Spring	40**
Eff DGD (IMDC, 2012b)	06/10/2011	0.83	Neap	55**
Eff DGD (IMDC, 2012a)	13/10/2011	1.17	Spring	60**

* Daily fresh water discharge based on AZ (1974) and ** 5-day averaged water discharge based on FHR (2009).

5.2.1 Fresh water discharge

The fresh water discharges at Schelle were calculated from the tributaries, which were recorded during long term measurements campaigns by Flanders Hydraulics Research (FHR). The calculation procedure before this project is described in AZ (1974) and is based on the use of correction coefficients that take in account the surface of the hydrological basins. Since 2009 FHR is using a new calculation procedure where the discharges from the tributaries are averaged about 5 days. This procedure is described in FHR (2009) and the results about the measurement campaign are given in Annex B. The daily or 5-day averaged fresh water discharges at Schelle are listed in Table 5-2. The evolutions of the fresh water discharge at Schelle for all former campaigns are shown in Figure 5-2.

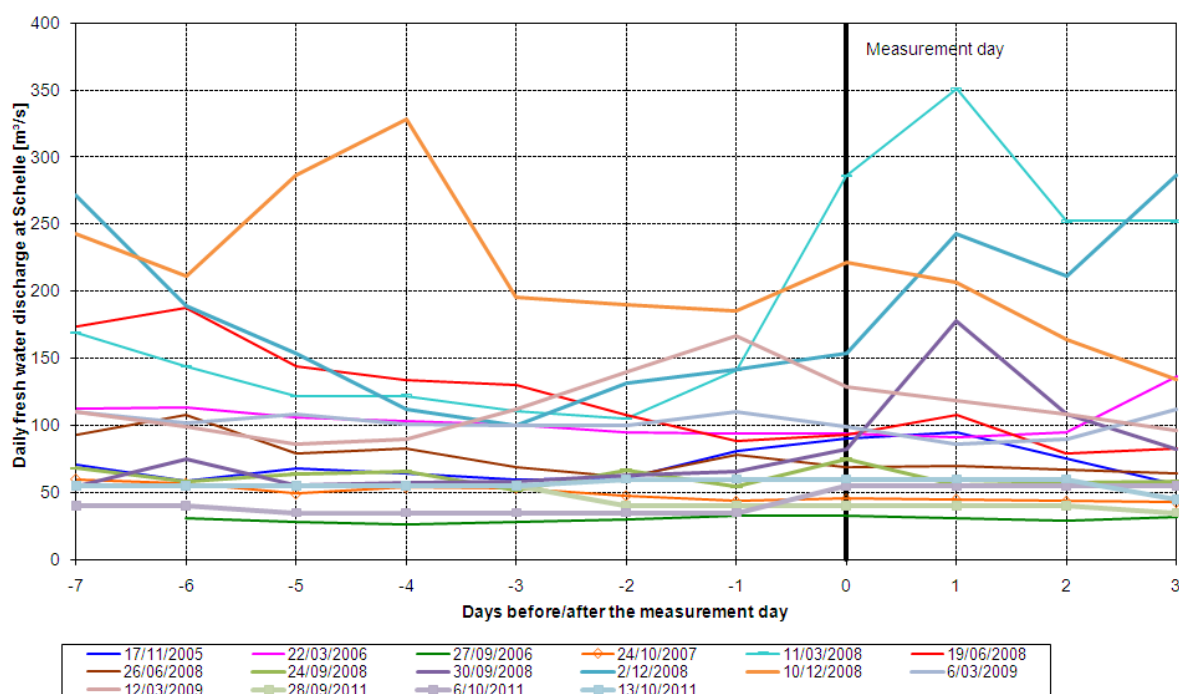


Figure 5-2: Daily fresh water discharge evolution at Schelle before and after a measurement day.

The results presented in Annex BB.2 are based on a long-term simulation over a period of 30 year (1971-2000) with the SIGMA-model for MKBA (IMDC, 2006r). The mean discharge is the annual average ten days' discharge, calculated with simulated long-term measurements. The high and low discharges are also annual ten days' discharges, and are calculated as mean discharge $+2\sigma$ and mean discharge -2σ .

5.2.2 Sediment distributions and current pattern around HW

In Annex I the earlier measurement campaigns have been compared for about 3 hours after high water because it appeared that during the first campaigns the horizontal ebb eddy currents were clearly visible at 3 hrs after HW. Sediment distributions as well as current pattern in the cross section are similar for all campaigns. The western side of the dock is situated at the left of these figures, the eastern side at the right. The sediment distribution and current pattern of this neap tide measurement is less pronounced than the patterns during average and spring tide measurements.

The circulation pattern and sediment concentration have been compared about 1h after HW because it appeared that during the first campaigns the density currents were clearly visible at 1h after HW. Again the current pattern is almost identical between the different days with a salinity wedge intruding near the bottom of the dock and compensatory outflow of fresher water near the surface. Except for the measurements at 11/03/2008, 02/12/2008, 12/03/2009 the sediment distributions are very similar between the different campaigns.

The current deflecting wall (CDW) construction at the Northside of Deurganckdok should influence the horizontal eddy during flood. The CDW deflects the upper part of the water column into the dock. A near bed sill deflects the high concentration bottom layers towards the river Scheldt. Two moments during flood are selected to make an intercomparison with earlier sailed measurement campaigns without CDW and with sill (Table 5-2): 3 and 1 hours before HW.

The flood horizontal eddy starts about 3 hours before HW and is finishing about HW. At 3 hours before HW the current pattern is a combination between a horizontal eddy and density current. At 1 hour before HW the eddy current is dominating. The velocities of the CDW measurement are lower at the North- and the Southside of the dock which means that the eddy current is less strong than without CDW (Figure 5-3 and Figure 5-5).

The difference in SS concentration distribution is not very clear, except that the SS concentrations of the CDW measurements are higher, especially on 13/10/2011 (Figure 5-4 and Figure 5-6). The higher concentrations may be related to the presence of turbidity maximum on the river Scheldt during the last measurement or/and the absence of the sill (Figure 5-9).

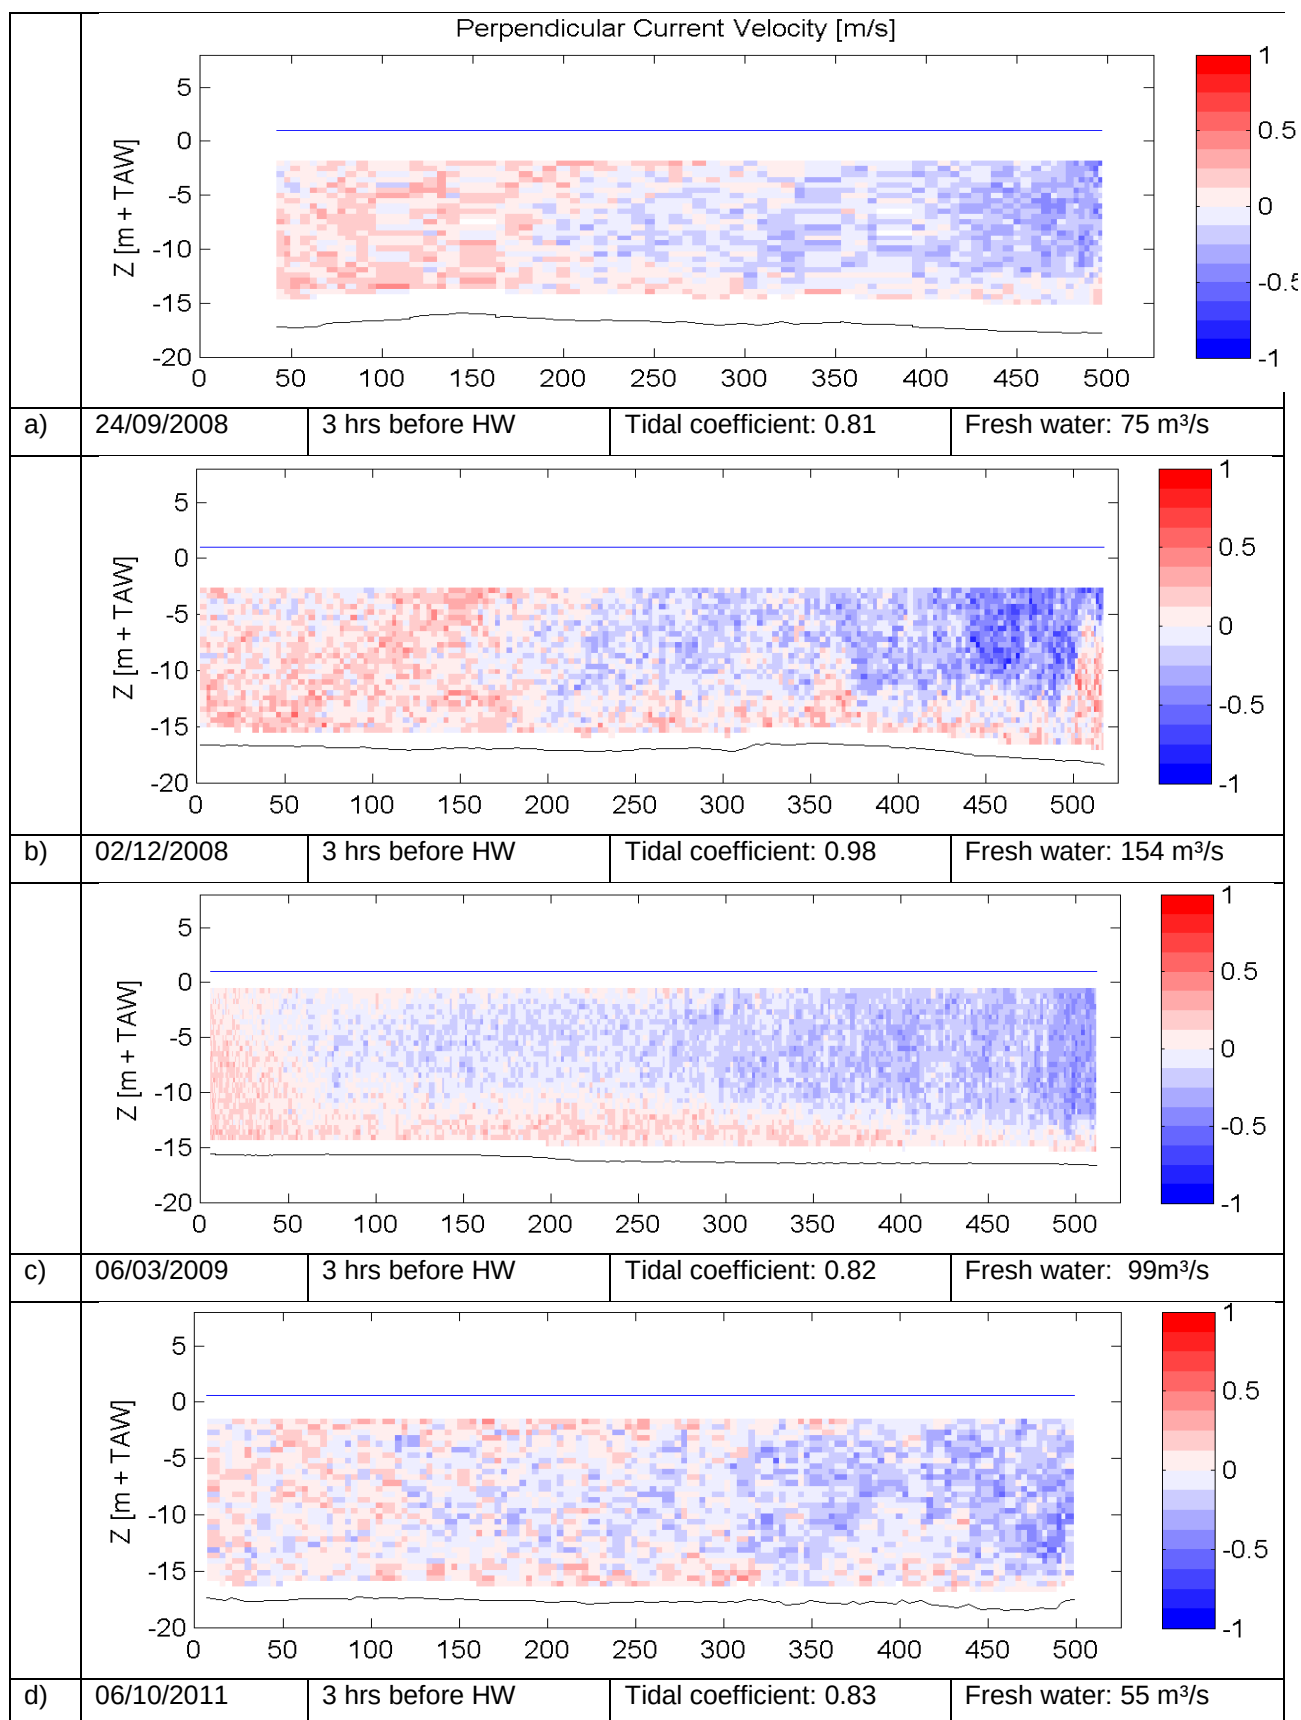
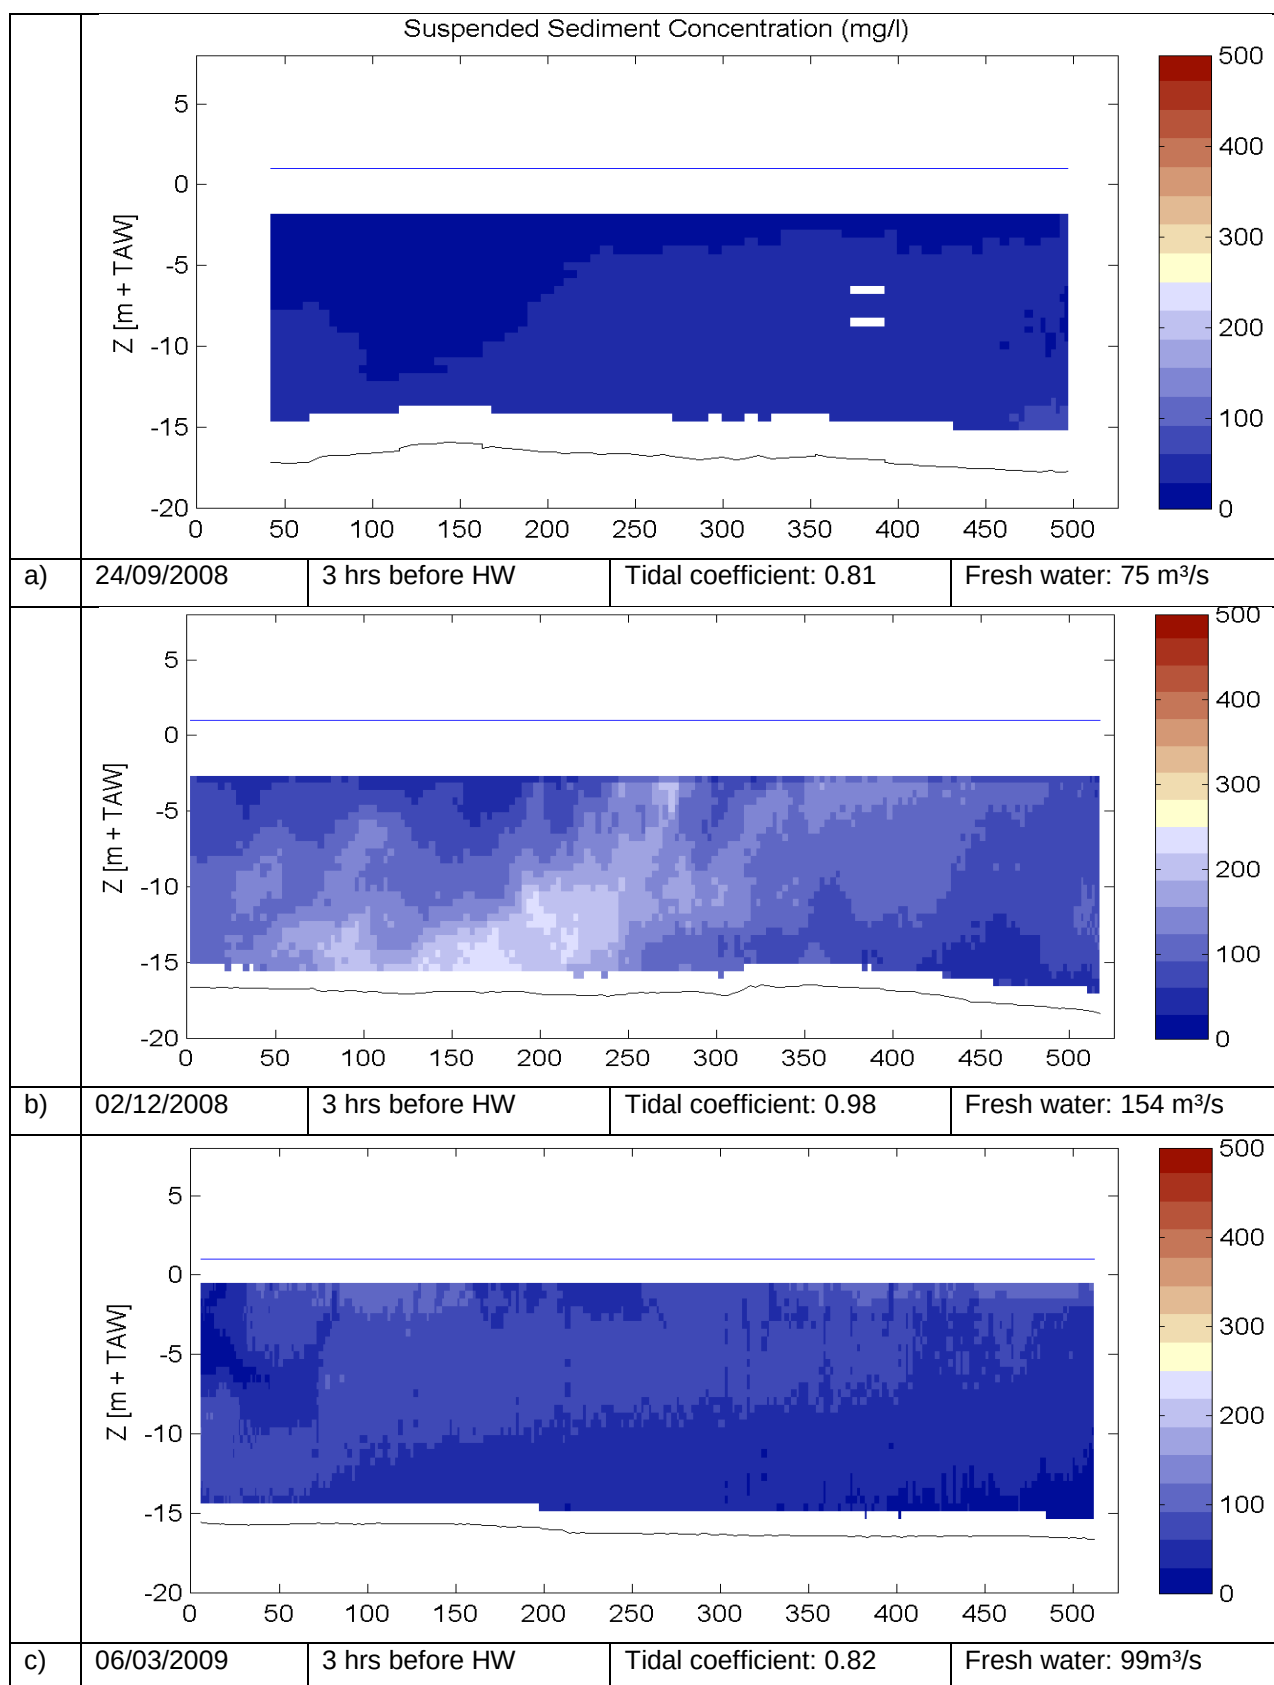


Figure 5-3: Perpendicular current velocity at 3hrs before high water at different neap tides



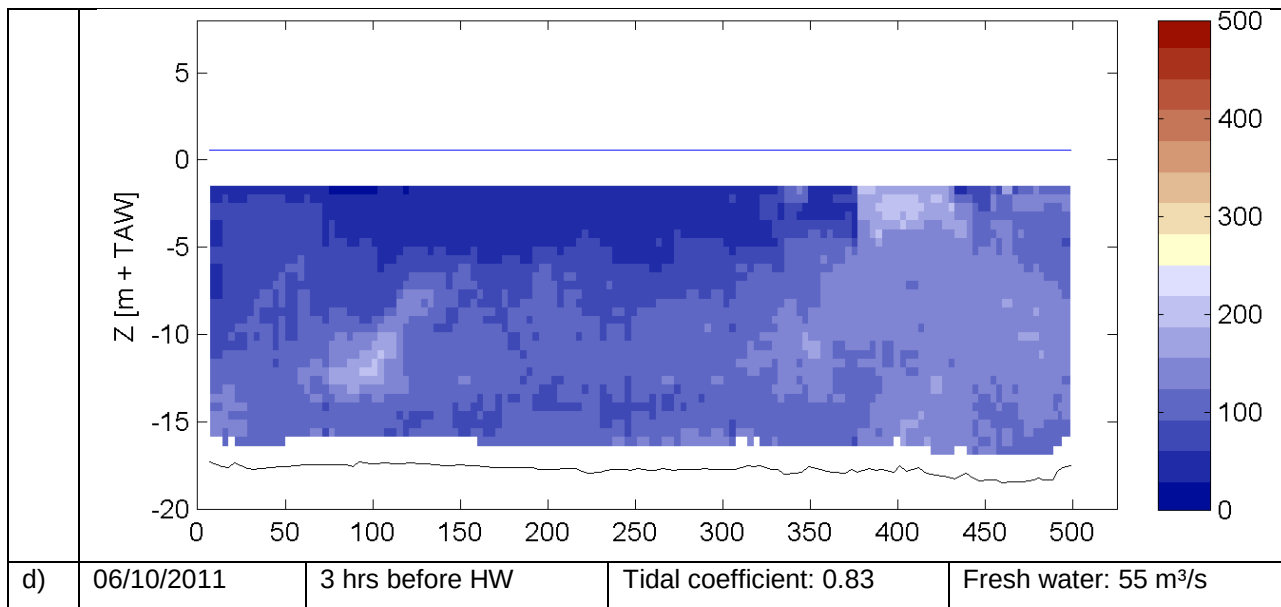
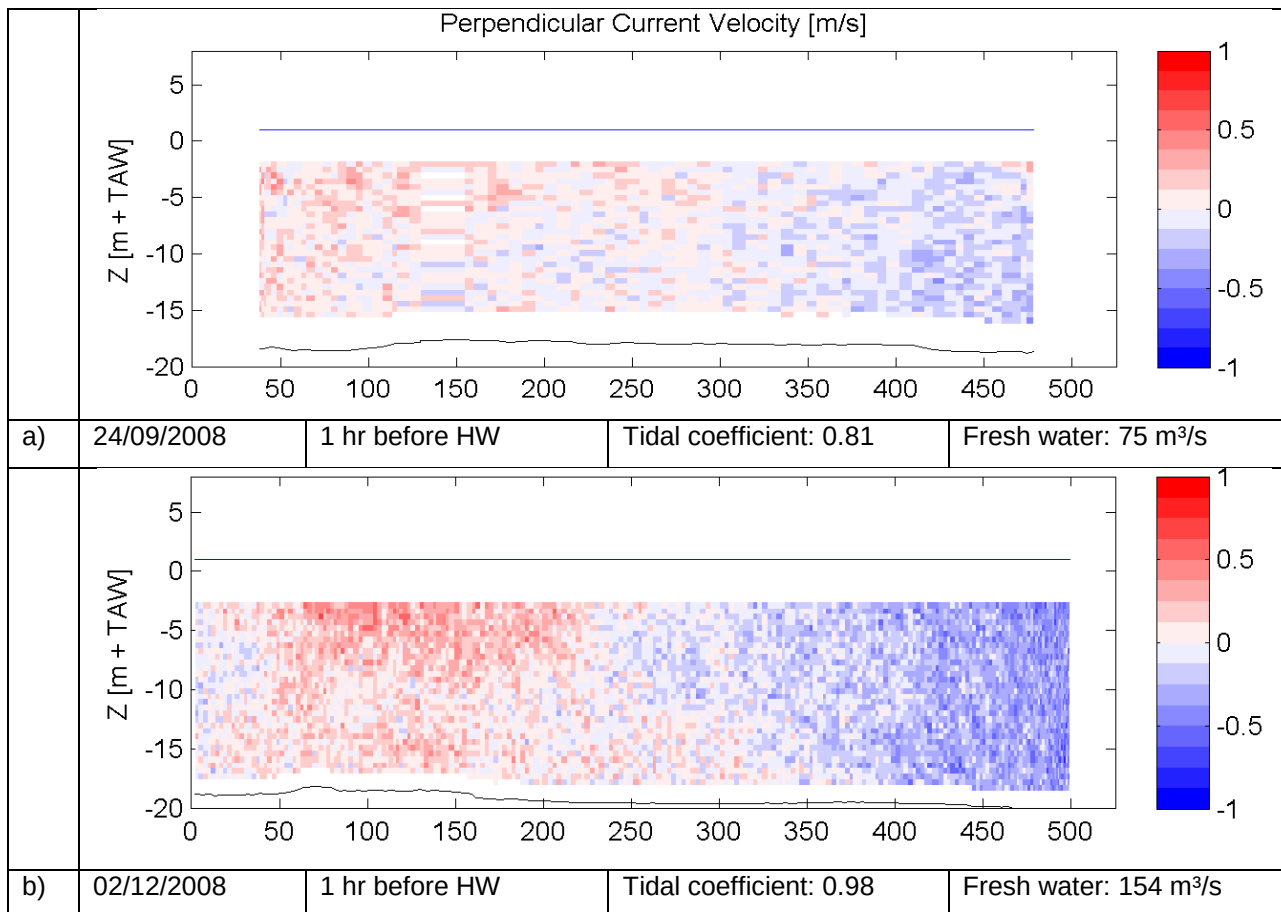


Figure 5-4: Suspended sediment concentration at 3hrs before high water at different neap tides



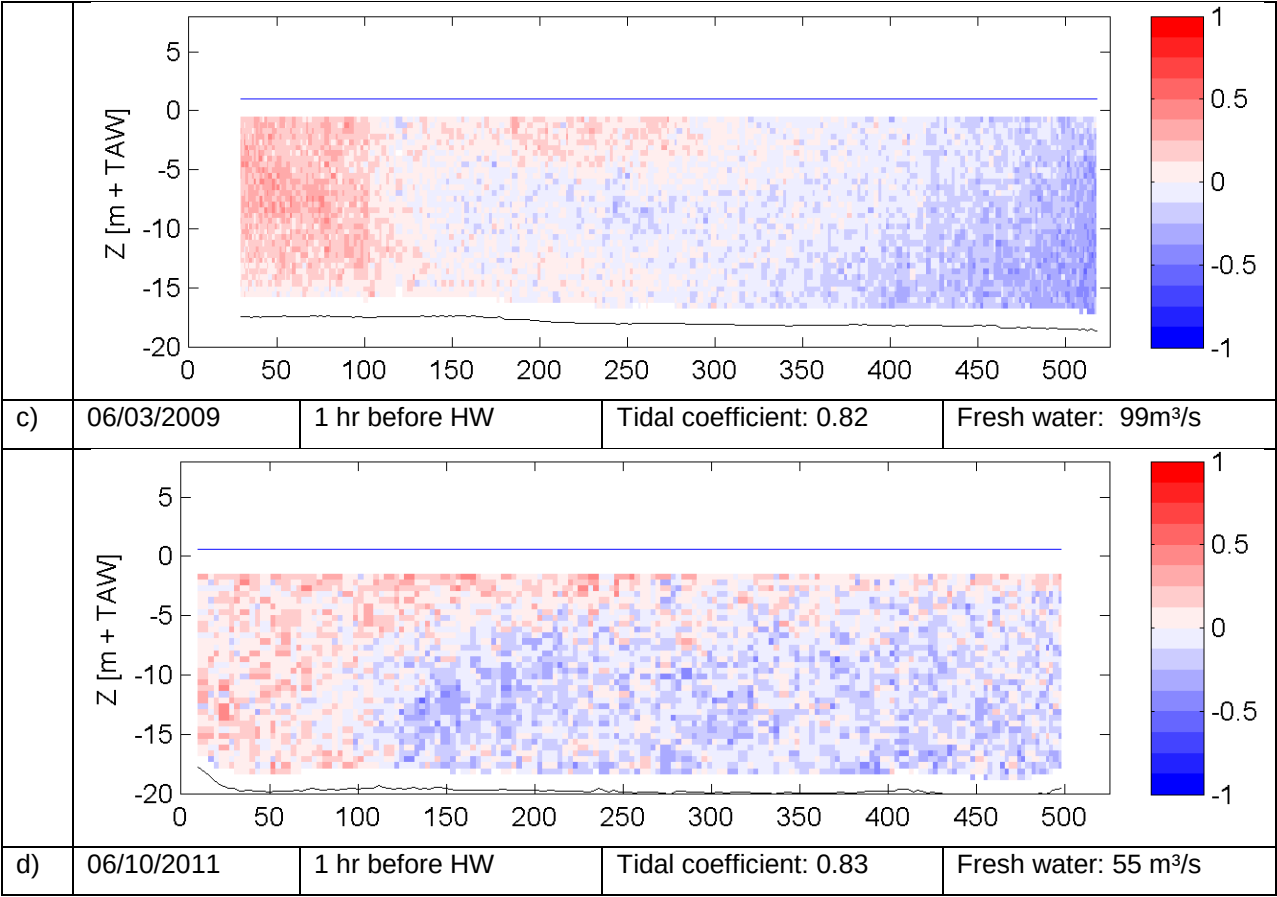
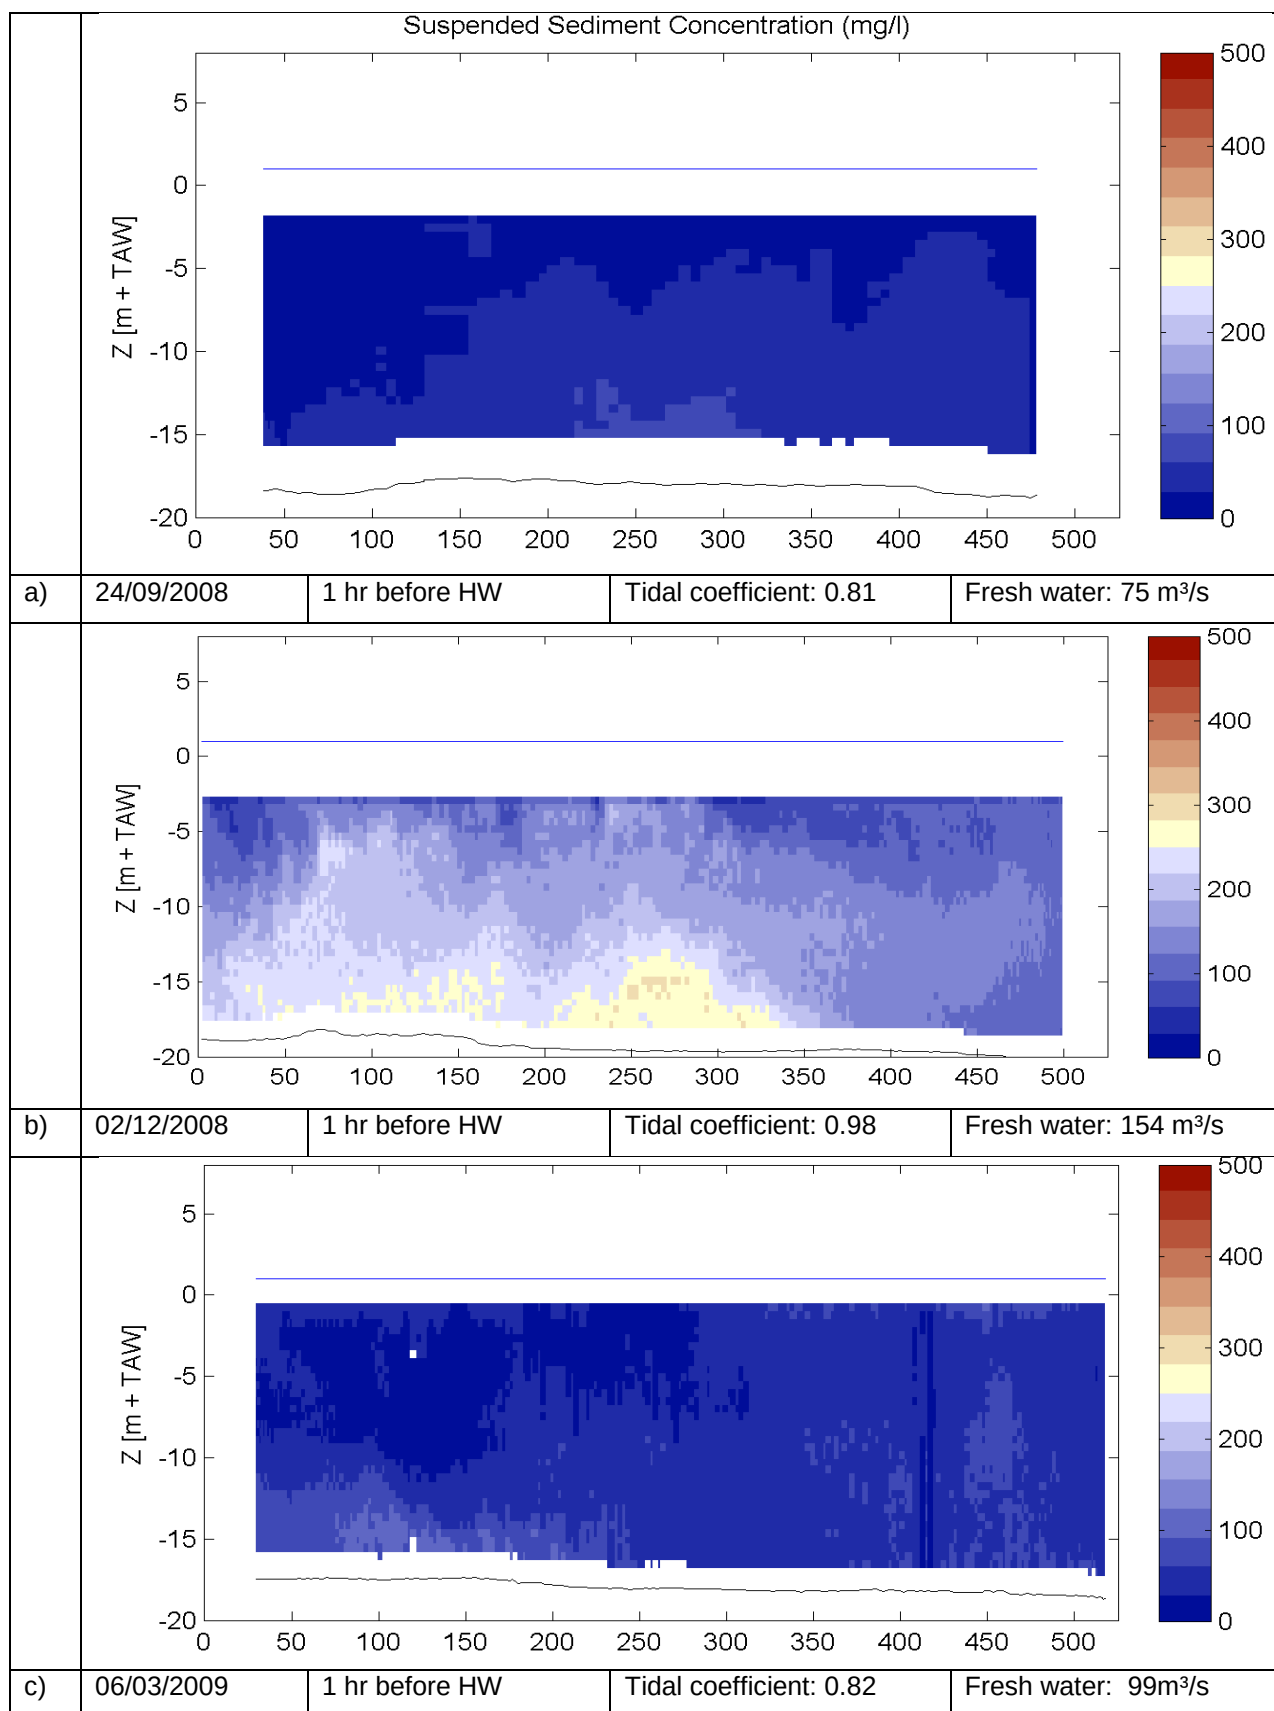


Figure 5-5: Perpendicular current velocity at 1hr before high water at different neap tides



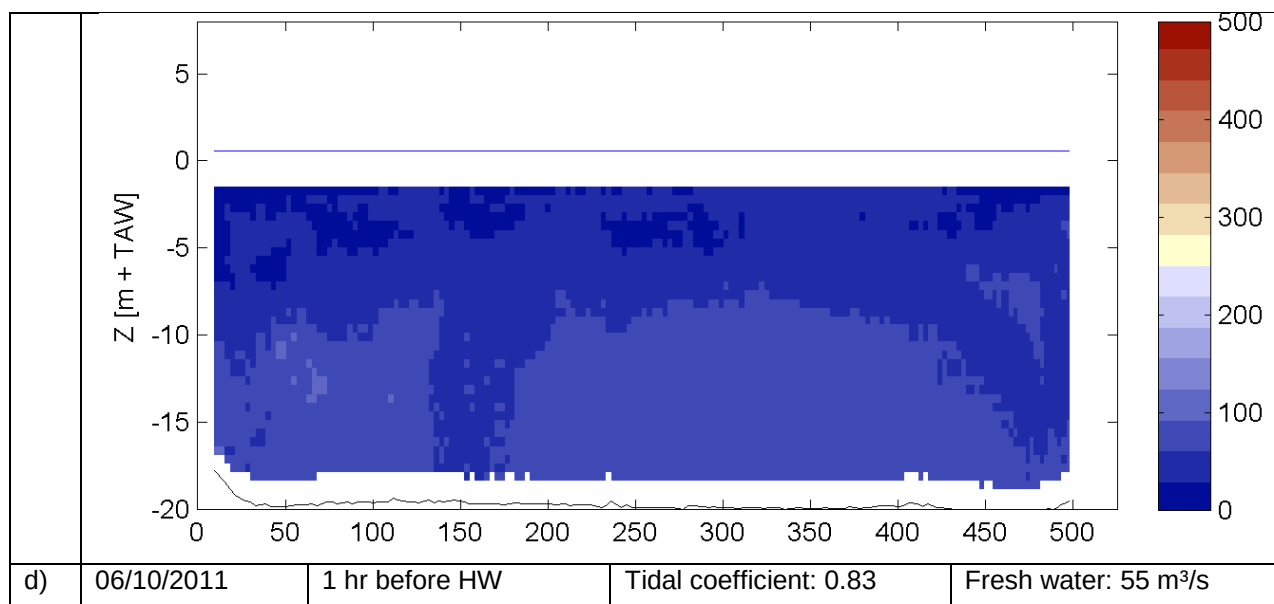


Figure 5-6: Suspended sediment concentration at 1hr before high water at different neap tides

5.2.3 Water balance

The volume of water, crossing the dock's entrance during the complete measurement day was calculated by integrating respectively total incoming and total outgoing discharge. The absolute values of both volumes were added up to know the total water exchange through the transect on the 6th of October 2011. Flood and ebb total water exchange were calculated with the same technique.

Next to the measured total water exchange, the theoretical exchanged water volume due to tidal filling was calculated by integrating tidal difference over time multiplied by the surface area of Deurganckdok.

Table 5-3 Total water exchange compared to tidal filling water exchange at transect DGD during ebb, flood and the complete measurement day

	Q Exchanged [m³]	source
Measured Total Ebb	35 760 963	ADCP measurement
Tidal Emptying	4 150 819	Volume balance
Measured Total Flood	29 628 237	ADCP measurement
Tidal Filling	4 246 017	Volume balance
Measured Total	65 389 200	ADCP measurement
Tidal Filling/Emptying Total	8 396 836	Volume balance


During flood on the 6th of October 2011, 29.6 million m³ water crossed the entrance and during ebb it was 35.8 million m³ (see Figure 5-7). In total 65.4million m³ water crossed the docks entrance, of which only 13% (8 million m³) can be contributed to tidal filling of Deurganckdok

(see Figure 5-7). The other 87% of water displacement at the entrance must be caused by density and eddy currents.

A 3-D mathematical model was used to analyse the different exchange mechanisms between the river and the dock and to know the effect of CDW (WL Delft Hydraulics, 2004). By comparing the total amount of water leaving or entering the dock with the tidal volume, it was possible to identify that horizontal water exchange, due to density currents and eddy formation, is the dominant factor. The analysis led to the following conclusions:

- Without CDW, tidal filling is responsible for +/- 18% of the total water exchange, eddy currents for +/- 27% and density currents for +/-55%.
- With CDW the total water exchange will reduce with +/- 6% as a result of reduction in eddy currents of +/- 15% and in density currents of +/- 4%. The reduction will change the proportions of the total water exchange in: tidal filling +/- 19%, eddy currents +/- 25% and density currents +/- 56%.

In the total water exchange of the measurements is not possible to calculate the proportions of the eddy and density currents to evaluate the effect of the CDW. The expected difference of 1% in tidal filling is negligible in comparison to the total water exchange and have the same order of magnitude as the expected error on the measurement (see below). The measured proportions of tidal filling over the previous campaigns (without CDW) are varying between 10% and 20% which can be explained by the different hydro-meteorological conditions on the campaigns. The variation in hydro-meteorological conditions has made it difficult to make a preliminary evaluation of CDW. An extensive evaluation will be covered in the analysis report.

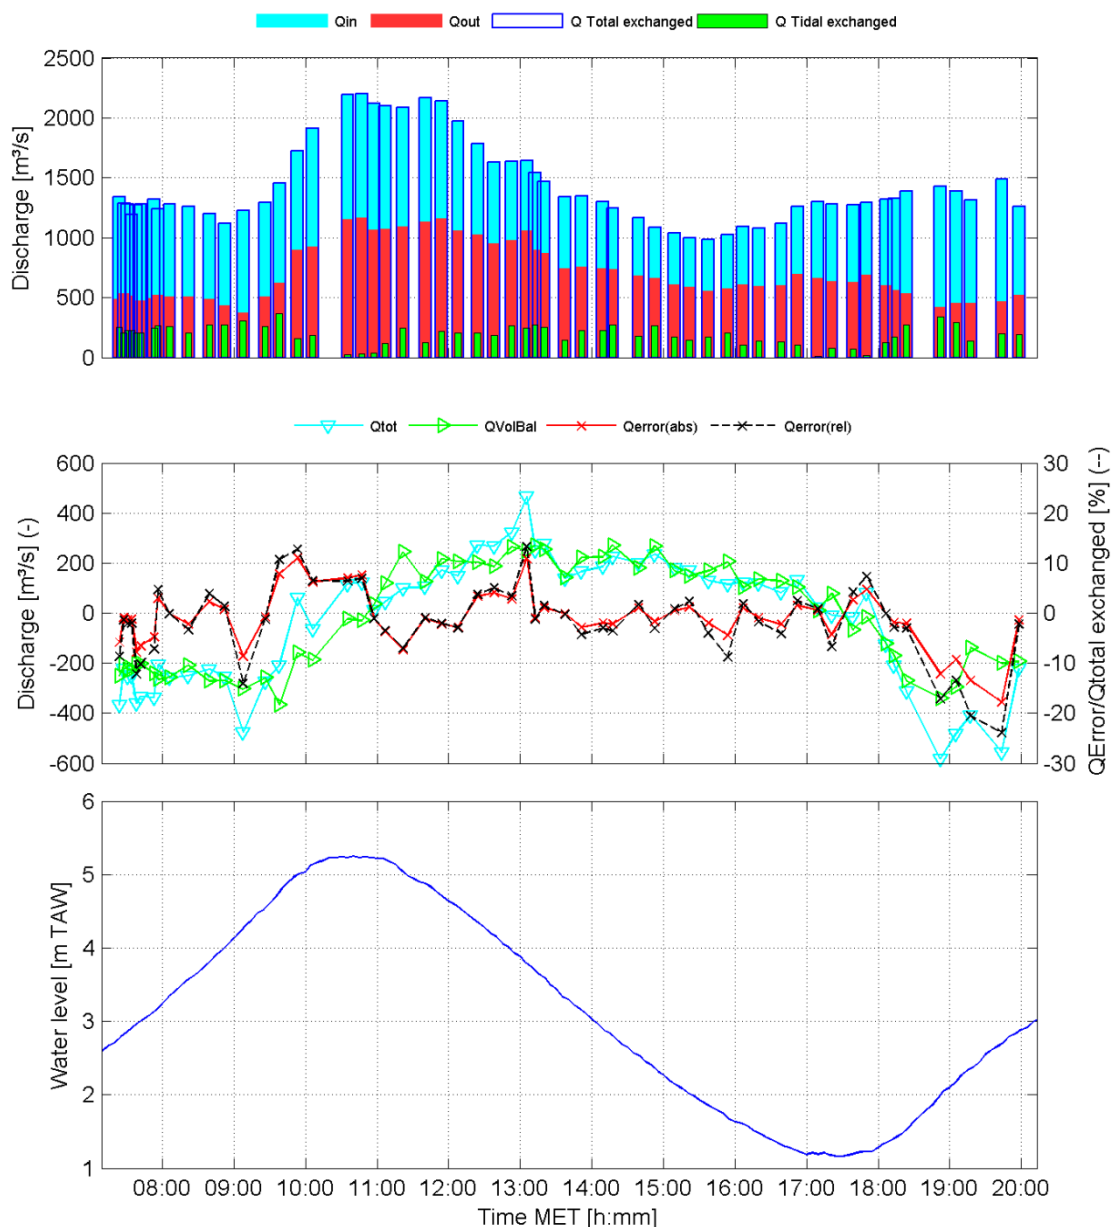

*Figure 5-7: The water discharge at the entrance of Deurganckdok over a tidal curve on 06/10/2011. Top: Total incoming (Q_{in}) and outgoing (Q_{out}) discharge including the total water en tidal exchange;
Central: Measured residual discharge (Q_{tot}) versus theoretical residual discharge (Q_{VolBal}) and correction offset (Q_{error}) including relative error; Below: tidal curve.*

The water balance almost matches; as the measured filling of the dock is 4.25 million m^3 over a period where tidal filling (calculated by integrating tide) is 4.15 million m^3 (Table 5-4). The filling of the dock is thus slightly underestimated by the measurements with 0.1 million m^3 . In comparison to the total water exchange during flood is the overestimation 3.1% (Table 5-5). During emptying the dock we determine an underestimation of 0.6%.

In comparison to the 8.4 million m^3 of water exchanged by tidal filling/emptying, overestimation of 1 million m^3 seems rather reasonable (Table 5-5), and compared to the total exchange of 65 million m^3 , the underestimation error is negligible (only 1.7% of the total exchanged volume).

Table 5-4 Total residual, incoming and outgoing water volumes in Deurganckdok during the measurement campaign of 06/10/2011 compared to tidal filling/emptying volumes.

	Q Total Net [m³]	Q Total In [m³]	Q Total Out [m³]
Measured Ebb*	3 948 630	-15 906 166	19 854 797
Tidal Emptying**	4 150 819	-	-
Measured Flood*	-5 157 850	-17 393 044	12 235 194
Tidal Filling**	-4 246 017	-	-
Measured Net*	-1 209 220	-33 299 210	32 089 990
Tidal Emptying Net**	-95 197	-	-

(*: data from ADCP measurement, **: data derived from integration of tide)

Table 5-5 The difference between measured data and integrated tide data during the measurement campaign of 06/10/2011.

	Q error [m³]	Q error/water exchange* [%]
Overestimated outgoing volume	-202 189	-0.6
Overestimated ingoing volume	911 833	3.1
Overestimated total volume	-1 114 022	-1.7

One of the reasons of the under/overestimation in Figure 5-7 can be found in the shipwakes and in the estimations of the unmeasured regions (the bottom, top and edge estimations). An ADCP cannot measure a complete cross section. Near the banks, near the bottom and near the water surface, no measurements can be executed and the discharges in these unmeasured areas needs to be estimated (see 4.2.4.1).

The errors caused by estimations is minimized during these measurements to use a good vessel setup and appropriate ADCP. Compared to former campaigns, the effect of the top, bottom and edge estimates seems to be smaller. The uncertainty on the top estimated values is decreased since the transducer depth of the ADCP was reduced from 2.6 meter to 0.5 or 1 meter.

The uncertainty on the bottom estimated values for the measurements of 17/11/2005, 22/03/2006, 19/06/2008, 26/06/2008, 24/09/200 and 30/09/2008 was twice as big because of the beam angle of the used ADCP. In these measurements, the beam angle of the ADCP was 30°, therefore, the area near the bottom that is not be measured is 12% (see 4.2.4.1). During the other measurements, including this measurement, the ADCP had a beam angle of 20°, which implements a much smaller unmeasured area of 6%.

Compared to the first measurement campaigns the effect of estimations caused by interpolating between 2 successive transects is now minimized because the latest measurements were executed at a higher frequency, 5 to 6 measurements per hour, than the first measurements (2 measurements per hour).

As a conclusion, it appears that the water balance fit quite well (Figure 5-7). The main cause for the unbalanced balance is the uncertainty/accuracy of the estimations and the fact that the total exchanged volume of water at the entrance of DGD is approximately five times bigger than the known resulting volume entering and leaving the dock, i.e. the tidal volume.

Table 5-6: Water volumes during ebb, flood and total measurement campaign, including theoretical expected volumes.

Measurement Day		17/11/2005	22/03/2006	27/09/2006	24/10/2007	11/03/2008	19/06/2008
DGD surface area [10 ³ m ²]		750	750	750	1 019	1019	1 019
Tidal coefficient		1.1	0.97	1.03	1.02	1.17	1.15
Duration of measurement [hh:mm]		10:57	12:52	12:42	12:24	12:23	12:32
Daily fresh water discharge at Schelle [m ³ /s]		91	94	33	46	286	93
Ebb	exchanged volume [10 ³ m ³]	34 137	33 831	33 339	23 298	30 605	29 863
	incoming volume [10 ³ m ³]	18 436	14 716	14 974	8 579	10 263	10 501
	outgoing volume [10 ³ m ³]	15 701	19 115	18 365	14 718	20 342	19 361
	residual outgoing volume [10 ³ m ³]	-2 736	4 399	3 391	6 139	10 062	8 860
	residual tidal emptying = theoretical residual outgoing volume	2 485	3 758	4 227	5 479	5 957	5 456
	overestimated outgoing volume [10 ³ m ³]	-5 221	641	-836	660	4 105	3 404
Flood	exchanged volume [10 ³ m ³]	24 304	28 058	24 939	19 612	22 983	26 369
	incoming volume [10 ³ m ³]	12 565	14 965	14 236	10 590	14 477	14 602
	outgoing volume [10 ³ m ³]	11 740	13 093	10 703	9 022	8 506	11 766
	residual incoming volume [10 ³ m ³]	825	1 872	3 533	1 568	5 966	2 836
	residual tidal filling = theoretical residual incoming volume	3 370	3 261	3 914	5 134	5 941	5 391
	overestimated incoming volume [10 ³ m ³]	-2 545	-1 389	-381	-3 565	25	-2 555
Total	exchanged volume [10 ³ m ³]	58 441	61 889	58 278	42 909	53 589	56 231
	incoming volume [10 ³ m ³]	31 001	29 681	29 210	19 169	24 740	25 104
	outgoing volume [10 ³ m ³]	27 440	32 208	29 067	23 740	28 848	31 127
	residual outgoing volume [10 ³ m ³]	-3 561	2 527	-143	4 571	4 096	6 024
	residual tidal emptying = theoretical residual outgoing volume	-885	497	313	345	16	65
	overestimated outgoing volume [10 ³ m ³]	-2 676	2 030	-456	4 225	4 080	5 958

The durations are based on ADCP measurement. Tidal data of gauge Liefkenshoek was used.

Measurement Day		26/06/2008	24/09/2008	29/09/2008	02/12/2008	10/12/2008	06/03/2009
DGD surface area [10 ³ m ²]		1 019	1 019	1 019	1 019	1 019	1 019
Tidal coefficient		0.97	0.81	1.08	0.98	0.97	0.82
Duration of measurement [hh:mm]		12:20	12:38	12:49	12:19	12:38	12:47
Daily fresh water discharge at Schelle [m ³ /s]		69	75	82	154	222	99
Ebb	exchanged volume [10 ³ m ³]	25 668	25 792	32 790	36 716	33 823	26 728
	incoming volume [10 ³ m ³]	8 246	9 556	10 949	14 954	14 466	9 940
	outgoing volume [10 ³ m ³]	17 422	16 236	21 840	21 762	19 358	16 788
	residual outgoing volume [10 ³ m ³]	9 176	6 680	10 891	6 808	4 892	6 847
	residual tidal emptying = theoretical residual outgoing volume	4 805	4 100	6 209	5 225	5 166	4 339
	overestimated outgoing volume [10 ³ m ³]	4 371	2 580	4 682	1 582	-274	2 508
Flood	exchanged volume [10 ³ m ³]	24 110	26 619	25 216	33 853	33 660	26 076
	incoming volume [10 ³ m ³]	11 818	14 616	14 186	20 099	19 741	15 476
	outgoing volume [10 ³ m ³]	12 292	12 004	11 029	13 754	13 919	10 599
	residual incoming volume [10 ³ m ³]	474	2 612	3 157	6 345	5 822	4 877
	residual tidal filling = theoretical residual incoming volume	5 211	3 620	5 768	5 090	4 950	3 860
	overestimated incoming volume [10 ³ m ³]	-4 737	-1 008	-2 611	1 255	871	1 016
Total	exchanged volume [10 ³ m ³]	49 778	52 412	58 005	70 569	67 483	52 804
	incoming volume [10 ³ m ³]	20 064	24 172	25 136	35 053	34 207	25 417
	outgoing volume [10 ³ m ³]	29 714	28 240	32 870	35 516	33 277	27 387
	residual outgoing volume [10 ³ m ³]	9 650	4 068	7 734	463	-930	1 971
	residual tidal emptying = theoretical residual outgoing volume	-406	480	441	135	216	479
	overestimated outgoing volume [10 ³ m ³]	10 056	3 588	7 293	328	-1 146	1 492

The durations are based on ADCP measurement. Tidal data of gauge Liefkenshoek was used.

Measurement Day		12/03/2009	06/10/2011	13/10/2011
DGD surface area [10 ³ m ²]		1 019	1 019	1 019
Tidal coefficient		1.24	0.83	1.06
Duration of measurement [hh:mm]		12:10	12:33	12:37
Daily fresh water discharge at Schelle [m ³ /s]		129	55	60
Ebb	exchanged volume [10 ³ m ³]	29 457	35 758	38 867
	incoming volume [10 ³ m ³]	12 387	15 903	15 902
	outgoing volume [10 ³ m ³]	17 070	19 855	22 965
	residual outgoing volume [10 ³ m ³]	4 683	3 949	7 062
	residual tidal emptying = theoretical residual outgoing volume	4 742	4 151	5 966
	overestimated outgoing volume [10 ³ m ³]	-59	-202	1 096
Flood	exchanged volume [10 ³ m ³]	26 279	29 628	27 160
	incoming volume [10 ³ m ³]	16 434	17 393	16 427
	outgoing volume [10 ³ m ³]	9 844	12 235	10 732
	residual incoming volume [10 ³ m ³]	6 590	5 158	5 695
	residual tidal filling = theoretical residual incoming volume	6 626	4 246	5 500
	overestimated incoming volume [10 ³ m ³]	-36	912	194
Total	exchanged volume [10 ³ m ³]	55 736	65 389	66 027
	incoming volume [10 ³ m ³]	28 821	33 299	32 330
	outgoing volume [10 ³ m ³]	26 914	32 090	33 697
	residual outgoing volume [10 ³ m ³]	-1 907	-1 209	1 367
	residual tidal emptying = theoretical residual outgoing volume	-1 884	95	465
	overestimated outgoing volume [10 ³ m ³]	-23	-1 114	902

5.2.4 Sediment balance

The mass of the suspended sediment, crossing dock's entrance during flood or ebb on a measurement day, was calculated on a similar manner as the volume.

From Figure 5-8 it can be concluded that the residual sediment flux is less than a third of the total sediment exchange at the entrance of Deurganckdok and that incoming and outgoing flux are always in the same order of magnitude. If these two conclusions are considered together one can see that the water balance has to fit before the sediment balance can be acceptable. An underestimation of outgoing discharge will always lead to an overestimation of the incoming sediment mass and vice versa.

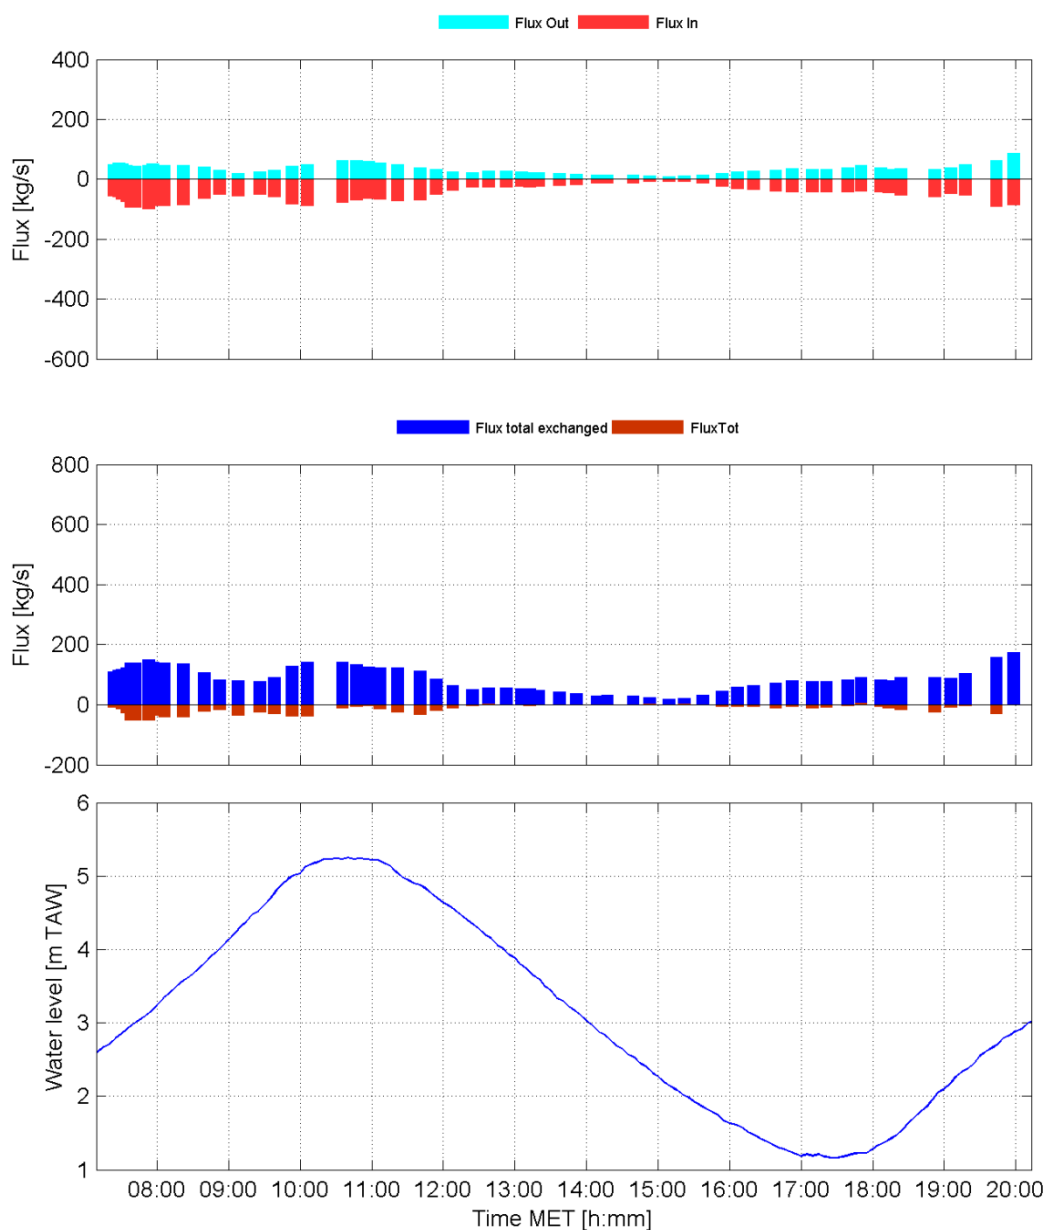


Figure 5-8: The sediment flux at the entrance of Deurganckdok on 06/10/2011 (negative values represent incoming sediment). Top: Total incoming (flux in) and outgoing sediment flux (flux out); Central: total sediment exchange versus total sediment flux; below: tidal curve

As the error in water discharge is known (difference between total residual discharge and discharge due to tidal filling of the dock), one can try to correct discharges in order to calculate a more realistic sediment deposition in DGD over a tidal cycle. For the correction of the total discharge the following methods were used; in the first worst case the total incoming measured discharge was retained and the total outgoing discharge was raised with 1.1 million m^3 , in the second worst case the total outgoing discharge was retained and the total incoming discharge was reduced with 1.1 million m^3 . Between this range the sediment mass will be situated. The settled sediment mass, calculated with corrected discharges, was estimated between 590 and 640 tonnes over the measurement cycle on 6/10/2011 (Table 5-7). During ebb approximately 1500 tonnes of sediment passed the entrance of which about 180 tonnes stayed in the dock; during flood approximately 2300 tonnes passed the entrance of which about 440 tonnes stayed in the dock.

Figure 5-9 shows the relation between the amount of suspended sediments passing in the river Scheldt and the amount of sedimentation in the dock. Sediment data is obtained from the long term measurements at buoy 97 and buoy 84 (IMDC 2005l, 2006l, 2006p, 2007b, 2008p, 2008aa, 2009m, 2011, 2012). Since summer 2008, buoy97 is removed and the concentrations are only averaged between top and bottom of buoy84.

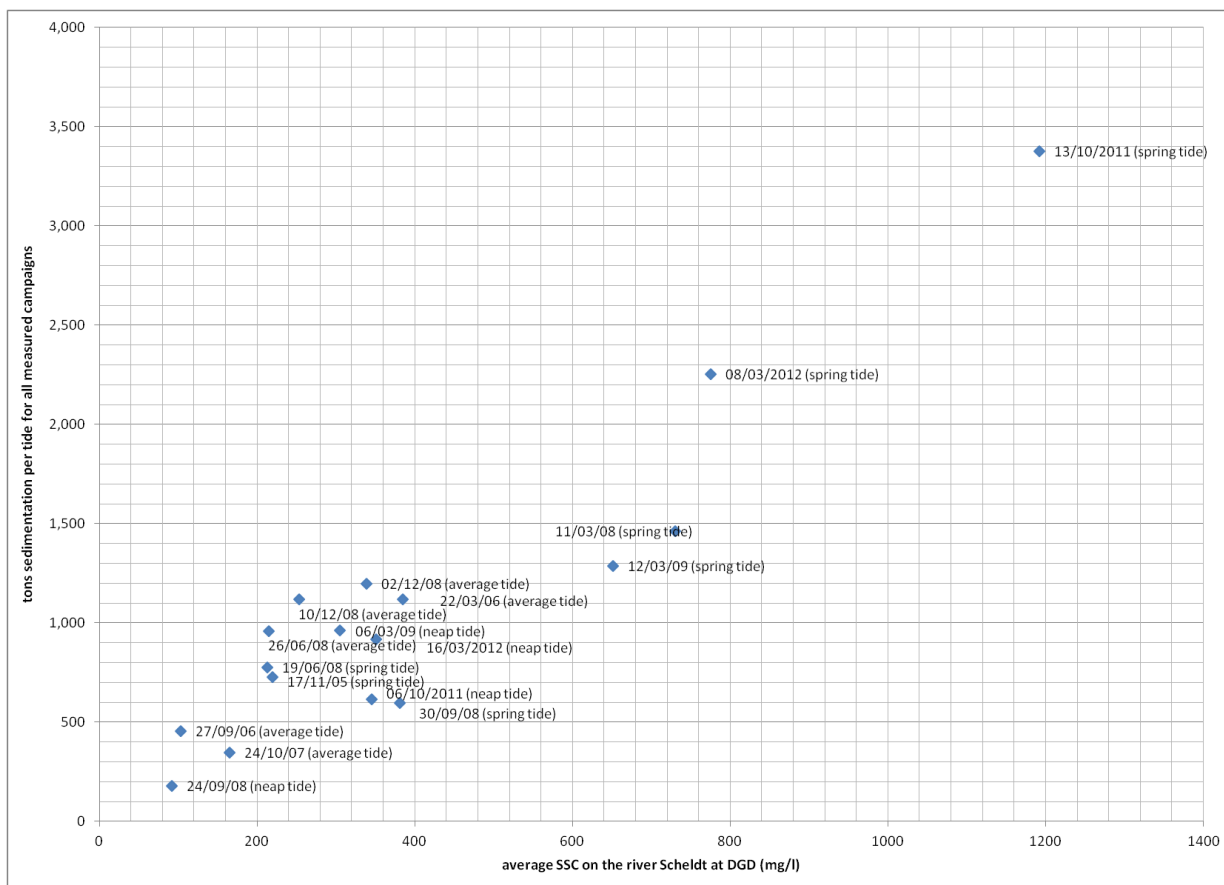


Figure 5-9 Overview of measured sediment deposition in Deurganckdock per tide by means of Sediview technique

In comparison to model results from the empirical model described in IMDC (2008s) and former measurement campaigns without CDW at transect DGD, this resulting deposition of 620 tonnes during neap tide is rather moderated. The model results from the empirical model

described in IMDC (2008s) without CDW show net siltation rates from 400-800 tonnes per neap tide and 700-2000 tonnes spring tide, with a yearly average of 1000 tonnes per tide. Based on numerical model simulation is expected that the siltation rates with CDW will reduce between 10% and 20%. The effect of the dredged sill at entrance will increase the siltation rate with 8% (IMDC, 2011d).

*Table 5-7 Range of sediment deposition during ebb, flood and measurement campaign, calculated with forced fitting water balances for those days.
The duration is based on ADCP measurements.*

Measurement Day		17/11/2005		22/03/2006		27/09/2006		24/10/2007	
DGD surface area [10 ³ m ²]		750		750		750		1 019	
Tidal coefficient		1.1		0.97		1.03		1.02	
Duration of measurement [hh:mm]		10:57		12:52		12:42		12:24	
Daily fresh water discharge at Schelle [m ³ /s]		91		94		33		46	
Ebb	exchanged mass [ton]	1 704	2 367	1 780	1 867	1 056	1 090	620	585
	incoming mass [ton]	1 087	1 489	1 160	1 218	635	656	336	317
	outgoing mass [ton]	617	879	620	650	421	434	284	268
	residual incoming mass [ton]	471	610	540	568	214	223	52	49
Flood	exchanged mass [ton]	1 805	1 498	2 092	2 329	684	664	1 015	714
	incoming mass [ton]	1 000	841	1 320	1 459	463	448	662	501
	outgoing mass [ton]	805	657	773	870	221	215	353	213
	residual incoming mass [ton]	194	184	547	589	242	233	308	288
Total	exchanged mass [ton]	3 509	3 866	3 873	4 196	1 740	1 754	1 635	1 299
	incoming mass [ton]	2 087	2 330	2 480	2 677	1 098	1 105	998	818
	outgoing mass [ton]	1 422	1 536	1 393	1 519	642	649	637	481
	residual incoming mass [ton]	665	794	1 087	1 158	456	456	360	336

Measurement Day		11/03/2008		19/06/2008		26/06/2008		24/09/2008	
DGD surface area [10 ³ m ²]		1 019		1 019		1 019		1 019	
Tidal coefficient		1.17		1.15		0.97		0.81	
Duration of measurement [hh:mm]		12:23		12:32		12:20		12:38	
Daily fresh water discharge at Schelle [m ³ /s]		286		93		69		75	
Ebb	exchanged mass [ton]	2 589	3 642	1 088	1 376	1 041	1 471	702	674
	incoming mass [ton]	1 388	1 990	669	865	695	1 008	402	316
	outgoing mass [ton]	1 201	1 652	419	510	346	463	299	358
	residual incoming mass [ton]	187	338	250	355	349	545	17	45
Flood	exchanged mass [ton]	2 928	2 956	1 710	2 039	1 173	1 884	993	991
	incoming mass [ton]	2 058	2 087	1 088	1 263	815	1 227	590	550
	outgoing mass [ton]	870	869	622	777	358	657	403	441
	residual incoming mass [ton]	1 188	1 218	465	486	457	569	147	149
Total	exchanged mass [ton]	5 517	6 598	2 798	3 415	2 214	3 356	1 695	1 666
	incoming mass [ton]	3 446	4 077	1 757	2 128	1 510	2 235	993	867
	outgoing mass [ton]	2 071	2 521	1 041	1 287	704	1 121	703	799
	residual incoming mass [ton]	1 375	1 556	716	841	806	1 114	164	194

Measurement Day		30/09/2008		02/12/2008		10/12/2008		6/03/2009	
DGD surface area [10 ³ m ²]		1 019		1 019		1 019		1 019	
Tidal coefficient		1.08		0.98		0.97		0.82	
Duration of measurement [hh:mm]		12:49		12:19		12:38		12:47	
Daily fresh water discharge at Schelle [m ³ /s]		82		154		222		99	
Ebb	exchanged mass [ton]	915	1 205	3 119	2 929	1 927	2 003	1 373	1 205
	incoming mass [ton]	559	769	1 854	1 724	1 144	1 194	847	745
	outgoing mass [ton]	356	436	1 265	1 205	783	809	526	461
	residual incoming mass [ton]	202	332	589	519	361	385	321	284
Flood	exchanged mass [ton]	1 135	1 342	4 152	4 500	3 402	3 573	1 736	1 927
	incoming mass [ton]	727	843	2 398	2 574	2 073	2 163	1 195	1 296
	outgoing mass [ton]	408	499	1 754	1 926	1 330	1 410	541	631
	residual incoming mass [ton]	319	345	645	648	743	753	655	665
Total	exchanged mass [ton]	2 050	2 547	7 270	7 429	5 329	5 577	3 109	3 132
	incoming mass [ton]	1 286	1 612	4 252	4 298	3 217	3 357	2 042	2 040
	outgoing mass [ton]	765	935	3 018	3 131	2 113	2 219	1 067	1 092
	residual incoming mass [ton]	521	677	1 233	1 167	1 104	1 138	975	948

Measurement Day		12/03/2009		06/10/2011		13/10/2011	
DGD surface area [10 ³ m ²]		1 019		1 019		1 019	
Tidal coefficient		1.24		0.83		1.06	
Duration of measurement [hh:mm]		11:09		12:33		12:37	
Daily fresh water discharge at Schelle [m ³ /s]		129		55		60	
Ebb	exchanged mass [ton]	2 727	2 669	1 489	1 509	6 334	5 853
	incoming mass [ton]	1 439	1 404	834	847	4 002	3 654
	outgoing mass [ton]	1 288	1 266	655	662	2 332	2 199
	residual incoming mass [ton]	150	138	179	185	1 670	1 455
Flood	exchanged mass [ton]	3 253	3 531	2 268	2 446	6 578	6 644
	incoming mass [ton]	2 189	2 346	1 366	1 426	4 220	4 206
	outgoing mass [ton]	1 064	1 185	902	1 020	2 358	2 438
	residual incoming mass [ton]	1 125	1 161	464	406	1 862	1 769
Total	exchanged mass [ton]	5 980	6 201	3 757	3 954	12 912	12 497
	incoming mass [ton]	3 628	3 750	2 200	2 273	8 222	7 860
	outgoing mass [ton]	2 352	2 451	1 557	1 682	4 690	4 637
	residual incoming mass [ton]	1 276	1 299	643	591	3 532	3 224

6. REFERENCES

AMT (2003). Intern rapport, Getij-informatie Scheldebekken 1991-2000.

AWZ (2000): Baggerwerken 2000, Westerschelde en Zeeschelde.

Flanders Hydraulics Research (2009). MONEOS – jaarboek monitoring WL 2008: Overzicht monitoring hydrodynamiek en fysische parameters zoals door WL in 2008 in het Zeescheldebekken gemeten. Versie 4_0. WL rapporten, Projectnr 833_07.

IMDC (2002). Studie Densiteitsstroming in het kader van LTV Schelde, Stroom- en saliniteitsmeting t.h.v. Deurganckdok uitgevoerd op 12/06/2002, I/RA/11216/02.042/CMA.

IMDC (2005a). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 1: Test survey 17/02/2005, I/RA/11265/05.008/MSA.

IMDC (2005b). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.1: Deurganckdok 17/02/2005, I/RA/11265/05.009/MSA.

IMDC (2005c). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.2: Zandvliet 17/02/2005, I/RA/11265/05.010/MSA.

IMDC (2005d). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.3: Liefkenshoek 17/02/2005, I/RA/11265/05.0011/MSA.

IMDC (2005e). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.4: Schelle 17/02/2005, I/RA/11265/05.0012/MSA.

IMDC (2005f). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.5: Deurganckdok 16/02/2005, I/RA/11265/05.013/MSA.

IMDC (2005g). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.6: Kallosluis 18/02/2005, I/RA/11265/05.014/MSA.

IMDC (2005h). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.7: Near bed continuous monitoring: february 2005, I/RA/11265/05.015/MSA.

IMDC (2005i). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 3: Settling velocity INSSEV february 2005, I/RA/11265/05.016/MSA.

IMDC (2005j). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 4: Cohesive sediment properties february 2005, I/RA/11265/05.017/MSA

IMDC (2005k). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 5.1:

Overview of ambient conditions in the river Scheldt January-June 2005, I/RA/11265/05.018/MSA.

IMDC (2005l). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 5.2: Overview of ambient conditions in the river Scheldt July-December 2005, I/RA/11265/05.019/MSA.

IMDC (2006a) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 6.1 Calibration Winter 15 March & 14 April 2006? I/RA/11291/06.092/MSA.

IMDC (2006b) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 7.1 21 March 2006 Scheldewacht – Deurganckdok, I/RA/11291/06.094/MSA.

IMDC (2006c) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 7.2 22 March 2006 Parel 2 – Deurganckdok (downstream), I/RA/11291/06.095/MSA.

IMDC (2006d) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 7.3 22 March 2006 Laure Marie – Liefkenshoek, I/RA/11291/06.096/MSA.

IMDC (2006e) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 7.4 23 March 2006 Parel 2 – Schelle, I/RA/11291/06.097/MSA.

IMDC (2006f) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 7.5 23 March 2006 Laure Marie – Deurganckdok (downstream), I/RA/11291/06.098/MSA.

IMDC (2006g) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 7.6 23 March 2006 Veremans – Waarde, I/RA/11291/06.099/MSA.

IMDC (2006h) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.1 Opmeting stroming en zout- en sedimentbeweging aan de ingang van het Deurganckdok (SiltProfiler), I/RA/11283/06.087/WGO.

IMDC (2006i) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.3. Opmeting stroming en zout-en sedimentbeweging aan de ingang van het Deurganckdok (ADCP), I/RA/11283/06.110/BDC

IMDC (2006j). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 8.1: Vaste meetopstelling in zake bodemgedrag, I/RA/11291/06.100/MSA.

IMDC (2006k) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.6 Zout en slibverdeling Deurganckdok 17/03/2006 – 23/05/2006, I/RA/11283/06.121/MSA.

IMDC (2006l) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 5.3 Overview

of ambient conditions in the river Scheldt – January-June 2006 (I/RA/11291/06.089/MSA), in opdracht van AWZ.

IMDC (2006m): Studie van de stromingsvelden en sedimentuitwisseling aan de ingang van Deurganckdok. Current and Sediment flux measurements November 17th 2005 (I/RA/15030/06.021/BDC).

IMDC(2006n): Studie van de stromingsvelden en sedimentuitwisseling aan de ingang van Deurganckdok. Additional processing of ADCP and salinity data 17/11/2005 and 28/11/2005 (I/RA/15030/06.040/BDC).

IMDC (2006o). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 9: Valsnelheid slib – INSSEV, I/RA/11291/06.102/MSA, in opdracht van AWZ.

IMDC (2006p). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 2.7: Silt distribution and frame measurements 15/07/2006 – 31/10/2006. (I/RA/11291/06.122/MSA).

IMDC (2006q) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 5.3 Overview of ambient conditions in the river Scheldt – Januari-June 2006 (I/RA/11291/06.089/MSA), in opdracht van AWZ.

IMDC (2006r) Mer verruiming Westerschelde, Nota Bovenafvoer Scheldebekken, I/NO/11282/06.104/FPE.

IMDC (2006s). Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.07 Zout en slibverdeling Deurganckdok 15/07/2006 – 31/10/2006, I/RA/11283/06.122/MSA.

IMDC (2007a) Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 6.2 Summer calibration and Final report, I/RA/11291/06.093/MSA.

IMDC (2007b). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 5.4 Overview of ambient conditions in the river Scheldt – July-December 2006 (I/RA/11291/06.089/MSA), in opdracht van AWZ.

IMDC (2007c). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 11.1 Through tide Measurement Sediview & Siltprofiler 27/9 Stream - Liefkenshoek (I/RA/11291/06.104/MSA), in opdracht van AWZ.

IMDC (2007d). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 11.2 Through tide Measurement Sediview 27/9 Veremans - Raai K (I/RA/11291/06.105/MSA), in opdracht van AWZ.

IMDC (2007e). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 11.3 Through tide Measurement Sediview & Siltprofiler 28/9 Stream - Raai K (I/RA/11291/06.106/MSA), in opdracht van AWZ.

IMDC (2007f). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 11.4 Through tide Measurement Sediview 28/9 Veremans - Waarde(I/RA/11291/06.107/MSA), in opdracht van AWZ.

IMDC (2007g). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 11.5 Through tide Measurement Sediview 28/9 Parel 2 - Schelle (I/RA/11291/06.108/MSA), in opdracht van AWZ.

IMDC (2007h). Uitbreiding studie densiteitsstromingen in de Beneden Zeeschelde in het kader van LTV Meetcampagne naar hooggeconcentreerde slibsuspensies Deelrapport 11.6 Through tide Measurement Salinity Distribution 26/9 Scheldewacht – Deurganckdok in opdracht van AWZ.

IMDC (2007i) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.1 Sediment Balance: Three monthly report 1/4/2006 – 30/06/2006 (I/RA/11283/06.113/MSA)

IMDC (2007j) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.2 Sediment Balance: Three monthly report 1/7/2006 – 30/09/2006 (I/RA/11283/06.114/MSA)

IMDC (2007k) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.3 Sediment Balance: Three monthly report 1/10/2006 – 31/12/2006 (I/RA/11283/06.115/MSA)

IMDC (2007l) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.4 Sediment Balance: Three monthly report 1/1/2007 – 31/03/2007 (I/RA/11283/06.116/MSA)

IMDC (2007m) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.5 Annual Sediment Balance (I/RA/11283/06.117/MSA)

IMDC (2007n) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.2 Through tide measurement SiltProfiler 26/09/2006 Stream (I/RA/11283/06.068/MSA)

IMDC (2007o) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.4 Through tide measurement Sediview spring tide 27/09/2006 Parel 2 (I/RA/11283/06.119/MSA)

IMDC (2007p) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.7 Salt-Silt distribution & Frame Measurements Deurganckdok 15/07/2006 – 31/10/2006 (I/RA/11283/06.122/MSA)

IMDC (2007q) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.8 Salt-Silt distribution & Frame Measurements Deurganckdok 15/01/2007 – 15/03/2007 (I/RA/11283/06.123/MSA)

IMDC (2007r) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.1 Boundary conditions: Three monthly report 1/1/2007 – 31/03/2007 (I/RA/11283/06.127/MSA)

IMDC (2007s) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.10: Sediment Balance: Three monthly report 1/4/2007 – 30/06/2007 (I/RA/11283/07.081/MSA)

IMDC (2007t) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.11: Sediment Balance: Three monthly report 1/7/2007 – 30/09/2007 (I/RA/11283/07.082/MSA)

IMDC (2007v) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.16: Salt-Silt distribution Deurganckdok summer (21/6/2007 – 30/07/2007) (I/RA/11283/07.092/MSA)

IMDC (2007w) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.10: Boundary conditions: Three monthly report 1/04/2007 – 30/06/2007 (I/RA/11283/07.097/MSA)

IMDC (2007u) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.11: Boundary conditions: Two monthly report 1/07/2007 – 30/09/2007 (I/RA/11283/07.098/MSA)

IMDC (2008a) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.5: Through tide measurement Sediview average tide 24/10/2007 (I/RA/11283/06.120/MSA)

IMDC (2008b) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 4.1: Analysis of siltation Processes and Factors (I/RA/11283/06.129/MSA)

IMDC (2008c) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.12: Sediment Balance: Four monthly report 1/9/2007 – 31/12/2007 (I/RA/11283/07.083/MSA)

IMDC (2008d) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.13: Sediment Balance: Four monthly report 1/01/2007 – 31/03/2007 (I/RA/11283/07.084/MSA)

IMDC (2008e) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.14: Annual Sediment Balance. (I/RA/11283/07.085/MSA)

IMDC (2008f) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.09: Calibration stationary equipment autumn (I/RA/11283/07.095/MSA)

IMDC (2008g) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.10: Through tide measurement SiltProfiler 23 October 2007 (I/RA/11283/07.086/MSA)

IMDC (2008h) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.11: Through tide measurement Salinity Profiling winter 12 March 2008 (I/RA/11283/07.087/MSA)

IMDC (2008i) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.12: Through tide measurement Sediview winter 11 March 2008 – Transect I (I/RA/11283/07.088/MSA)

IMDC (2008j) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.13: Through tide measurement Sediview winter 11 March 2008 – Transect K (I/RA/11283/07.089/MSA)

IMDC (2008k) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.14: Through tide measurement Sediview winter 11 March 2008 – Transect DGD (I/RA/11283/07.090/MSA)

IMDC (2008l) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.15: Through tide measurement SiltProfiler winter 12 March 2008 (I/RA/11283/07.091/MSA)

IMDC (2008m) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.17: Salt-Silt distribution & Frame Measurements Deurganckdok autumn (17/9/2007-10/12/2007) (I/RA/11283/07.093/MSA)

IMDC (2008n) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.18: Salt-Silt distribution & Frame Measurements Deurganckdok winter (18/02/2007-31/03/2008) (I/RA/11283/07.094/MSA)

IMDC (2008o) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.19: Calibration stationary & mobile equipment winter (I/RA/11283/07.096/MSA)

IMDC (2008p) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.12: Boundary conditions: Three monthly report 1/9/2007 – 31/12/2007 (I/RA/11283/07.099/MSA)

IMDC (2008q) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.13: Boundary conditions: Three monthly report 1/1/2008 – 31/3/2007 (I/RA/11283/07.100/MSA)

IMDC (2008r) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.14: Boundary conditions: Annual report (I/RA/11283/07.101/MSA)

IMDC (2008s) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 4.10: Analysis of siltation Processes and Factors (I/RA/11283/07.102/MSA)

IMDC (2008t) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.20: Sediment Balance: Three monthly report 1/4/2008 – 30/06/2008 (I/RA/11283/08.076/MSA)

IMDC (2008u) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.20: Through tide measurement Sediview during average tide Spring 2008 – 19 June 2008 (I/RA/11283/08.081/MSA)

IMDC (2008v) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.21: Through tide measurement Sediview during average tide Spring 2008 – 26 June 2008 (I/RA/11283/08.082/MSA)

IMDC (2008w) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.21: Sediment Balance: Three monthly report 1/7/2008 – 30/09/2008 (I/RA/11283/08.077/MSA)

IMDC (2008x) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.22: Through tide measurement Sediview during neap tide Summer 2008 – 24 September 2008 (I/RA/11283/08.083/MSA)

IMDC (2008y) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.28: Through tide measurement ADCP eddy Summer 2008 – 1 October 2008 (I/RA/11283/08.089/MSA)

IMDC (2008z) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.32: Salt-Silt distribution Deurganckdok: six monthly report 1/4/2008 – 30/9/2008 (I/RA/11283/08.093/MSA)

IMDC (2008aa) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.20: Boundary conditions: Six monthly report 1/4/2008 – 30/9/2008 (I/RA/11283/08.096/MSA)

IMDC (2009a) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.23: Through tide measurement Sediview during spring tide Summer 2008 – 30 September 2008 (I/RA/11283/08.084/MSA)

IMDC (2009b) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.29: Through tide measurement SiltProfiler summer 2008 – 29 September 2008 (I/RA/11283/07.090/MSA)

IMDC (2009c) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.34: Calibration stationary & mobile equipment autumn 2008 (I/RA/11283/08.095/MSA)

IMDC (2009d) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.22: Sediment Balance: Three monthly report 1/10/2008 – 31/12/2008 (I/RA/11283/08.078/MSA)

IMDC (2009e) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.24: Through tide measurement Sediview during neap tide Autumn 2008 (I/RA/11283/08.085/MSA)

IMDC (2009f) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.25: Through tide measurement Sediview during spring tide Autumn 2008 (I/RA/11283/08.086/MSA)

IMDC (2009g) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.23: Sediment Balance: Three monthly report 1/01/2009 – 31/03/2009 (I/RA/11283/08.079/MSA)

IMDC (2009h) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 1.24: Annual Sediment Balance (I/RA/11283/08.080/MSA)

IMDC (2009i) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.26: Through tide measurement Sediview during neap tide Winter 2009 (I/RA/11283/08.087/MSA)

IMDC (2009j) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.30: Through tide measurement SiltProfiler winter 2009 (I/RA/11283/08.091/MSA)

IMDC (2009k) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.31: Through tide measurement Salinity Profiling winter 2009 (I/RA/11283/08.092/MSA)

IMDC (2009l) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.33: Salt-Silt distribution Deurganckdok: six monthly report 1/10/2008 – 31/3/2009 (I/RA/11283/08.094/MSA)

IMDC (2009m) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 3.21: Boundary conditions: Six monthly report 1/10/2008 – 31/03/2009 (I/RA/11283/08.097/MSA)

IMDC (2009n) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.27: Through tide measurement Sediview during spring tide Winter 2009 (I/RA/11283/08.088/MSA)

IMDC (2009o) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 4.20: Analysis of siltation Processes and Factors (I/RA/11283/08.098/MSA)

IMDC (2009p) Langdurige metingen Deurganckdok: Opvolging en analyse aanslibbing. Deelrapport 2.35: Salt-Silt distribution Deurganckdok: nine monthly report 1/04/2009 – 31/12/2009 (I/RA/11283/09.085/MSA)

IMDC (2010a) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.5 Through Tide measurement: eddy currents DGD 02/03/2010 (I/RA/11283/10.051/MSA)

IMDC (2010b) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.8 Sal-Silt distribution Deurganckdok 01/04/2009 – 31/03/2010 (I/RA/11354/10.068/NZI)

IMDC (2011a) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 1.1 Annual Sediment Balance year 1: 1/04/2009 – 31/03/2010 (I/RA/11354/10.067/NZI)

IMDC (2011b) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 1.2 Annual Sediment Balance year 2: 1/04/2009 – 31/03/2010 (I/RA/11354/10.100/MBO/ANF)

IMDC (2011c) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 1.4 Boundary Conditions year 1: 01/04/2009 – 31/03/2010 (I/RA/11354/10.102/MBO/ANF)

IMDC (2011d) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 1.7 Synthesis report of research on Current Deflecting Wall (I/RA/11354/10.063/MBO)

IMDC (2012a) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.1 Through Tide Sediview measurement: entrance DGD during spring tide in Autumn 2011 (I/RA/11354/10.106/MBO/ANF)

IMDC (2012b) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.1 Through Tide Sediview measurement: entrance DGD during neap tide in Autumn 2011 (I/RA/11354/10.107/MBO/ANF)

IMDC (2012c) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.5 Through Tide measurement: eddy currents DGD Autumn 2011 (I/RA/11354/10.110/MBO/ANF)

IMDC (2012d) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.10 Salt-Silt & Current Distribution entrance Deurganckdok: Frame measurements and through tide measurements: Autumn 2011 (I/RA/11354/11.131/BQU)

IMDC (2012e) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 2.12 Calibration stationary & mobile equipment 16/03/2011 (I/RA/11354/11.113/MBO/ANF)

IMDC (2012f) Evaluatie externe effecten aanslibbing Deurganckdok. Deelrapport 1.5 Boundary conditions year 2: 01/04/2010 – 31/03/2011 (I/RA/11354/11.103/MBO/ANF)

TV SAM (2006a) Langdurige stationaire ADCP stroommetingen te Oosterweel dukdalf 01/2005-06/2005. 42SR S032PIB 2A.

TV SAM (2006b) Langdurige stationaire ADCP stroommetingen te Oosterweel dukdalf 07/2005-12/2005. 42SR S033PIB 2A.


TV SAM (2006c) Langdurige stationaire ADCP stroommetingen te Oosterweel dukdalf 01/2006-06/2006. 42SR S032PIB 2A.

Unesco (1983). Algorithms for computation of fundamental properties of seawater, UNESCO Technical Papers in Marine Science, 44. UNESCO, France.


WL Delft Hydraulics (2004). Study of density currents in the framework of the LTV for the Scheldt Estuary. Executive summary. H3981-20.

Annex A overview of measurement


A.1 Overview of the measurement locations for the whole HCBS2 and Deurganckdok measurement campaigns

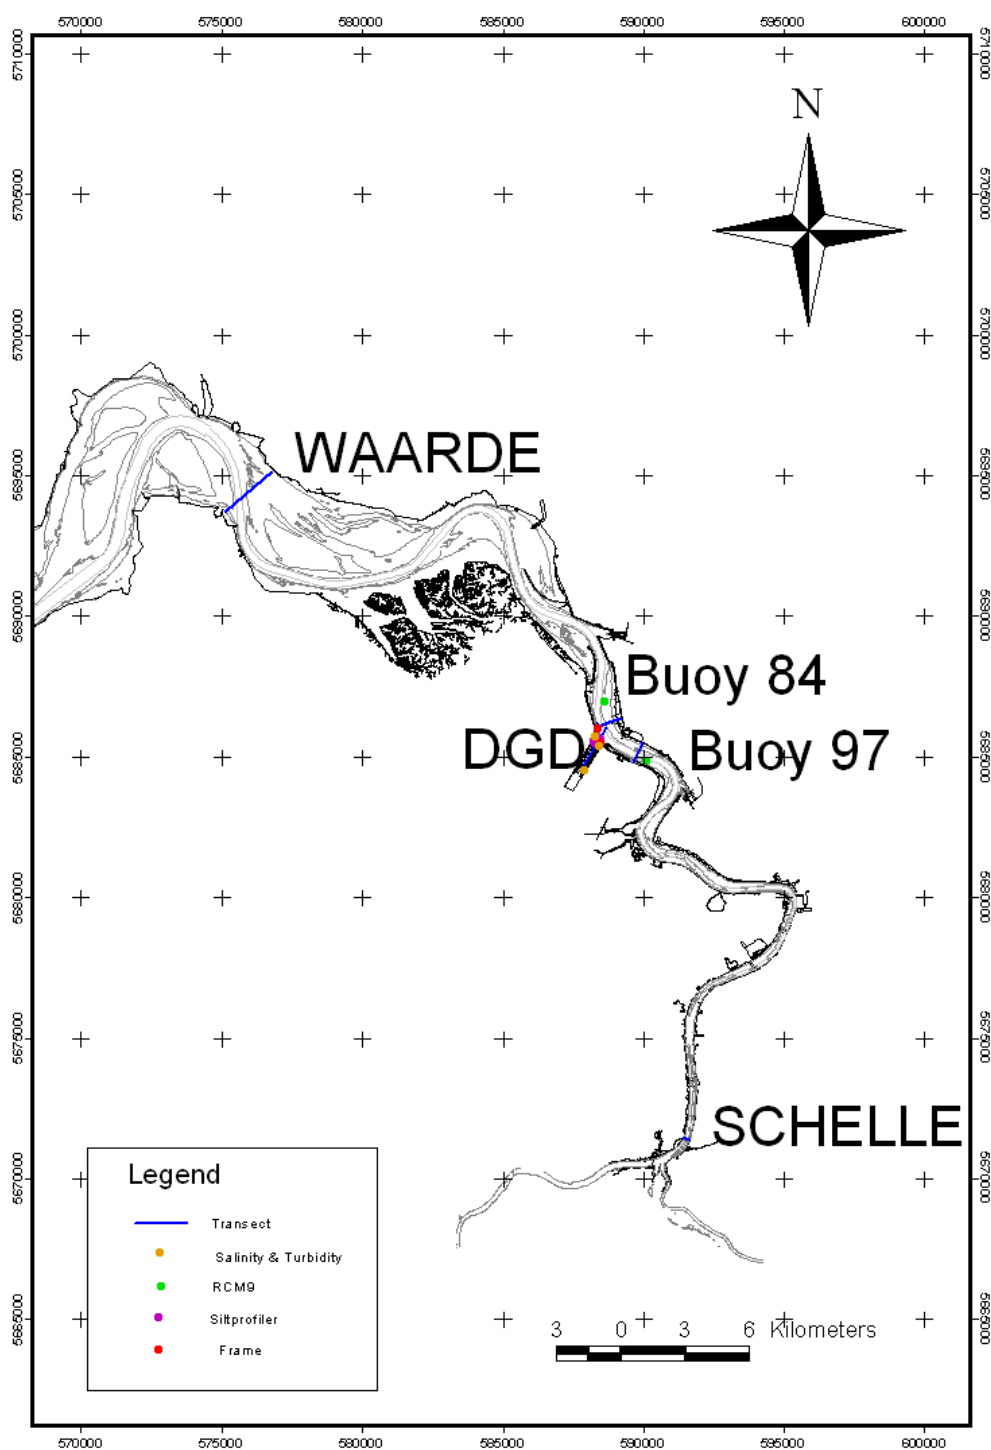


Annex Figure 1: Overview of the measurement locations

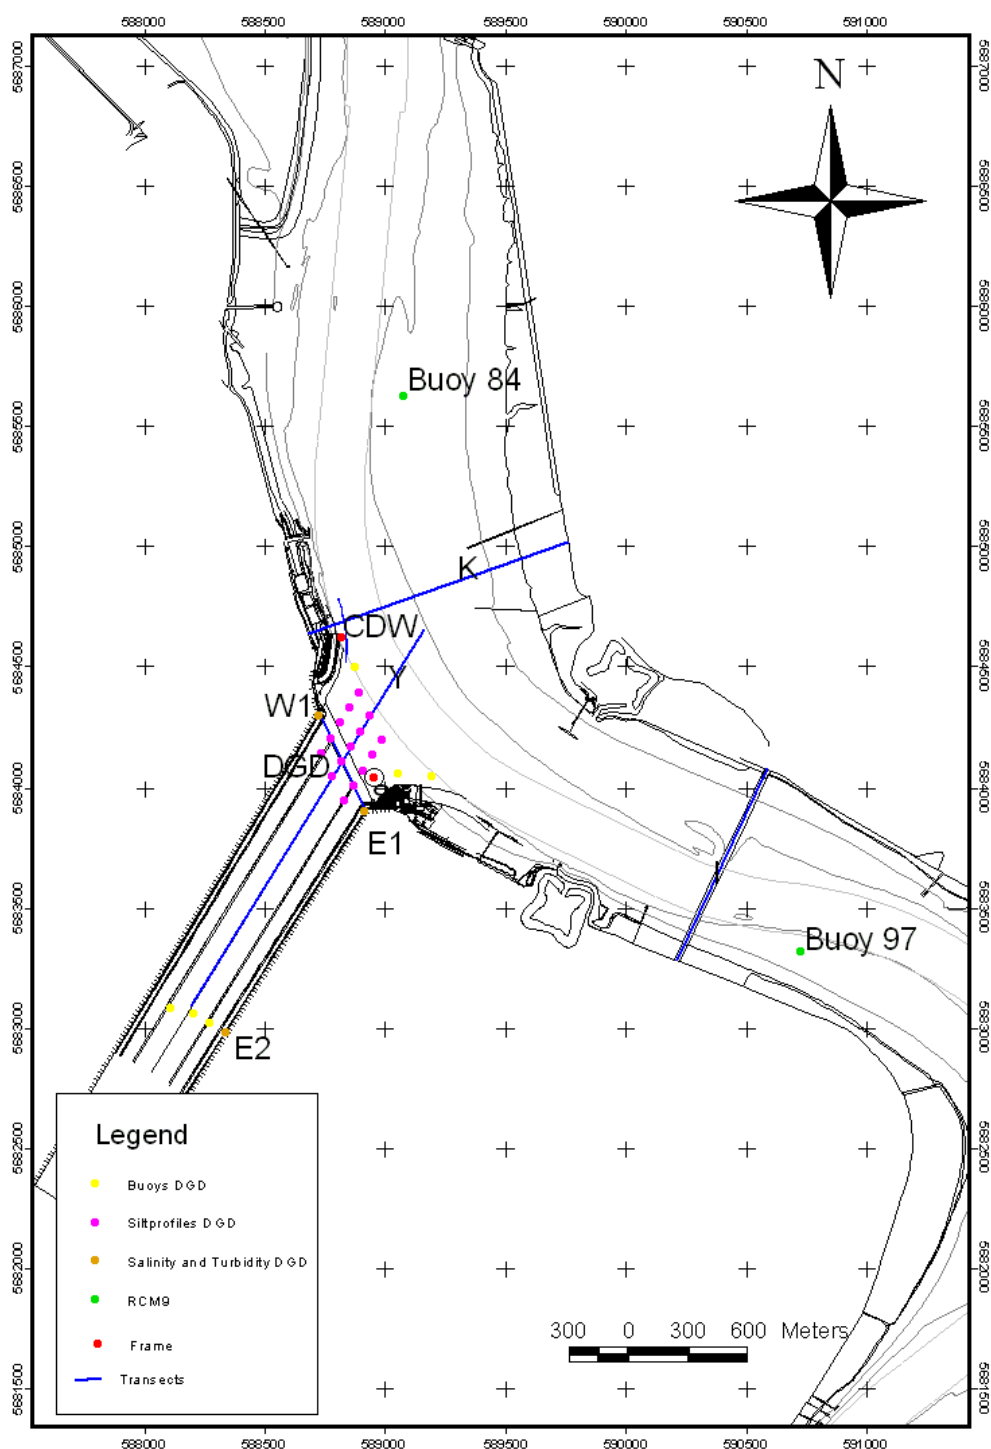

Annex Figure 2: Overview of the measurement locations at Deurganckdok during previous campaigns

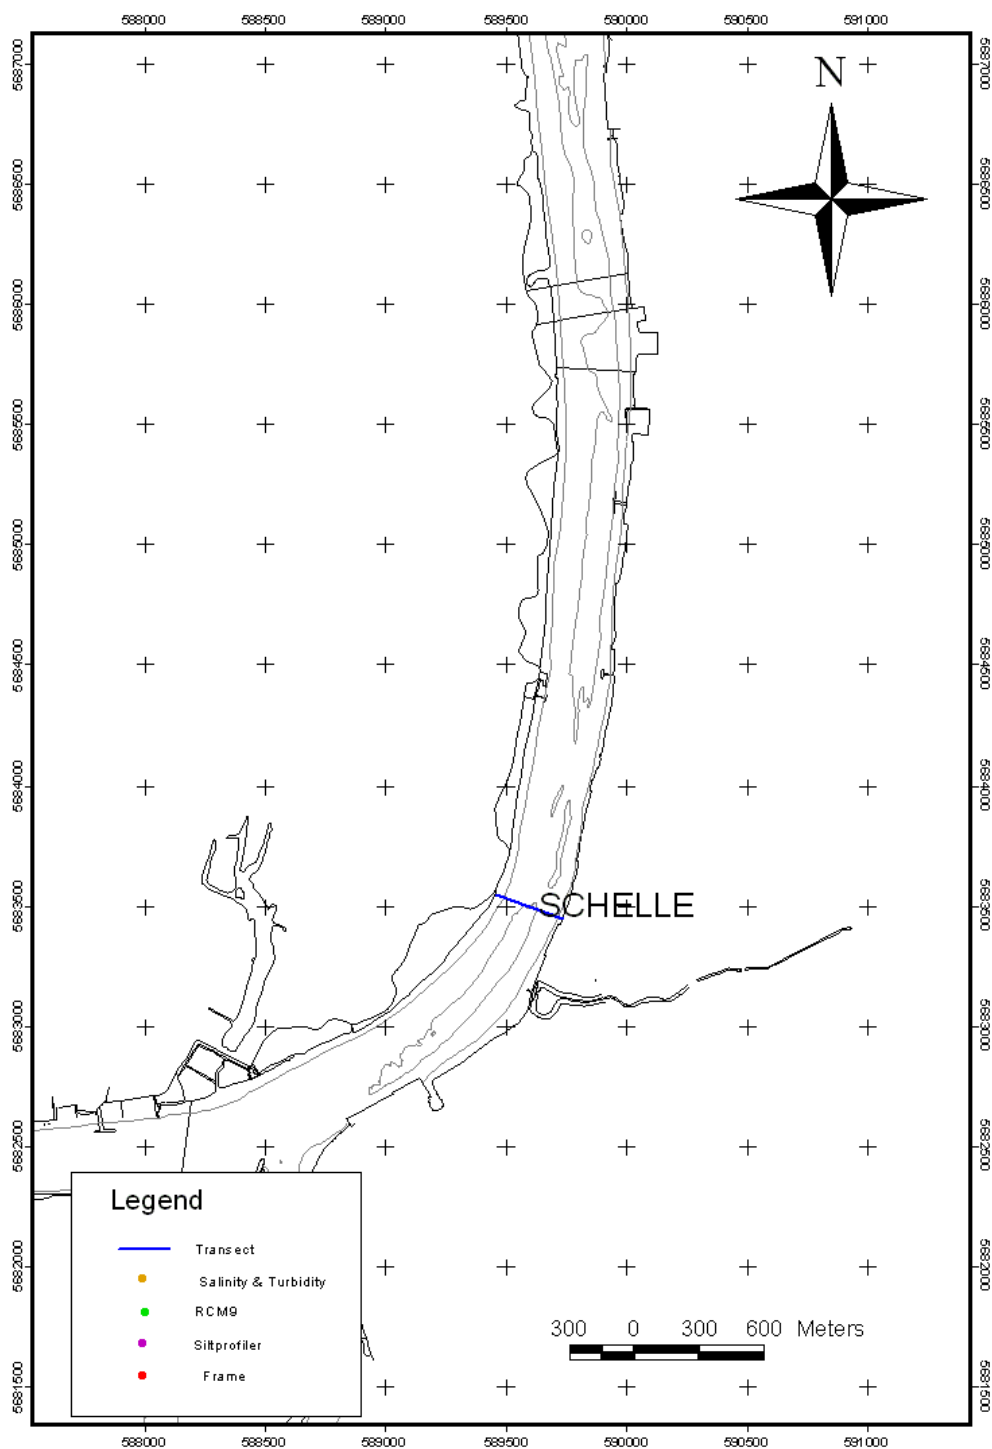

Annex Figure 3: Transect S in Schelle

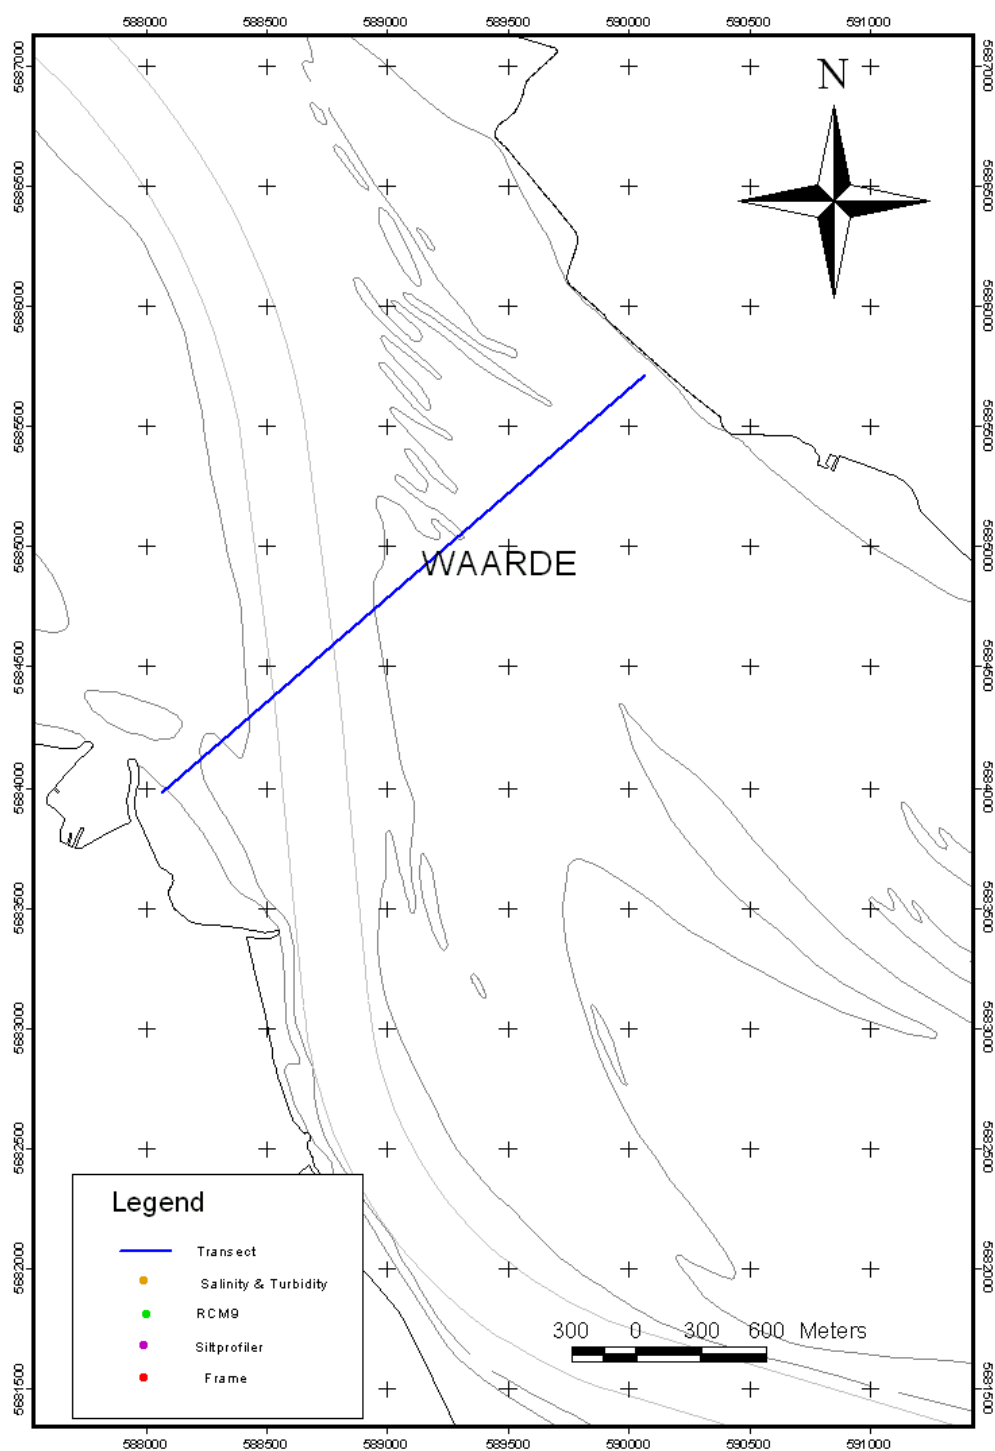

Annex Figure 4: Transect W in Waarde

A.2 Overview of all measurement locations HCBS and Deurganckdok measurement campaigns

Annex Table A-1: coordinates of theoretical transects

<i>Transect</i>	<i>Start Easting</i>	<i>Start Northing</i>	<i>End Easting</i>	<i>End Northing</i>
I	590318.00	5683302.00	590771.00	5684257.00
K	588484.00	5684924.00	589775.00	5685384.00
SCHELLE	592645.07	5665794.06	592952.68	5665682.28
DGD	588764.88	5684056.49	588540.95	5684526.94
Y	589059.09	5684948.36	587898.76	5683076.56
WAARDE	573541.00	5696848.20	571318.00	5694932.90

Annex Table A-2: coordinates of SiltProfiler gauging locations

<i>SP</i>	<i>EASTING</i>	<i>NORTHING</i>
1	588737	5684638
2	588690	5684562
3	588643	5684486
4	588596	5684411
5	588549	5684335
6	588606	5684217
7	588653	5684293
8	588700	5684368
9	588747	5684444
10	588793	5684520
11	588850	5684402
12	588803	5684326
13	588756	5684250
14	588709	5684174
15	588662	5684099


A.3 Measurement overview at DGD on 06/10/2011

<i>FileName</i>	<i>Time [hh:mm MET]</i>	<i>Time after HW [hh:mm]</i>	<i>Easting Left (UTM31 WGS84)</i>	<i>Northing Left (UTM31 WGS84)</i>	<i>Easting Right (UTM31 WGS84)</i>	<i>Northing Right (UTM31 WGS84)</i>	<i>Transect length [m]</i>	<i>Transect heading [°]</i>
5001DGD_sub.csv	7:24	-3:15	588459	5684290	588683	5683881	466	151
5002DGD_sub.csv	7:27	-3:12	588459	5684319	588666	5683869	495	-25
5003DGD_sub.csv	7:30	-3:09	588456	5684301	588658	5683852	492	156
5004DGD_sub.csv	7:34	-3:05	588460	5684319	588664	5683878	486	-25
5005DGD_sub.csv	7:38	-3:01	588452	5684312	588669	5683870	492	154
5006DGD_sub.csv	7:41	-2:58	588459	5684320	588672	5683868	500	-25
5008DGD_sub.csv	7:53	-2:46	588453	5684308	588662	5683875	481	154
5009DGD_sub.csv	7:56	-2:43	588467	5684325	588666	5683886	481	-24
5011DGD_sub.csv	8:06	-2:33	588454	5684317	588673	5683870	498	154
5013DGD_sub.csv	8:21	-2:18	588468	5684317	588677	5683872	492	-25
5015DGD_sub.csv	8:39	-2:00	588456	5684301	588671	5683873	479	153
5017DGD_sub.csv	8:52	-1:47	588509	5684220	588666	5683882	373	-25
5019DGD_sub.csv	9:07	-1:32	588464	5684301	588679	5683884	469	153
5021DGD_sub.csv	9:26	-1:13	588464	5684324	588672	5683870	499	-25
5023DGD_sub.csv	9:38	-1:01	588454	5684310	588671	5683872	488	154
5025DGD_sub.csv	9:53	-0:46	588459	5684322	588671	5683871	498	-25
5027DGD_sub.csv	10:05	-0:34	588451	5684318	588667	5683873	495	154
5029DGD_sub.csv	10:35	-0:04	588461	5684323	588672	5683872	498	-25
5031DGD_sub.csv	10:47	0:07	588455	5684307	588667	5683875	481	154
5033DGD_sub.csv	10:57	0:17	588458	5684322	588680	5683884	490	-27
5035DGD_sub.csv	11:06	0:26	588455	5684319	588657	5683878	485	155
5037DGD_sub.csv	11:21	0:41	588462	5684324	588672	5683872	498	-25
5039DGD_sub.csv	11:40	1:00	588451	5684314	588673	5683872	495	153
5041DGD_sub.csv	11:54	1:14	588470	5684323	588685	5683898	477	-27
5043DGD_sub.csv	12:07	1:27	588456	5684303	588681	5683872	486	152
5045DGD_sub.csv	12:24	1:44	588461	5684320	588670	5683878	490	-25
5047DGD_sub.csv	12:38	1:58	588461	5684301	588671	5683873	476	154
5049DGD_sub.csv	12:52	2:12	588465	5684319	588675	5683868	498	-25

FileName	Time [hh:mm MET]	Time after HW [hh:mm]	Easting Left (UTM31 WGS84)	Northing Left (UTM31 WGS84)	Easting Right (UTM31 WGS84)	Northing Right (UTM31 WGS84)	Transect length [m]	Transect heading [°]
5051DGDGT_sub.csv	13:05	2:25	588557	5684087	588673	5683865	251	152
5052DGDGT_sub.csv	13:12	2:32	588456	5684308	588676	5683868	492	153
5054DGDGT_sub.csv	13:20	2:40	588457	5684320	588664	5683877	490	-25
5056DGDGT_sub.csv	13:37	2:57	588458	5684305	588670	5683873	481	154
5058DGDGT_sub.csv	13:51	3:11	588454	5684318	588674	5683879	492	-27
5060DGDGT_sub.csv	14:09	3:29	588453	5684317	588675	5683866	502	154
5062DGDGT_sub.csv	14:17	3:37	588461	5684322	588677	5683873	499	-26
5064DGDGT_sub.csv	14:39	3:59	588455	5684302	588671	5683863	490	154
5066DGDGT_sub.csv	14:52	4:12	588458	5684316	588667	5683872	491	-25
5068DGDGT_sub.csv	15:09	4:29	588455	5684300	588673	5683871	482	153
5070DGDGT_sub.csv	15:21	4:41	588467	5684323	588671	5683896	473	-26
5072DGDGT_sub.csv	15:37	4:57	588452	5684311	588667	5683876	485	154
5074DGDGT_sub.csv	15:53	5:13	588464	5684321	588660	5683883	480	-24
5076DGDGT_sub.csv	16:06	5:26	588453	5684294	588659	5683863	478	154
5078DGDGT_sub.csv	16:20	5:40	588460	5684321	588668	5683886	483	-26
5080DGDGT_sub.csv	16:38	5:58	588453	5684313	588674	5683863	502	154
5082DGDGT_sub.csv	16:52	6:12	588458	5684314	588670	5683881	483	-26
5084DGDGT_sub.csv	17:09	6:29	588457	5684302	588654	5683890	457	154
5086DGDGT_sub.csv	17:21	6:41	588457	5684318	588672	5683872	496	-26
5088DGDGT_sub.csv	17:38	-5:31	588456	5684307	588663	5683862	491	155
5090DGDGT_sub.csv	17:50	-5:19	588460	5684303	588666	5683874	476	-26
5092DGDGT_sub.csv	18:06	-3:05	588454	5684307	588662	5683862	491	155
5094DGDGT_sub.csv	18:13	-4:56	588456	5684316	588659	5683873	487	-25
5096DGDGT_sub.csv	18:23	-4:46	588451	5684314	588652	5683873	485	156
5098DGDGT_sub.csv	18:52	-4:17	588453	5684310	588673	5683862	499	-26
5100DGDGT_sub.csv	19:05	-4:04	588460	5684303	588654	5683857	486	156
5102DGDGT_sub.csv	19:17	-3:52	588467	5684282	588667	5683871	458	-26
5104DGDGT_sub.csv	19:43	-3:26	588475	5684270	588642	5683844	458	159
5106DGDGT_sub.csv	19:58	-3:12	588457	5684320	588671	5683862	506	-25


Annex B Tidal and discharge data

B.1 Tidal data

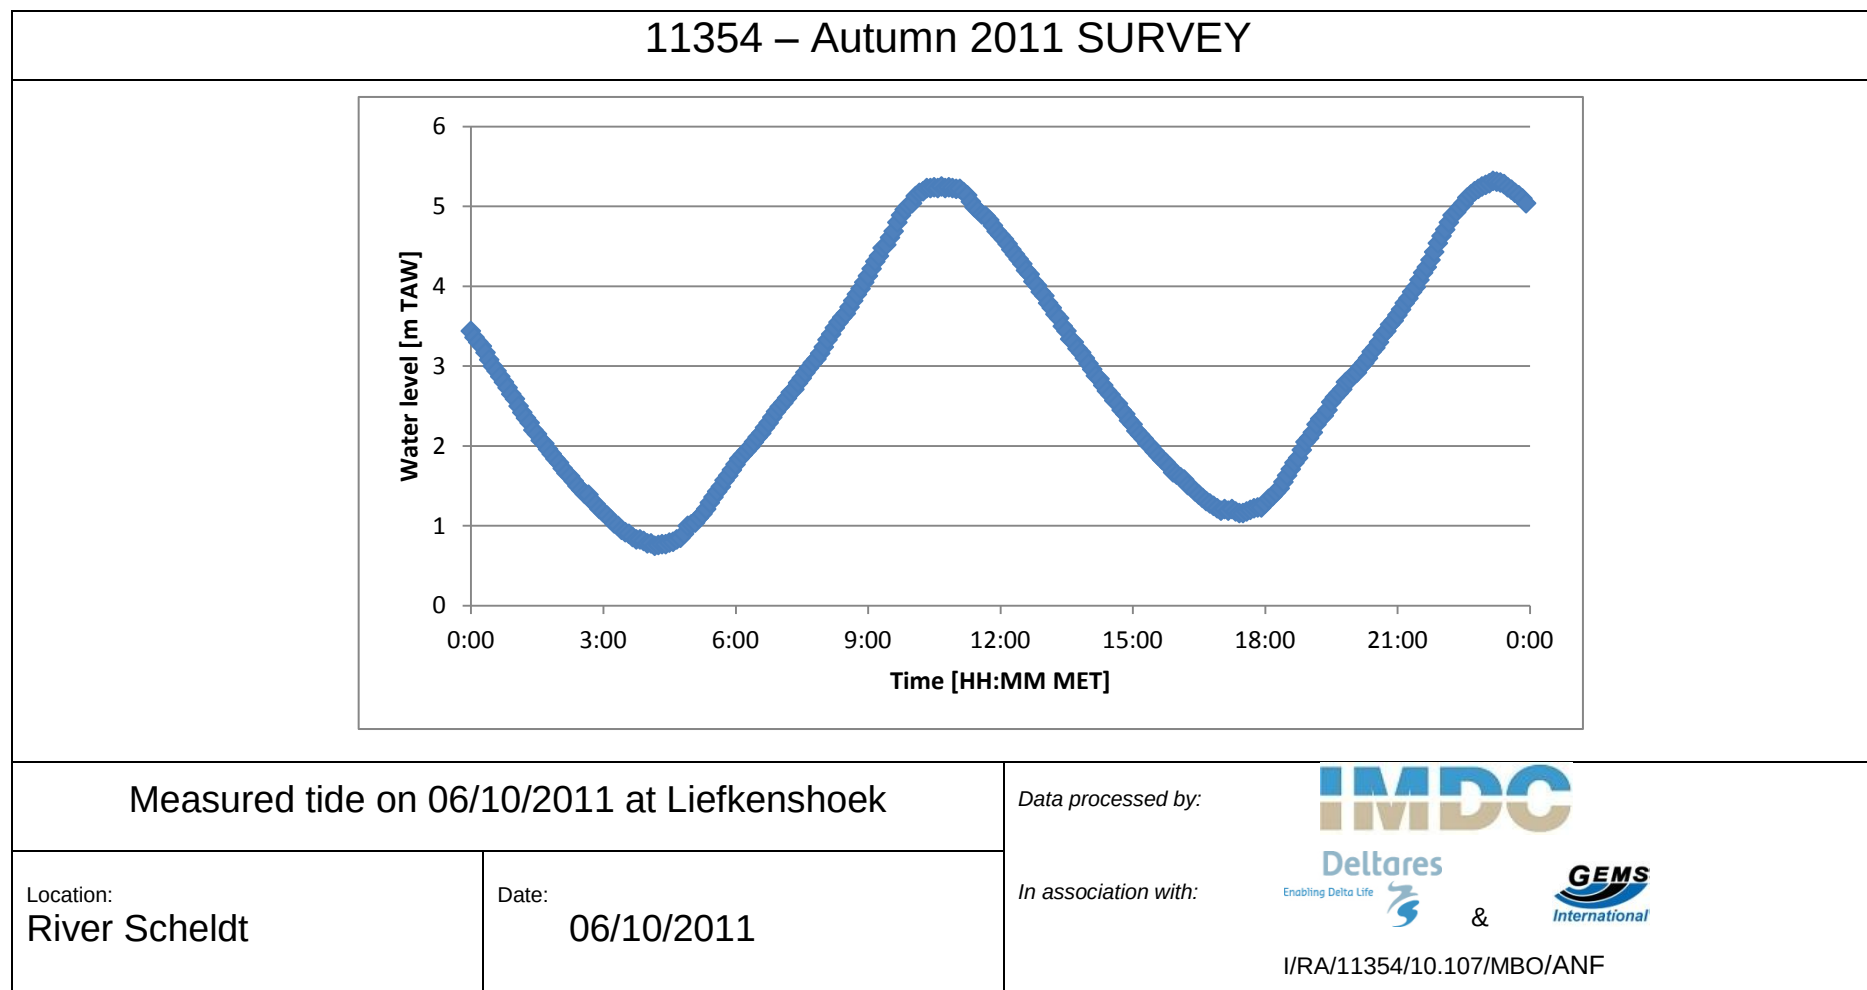


Annex Figure 5: Measured tide in MET on 6 October 2011 at Liefkenshoek

B.2 Discharge data

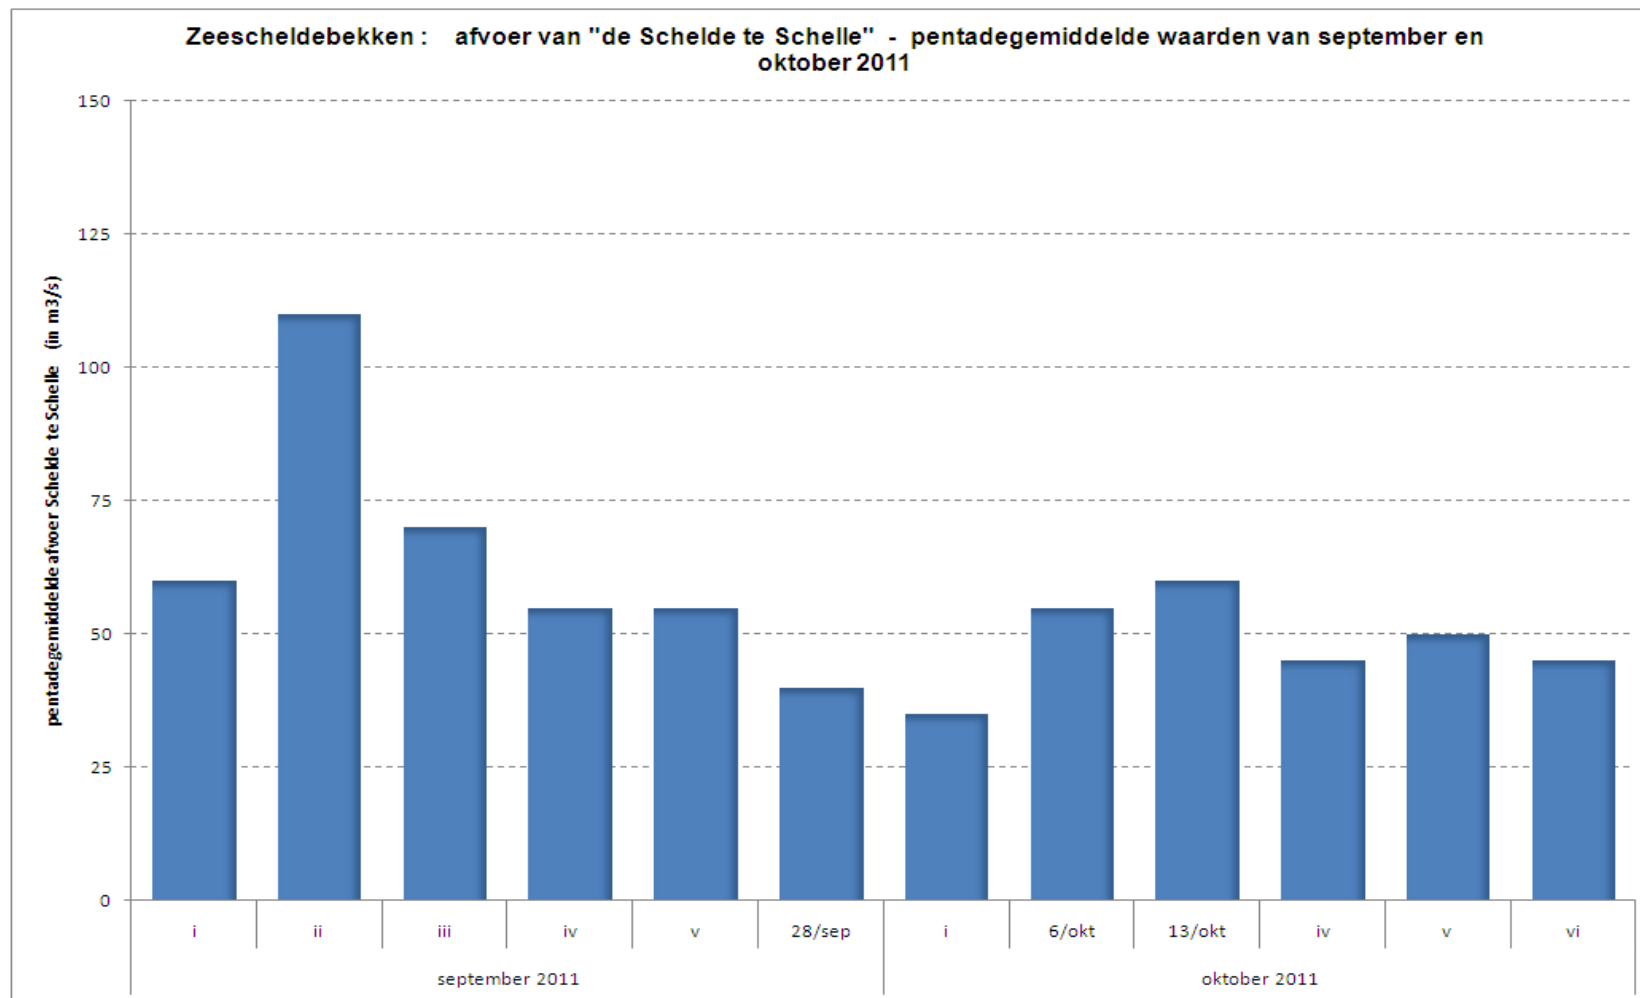

Annex Figure 6: Pentade average discharges of the river Scheldt in Schelle of the months September and October 2011

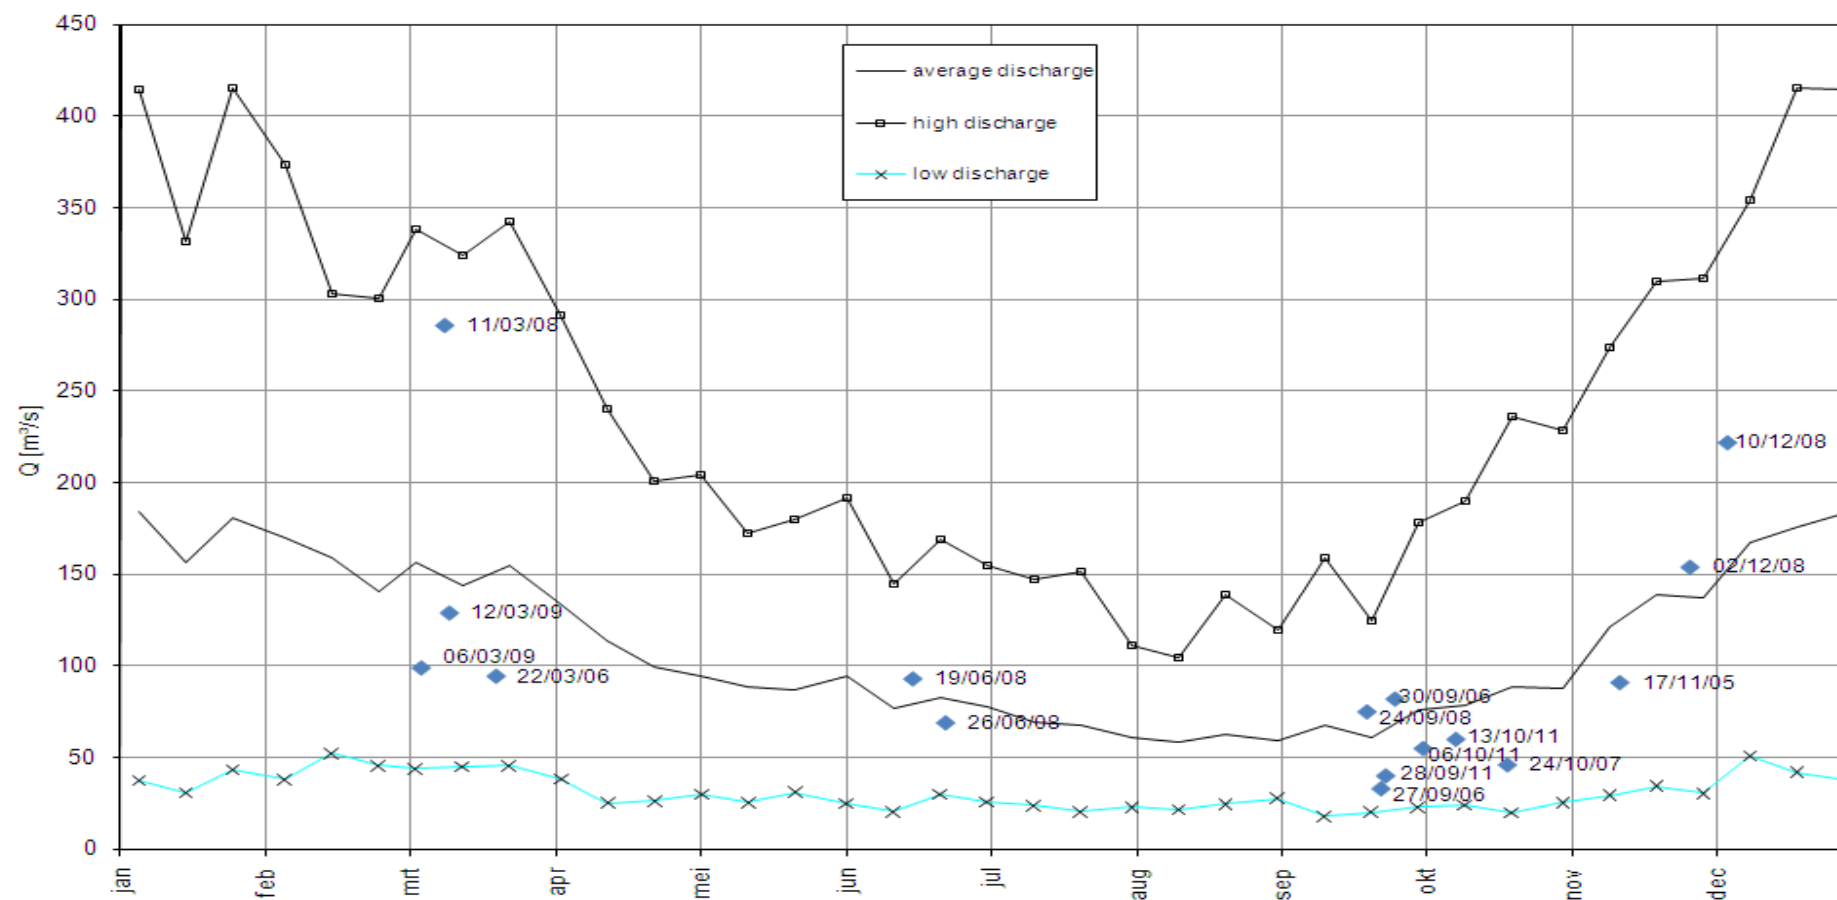

Annex Figure 7: Mean fresh water discharge over a period of 30 year (1971-2000) with the monthly discharge of 2008-2009

Annex C Navigation information as recorded on site

Ship:		Parel 36 & Parel II
Location:		Deurganckdok (transect DGD)
Transect	Remarks	
5019DGD	schroefwater	
5033DGD	schroefwater door baggerboot	
5051DGD	Afgebroken transect wegens schroefwater	
5052DGD	storing door schroefwater	
5064DGD	eerste deel wegknippen wegens schroefwater	
5070DGD	schroefwater tussen ensembles 135-139 en 170-178	
5084DGD	schoefwater	
5092DGD	schroefwater	
5104DGD	zeeschip binnen, schroefwater van ensemble 78 tot 119	

Annex D unesco PPs-78 formula for calculating salinity

Practical Salinity Scale (PPS 78) Salinity in the range of 2 to 42

Constants from the 19th Edition of Standard Methods

R cond.ratio	0.0117	R = $\frac{C}{42.914\text{mS / cm}}$							
C Cond at t	0.5	Input conductivity in mS/cm of sample							
t deg. C	22.00	Input temperature of sample solution							
P dBar	20	Input pressure at which sample is measured in decibars							
Rp	1.0020845	R_p = $1 + \frac{p(e_1 + e_2p + e_3p^2)}{1 + d_1t + d_2t^2 + (d_3 + d_4t)R}$							
rt	1.1641102	r_t = $c_0 + c_1t + c_2t^2 + c_3t^3 + c_4t^4$							
Rt	0.0099879	R_t = $\frac{R}{R_p \times r_t}$							
Delta S	-0.0010	Delta S = $\frac{(t-15)}{1+k(t-15)} (b_0 + b_1R_t^{1/2} + b_2R_t^{3/2} + b_3R_t^{5/2} + b_4R_t^2 + b_5R_t^{5/2})$							
S = Salinity	0.257	S = $a_0 + a_1R_t^{1/2} + a_2R_t^{3/2} + a_3R_t^2 + a_4R_t^{5/2} + a_5R_t^2 + \text{delta S}$							
a0	0.0080	b0	0.0005	c0	0.6766097	d1	3.426E-02	e1	2.070E-04
a1	-0.1692	b1	-0.0056	c1	2.00564E-02	d2	4.464E-04	e2	-6.370E-08
a2	25.3851	b2	-0.0066	c2	1.104259E-04	d3	4.215E-01	e3	3.989E-12
a3	14.0941	b3	-0.0375	c3	-6.9698E-07	d4	-3.107E-03		
a4	-7.0261	b4	0.0636	c4	1.0031E-09				
a5	2.7081	b5	-0.0144						
		k	0.0162						

R = ratio of measured conductivity to the conductivity of the Standard Seawater Solution

Conductivity Ratio R is a function of salinity, temperature, and hydraulic pressure. So that we can factor R into three parts i.e.

$$R = R_t \times R_p \times r_t$$

$$R = C(S, t, p) / C(35, 15, 0)$$

C = 42.914 mS/cm at 15 deg C and 0 dbar pressure ie C(35,15,0) where 35 is the salinity

Ocean pressure is usually measured in decibars. 1 dbar = 10⁻¹ bar = 10⁵ dyne/cm² = 10⁴ Pascal.

Annex E Overview of sediview settings

Ship:		Parel II	
Location:		Deurganckdok (transect DGD)	
Date		06/10/2011	
Parameters	Value	Parameters	Value
<i>Inst. Depth (m)</i>	1	<i>Compass offset (°)</i>	0
<i>Force depth (m)</i>	0	<i>Beam 3 misalignment (°)</i>	0
<i>Velocity reference</i>	BT	<i>Effective particle size (µm)</i>	20
<i>Speed of sound algorithm</i>	Urlick	<i>Beam1 scale factor</i>	0.435
<i>Error velocity</i>	YES	<i>Beam2 scale factor</i>	0.4225
<i>External heading</i>	NO	<i>Beam3 scale factor</i>	0.430
<i>External Depth</i>	NO	<i>Beam4 scale factor</i>	0.4325
<i>SSC factor top (%)</i>	100	<i>Discharge factor top</i>	Constant
<i>SSC factor bottom (%)</i>	125	<i>Discharge factor bottom</i>	Power
<i>Shape factor left bank</i>	0.91	<i>Shape factor right bank</i>	0.91


Filename	Calibration const (Ks)	Backscatter coefficient (S)	Distance to the left bank (m)	Distance to the right bank (m)
5001DGDT	52	19.0	29.61	26.32
5002DGDT	52	19.0	3.78	23.04
5003DGDT	52	19.0	18.5	10.8
5004DGDT	52	19.0	3.82	32.03
5005DGDT	52	19.0	6.82	23
5006DGDT	52	19.0	2.1	19.48
5008DGDT	52	19.0	10.56	30.29
5009DGDT	52	19.0	1.98	38.25
5011DGDT	52	19.5	3.15	20.57
5013DGDT	52	19.5	8.77	20.72
5015DGDT	52	20.0	17.94	24.37
5017DGDT	52	20.3	114.75	34.3
5019DGDT	52	20.5	21.78	31.49
5021DGDT	52	20.5	0.9	21.37
5023DGDT	52	20.3	9.42	23.88
5025DGDT	52	20.3	0.72	22.9


Filename	Calibration const (Ks)	Backscatter coefficient (S)	Distance to the left bank (m)	Distance to the right bank (m)
5027DGDT	52	20.3	0.67	26.04
5029DGDT	52	21.0	0.7	22.79
5031DGDT	52	21.3	12.72	27.39
5033DGDT	52	22.3	0.74	30.7
5035DGDT	52	21.8	1.98	35.05
5037DGDT	52	21.0	0.39	23.31
5039DGDT	52	21.0	4.45	22.23
5041DGDT	52	22.5	3.99	40.62
5043DGDT	52	22.5	16.42	19.08
5045DGDT	52	22.5	2.79	28.94
5047DGDT	52	20.3	20.59	24.61
5049DGDT	52	20.3	6.3	17.76
5051DGDT	52	20.5	255.02	15.77
5052DGDT	52	20.5	12.25	17.59
5054DGDT	52	20.3	1.63	30.35
5056DGDT	52	20.5	16.04	25.03
5058DGDT	52	21.0	1.48	28.42
5060DGDT	52	21.5	2.85	16.64
5062DGDT	52	20.3	1.21	21.59
5064DGDT	52	21.3	16.59	15.33
5066DGDT	52	22.8	5.85	25.08
5068DGDT	52	23.5	18.72	21.45
5070DGDT	52	22.5	3.43	45.15
5072DGDT	52	21.0	8.01	28.76
5074DGDT	52	19.5	3.57	38.13
5076DGDT	52	18.8	23.52	20.41
5078DGDT	52	19.5	1.74	37
5080DGDT	52	19.5	6	13.87
5082DGDT	52	19.8	7.08	31.96
5084DGDT	52	20.3	17.95	47
5086DGDT	52	20.0	3.14	22.87


<i>Filename</i>	<i>Calibration const (Ks)</i>	<i>Backscatter coefficient (S)</i>	<i>Distance to the left bank (m)</i>	<i>Distance to the right bank (m)</i>
5088DGDT	52	19.8	12.51	17.78
5090DGDT	52	19.8	18.54	27.5
5092DGDT	52	20.5	11.88	18.31
5094DGDT	52	20.8	4.76	29.5
5096DGDT	52	20.3	4.49	32.4
5098DGDT	52	21.3	9.07	13.25
5100DGDT	52	21.5	18.23	17.1
5102DGDT	52	21.0	40.27	23.71
5104DGDT	52	20.5	54.16	10.38
5106DGDT	52	19.5	1.38	14.15


Annex F Contourplots of flow velocities, Sediment Concentration and Sediment Flux, per sailed transect


This page is intentionally left blank.

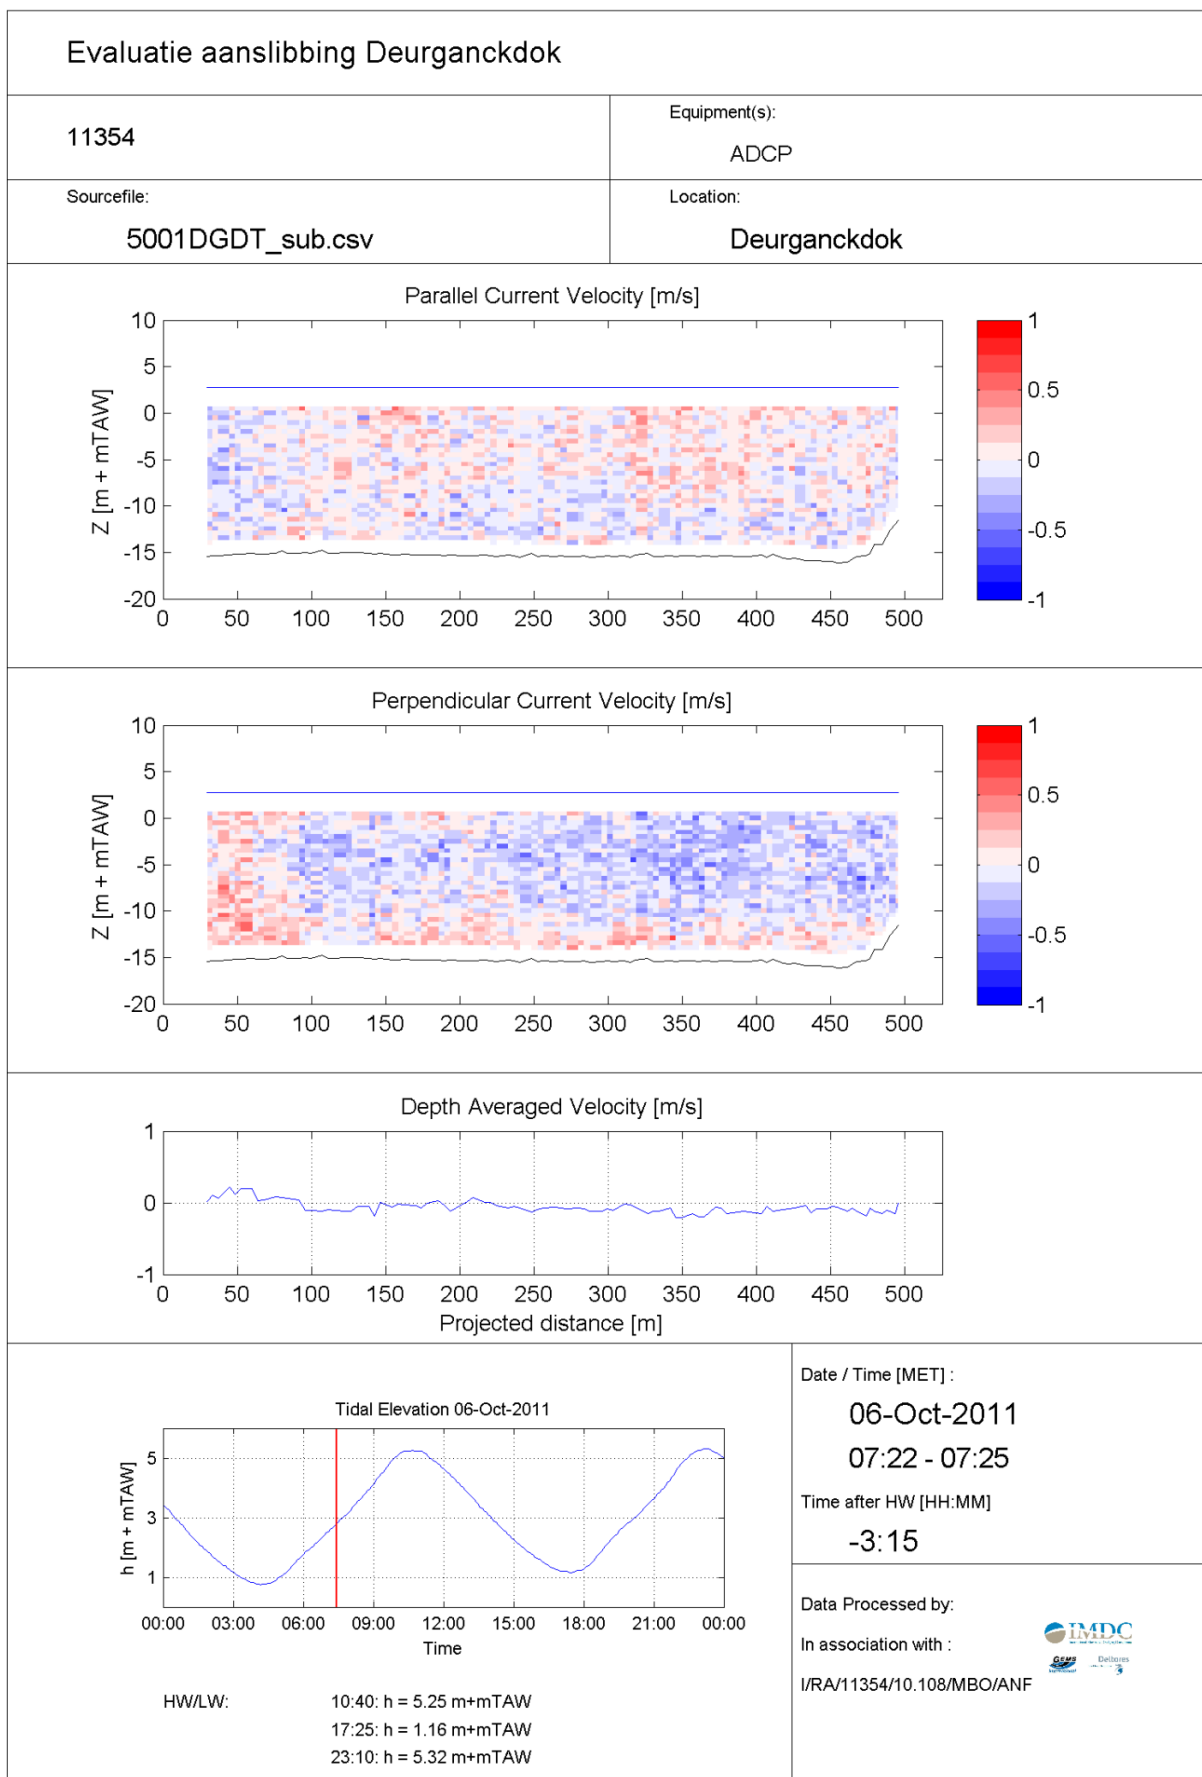

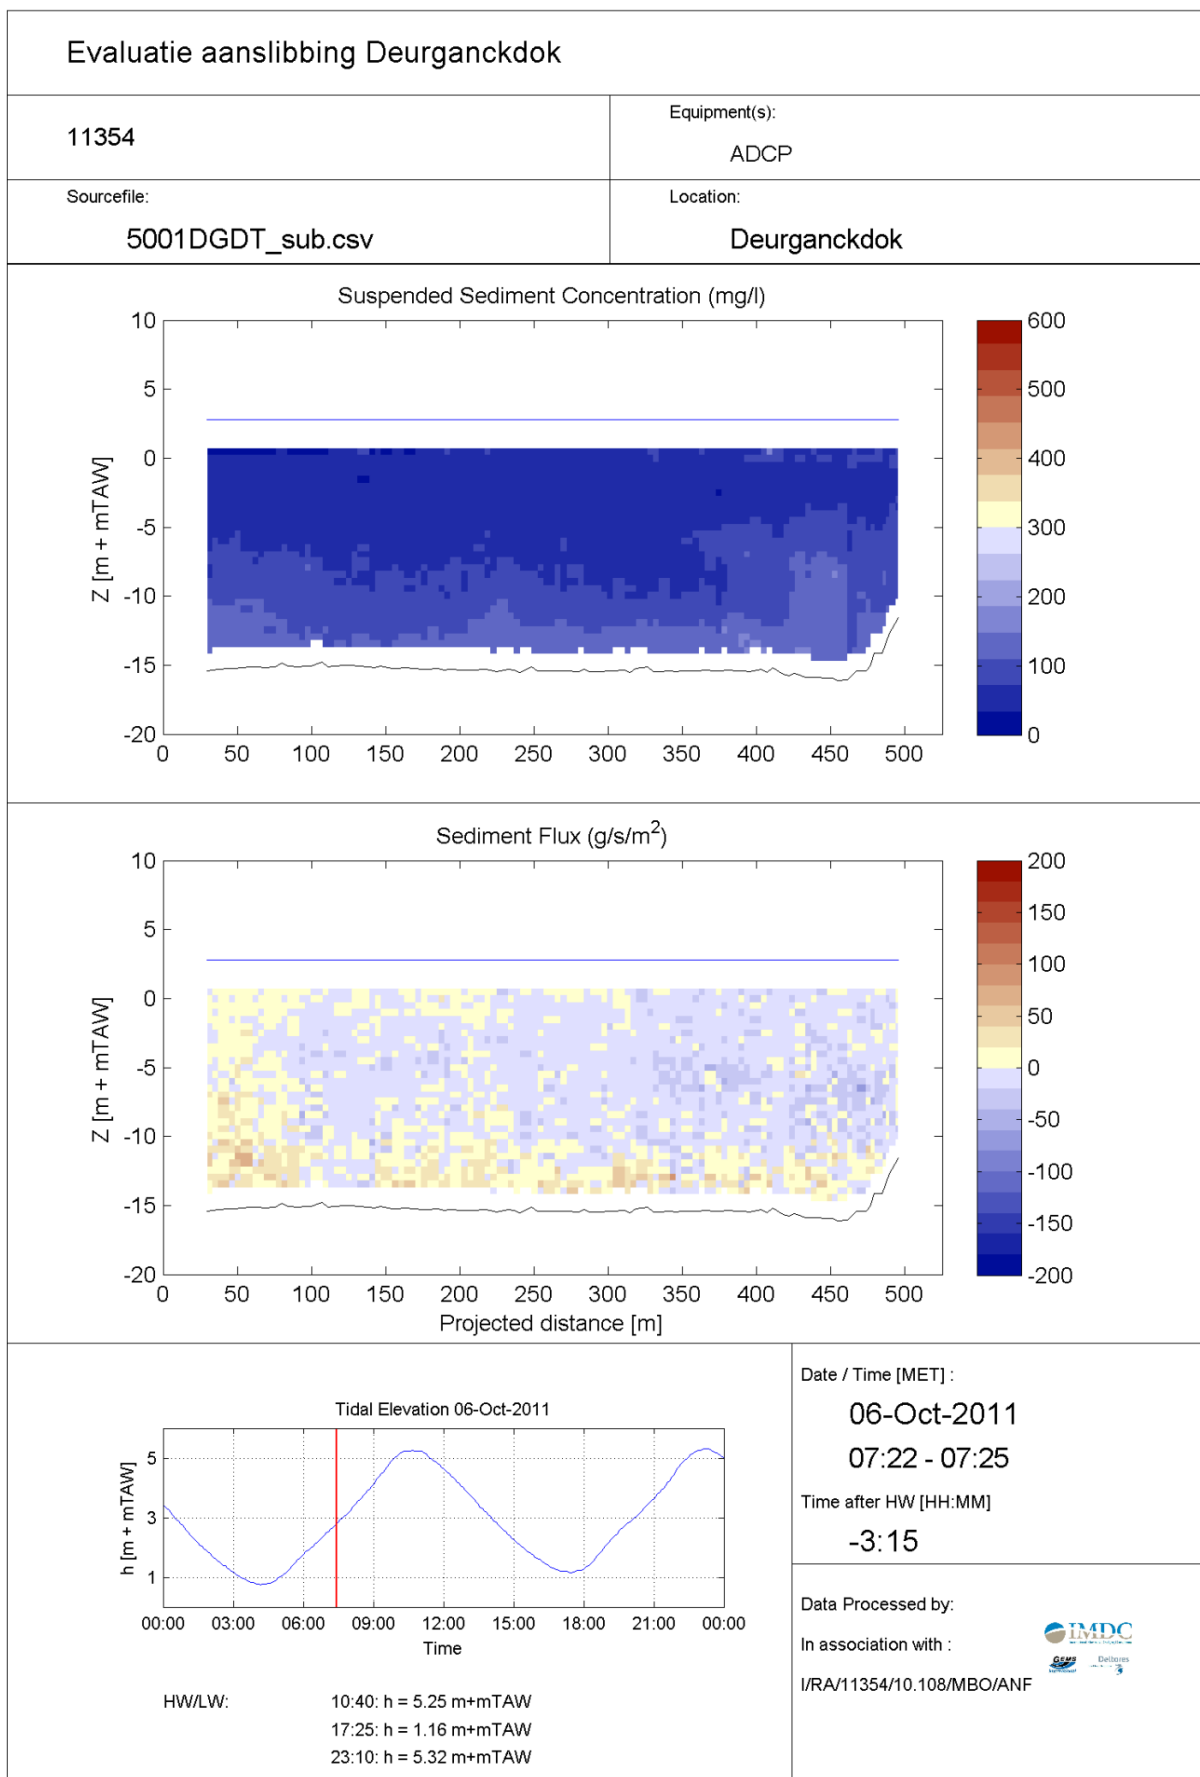

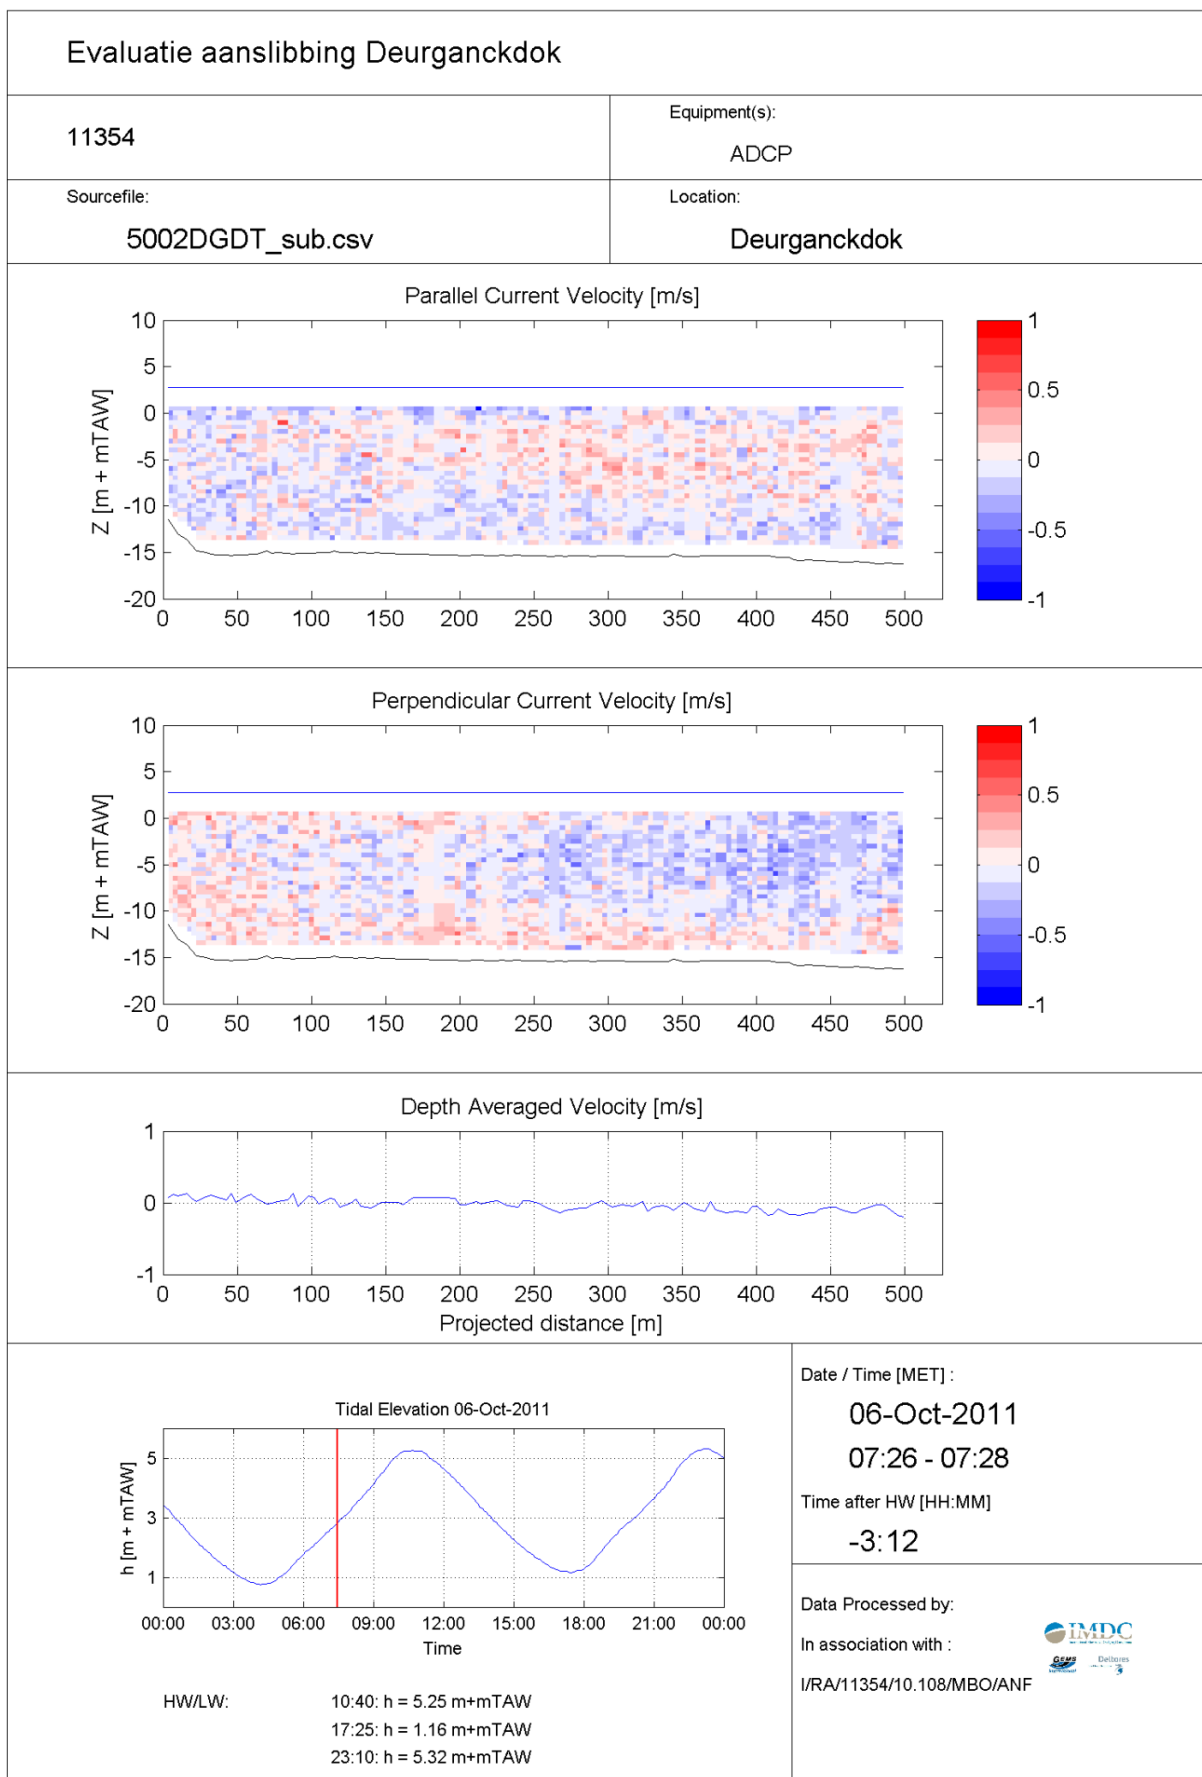

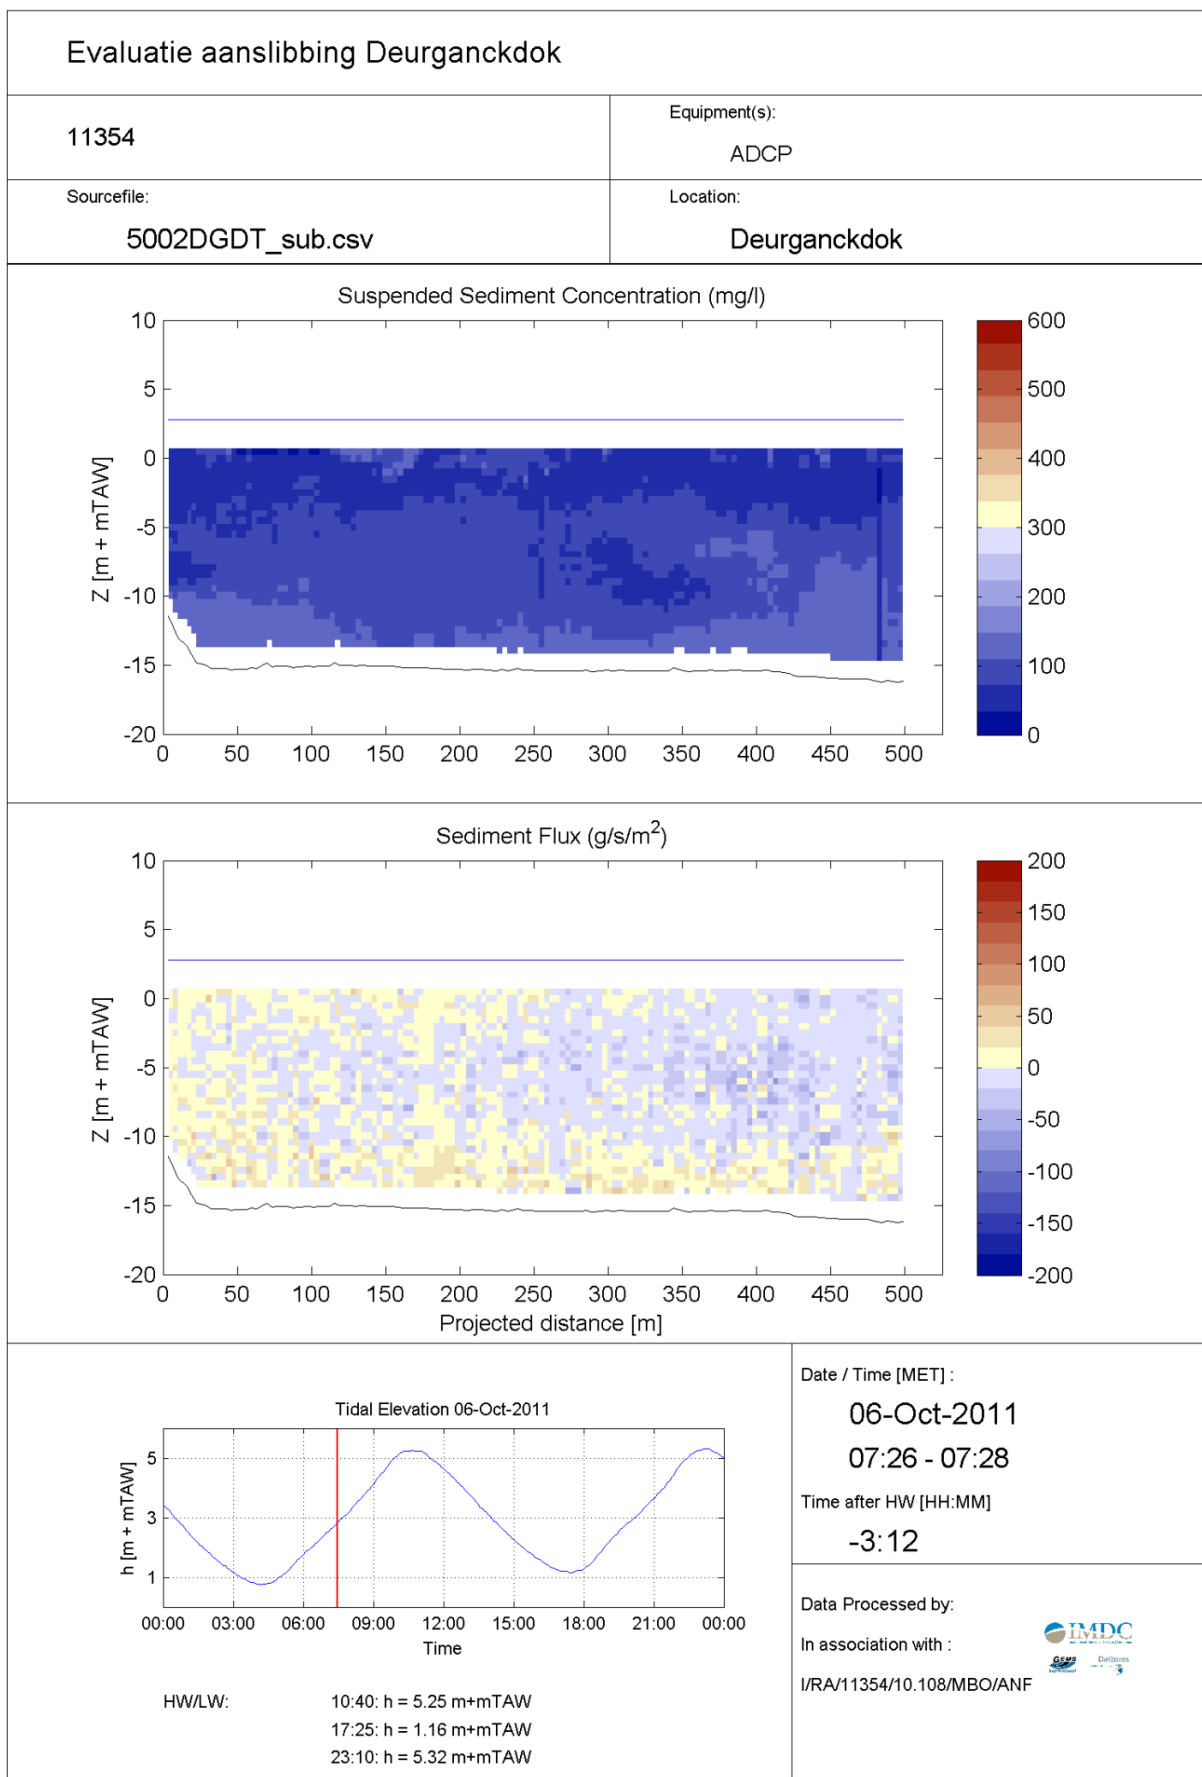

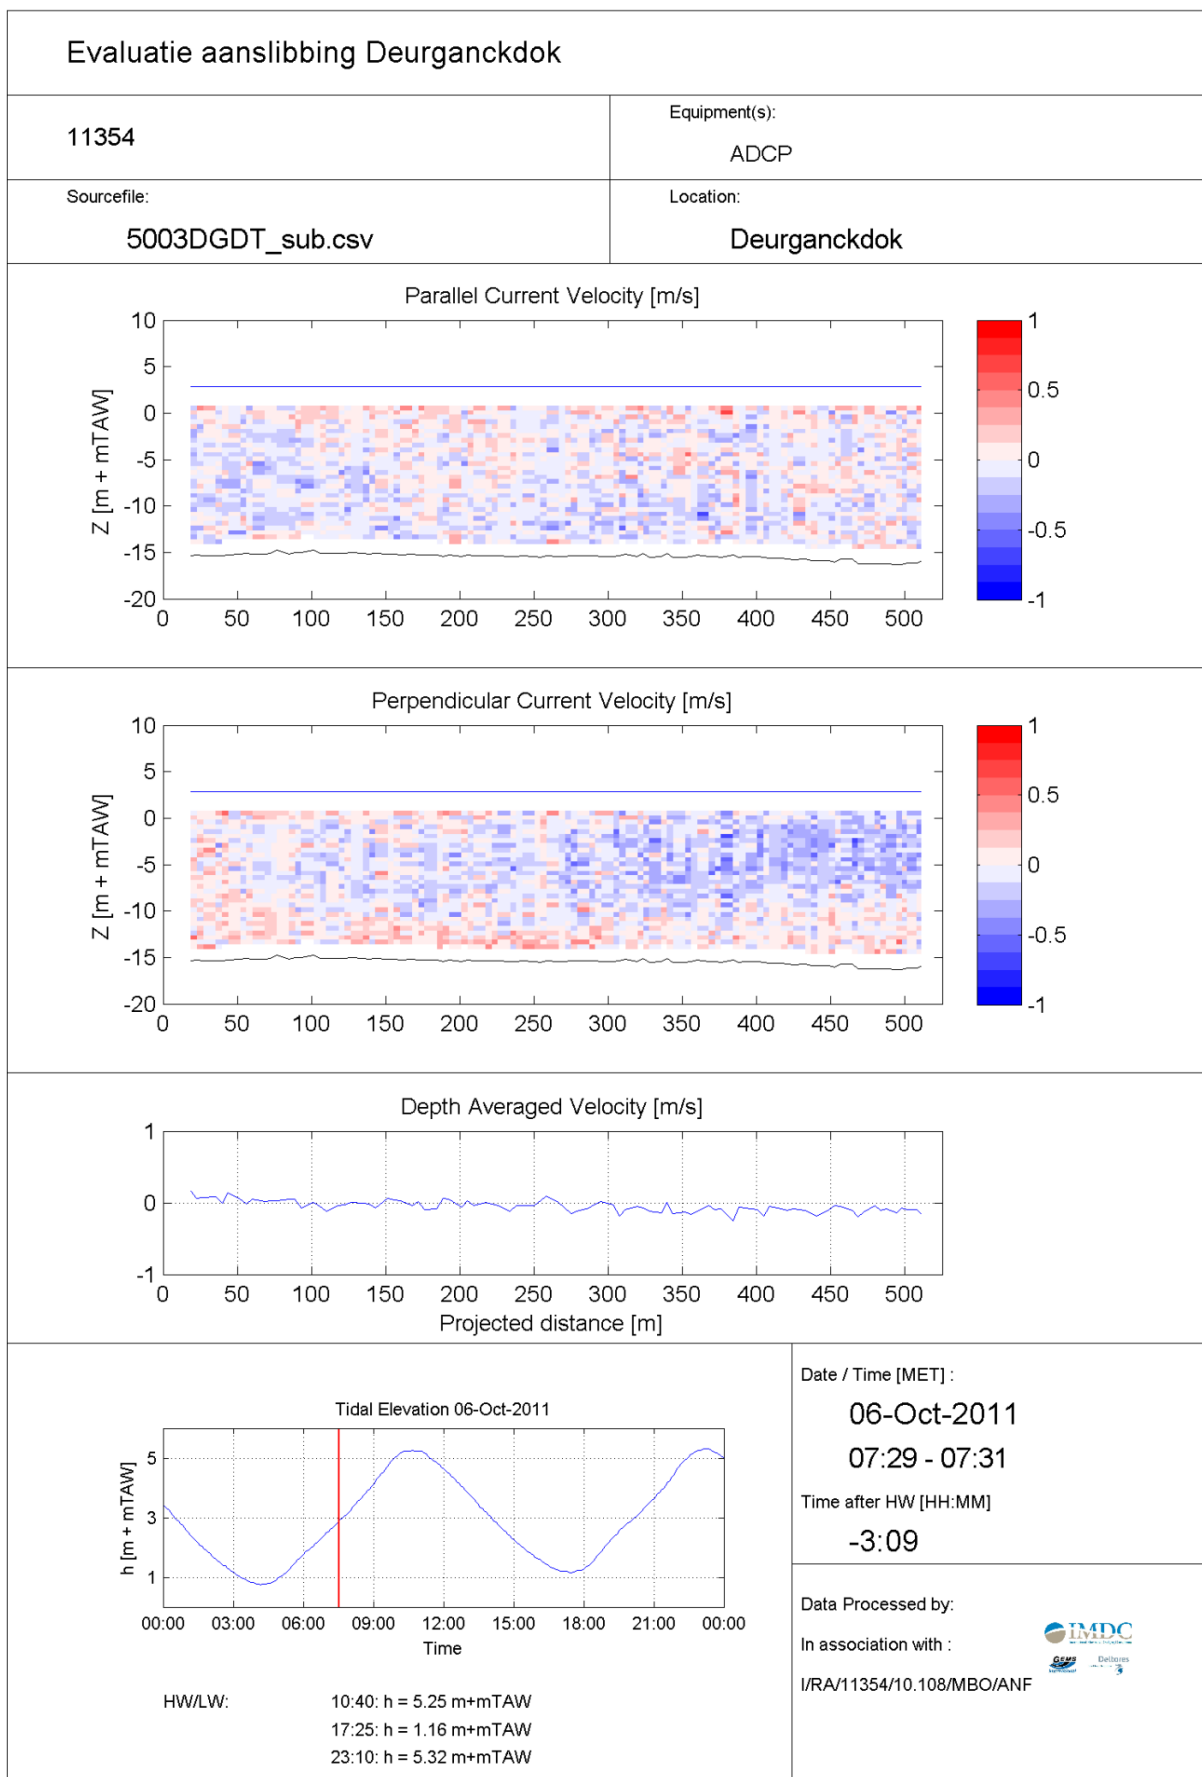

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5003DGDT_sub.csv

Location:

Deurganckdok

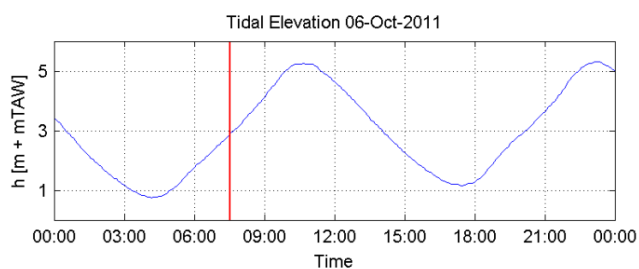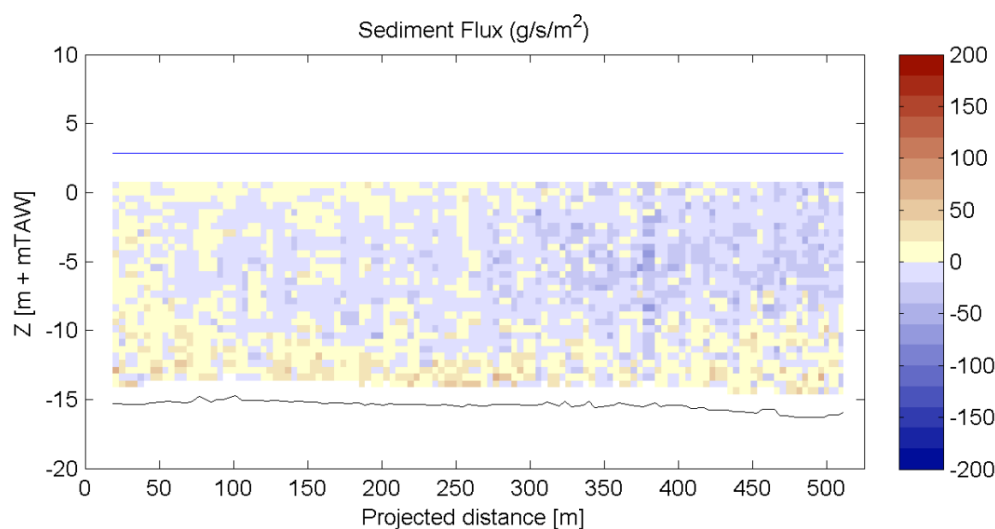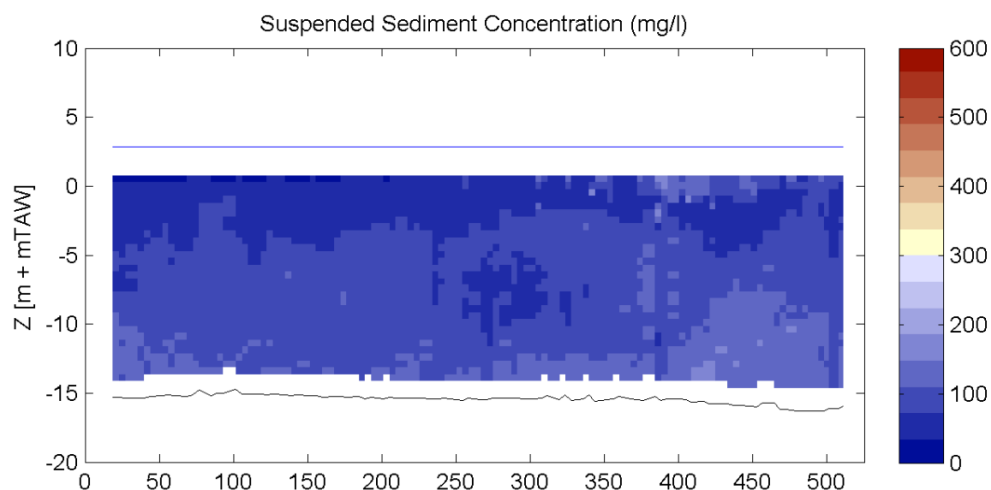

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

07:29 - 07:31

Time after HW [HH:MM]


-3:09


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




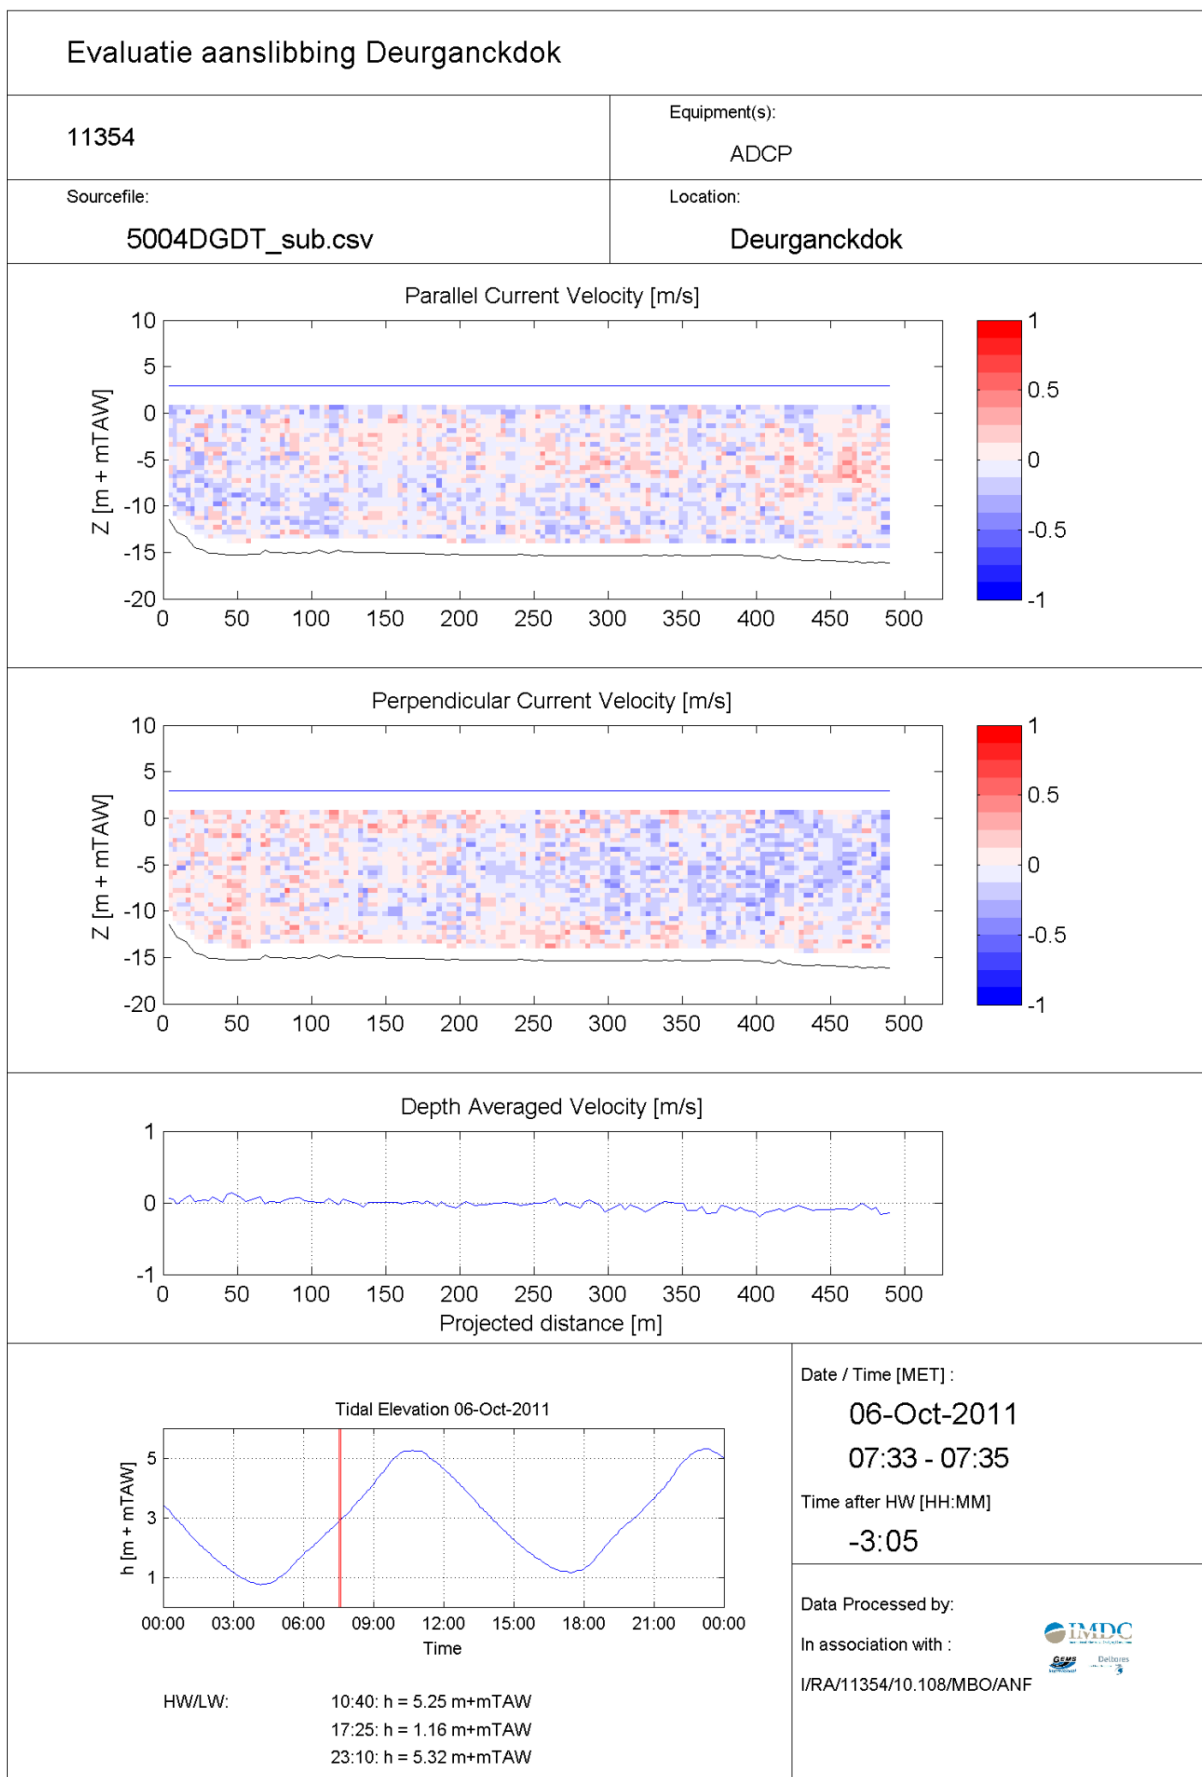


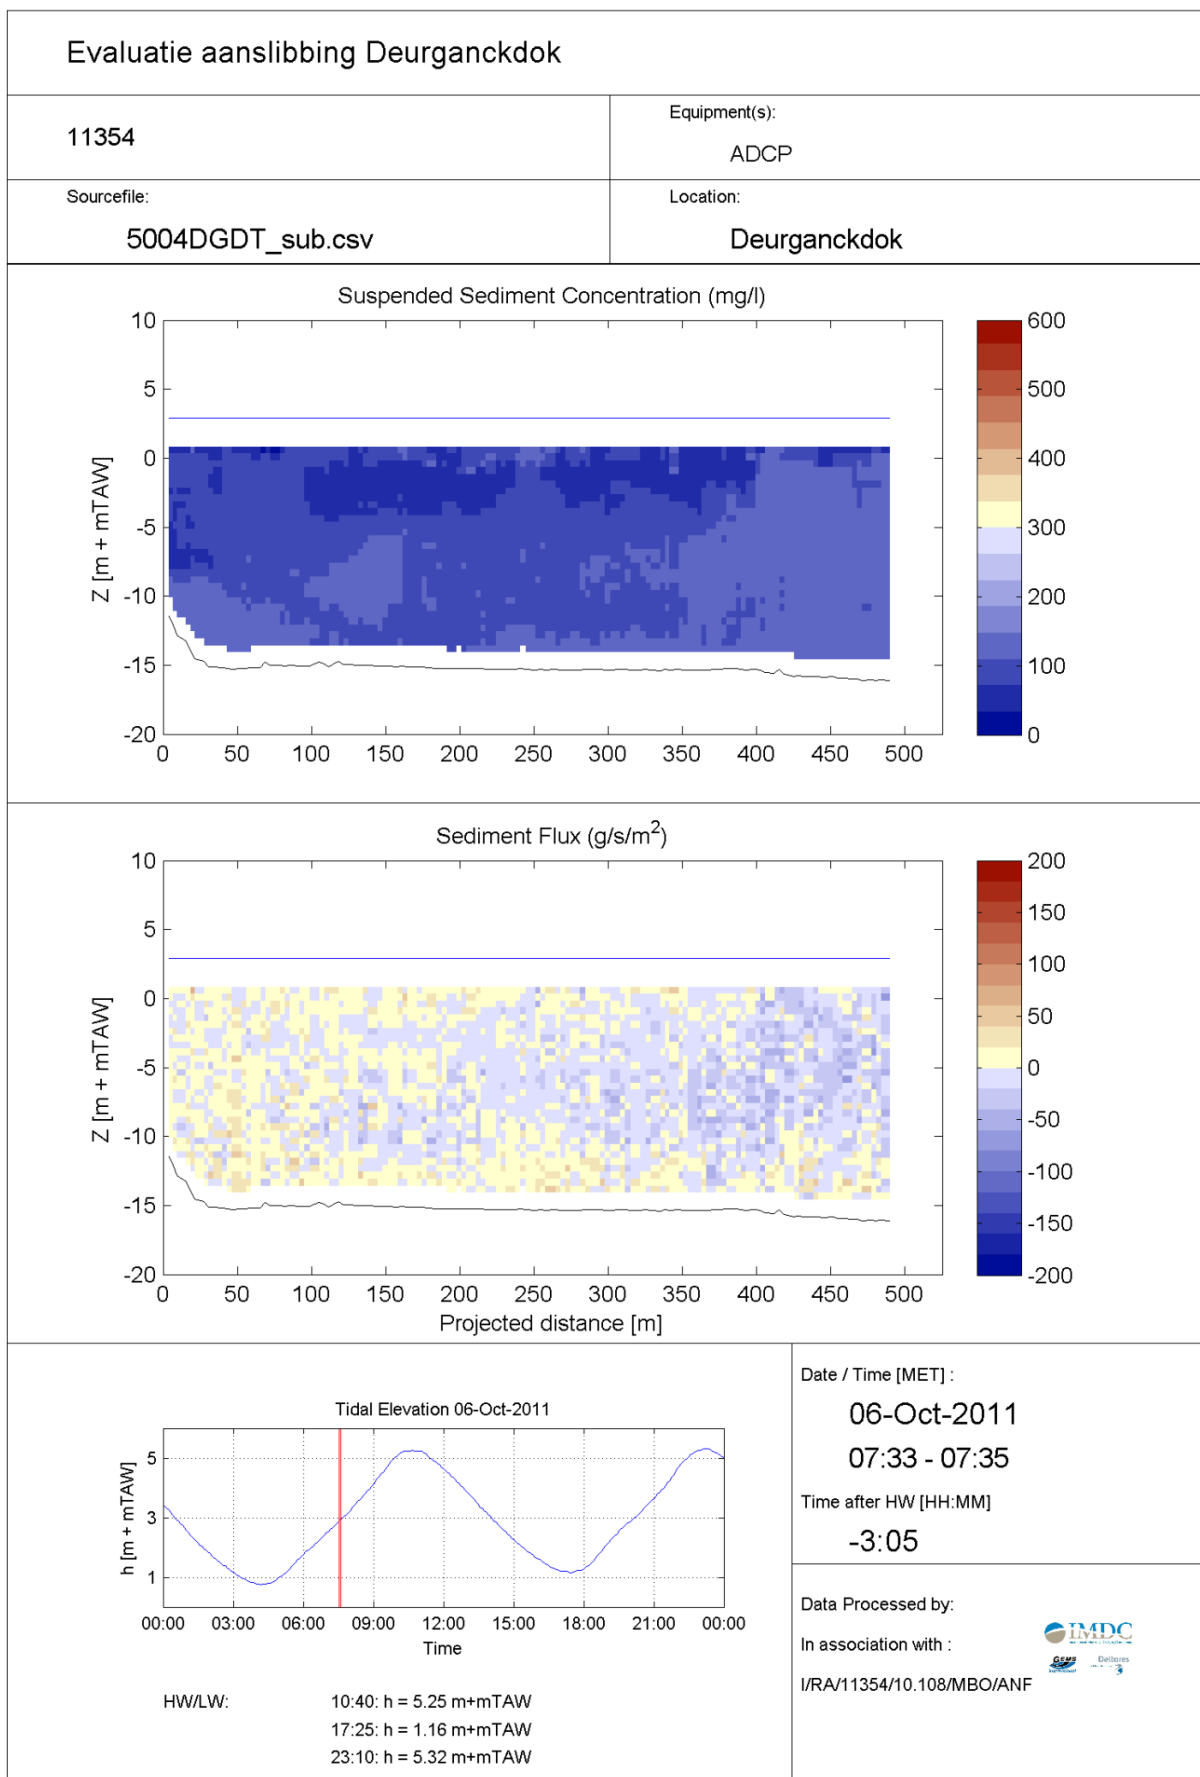


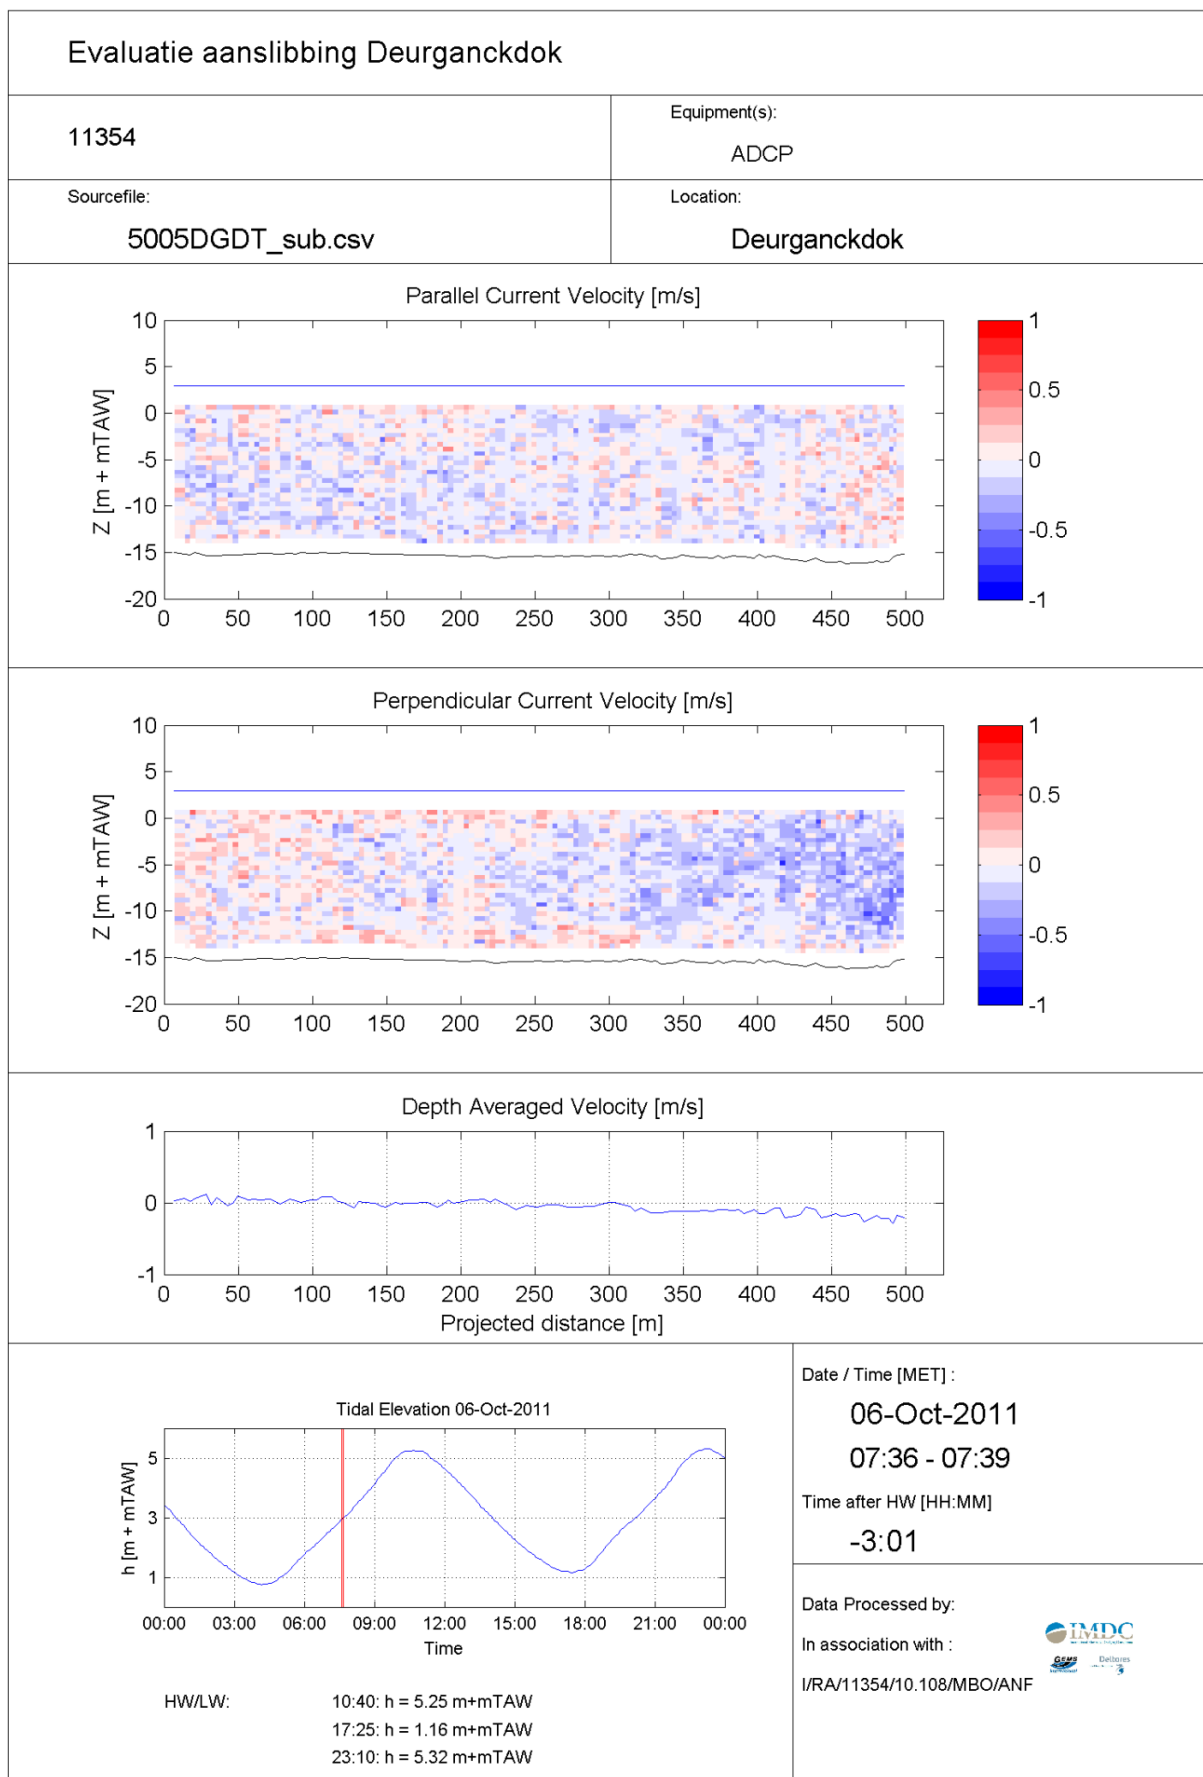


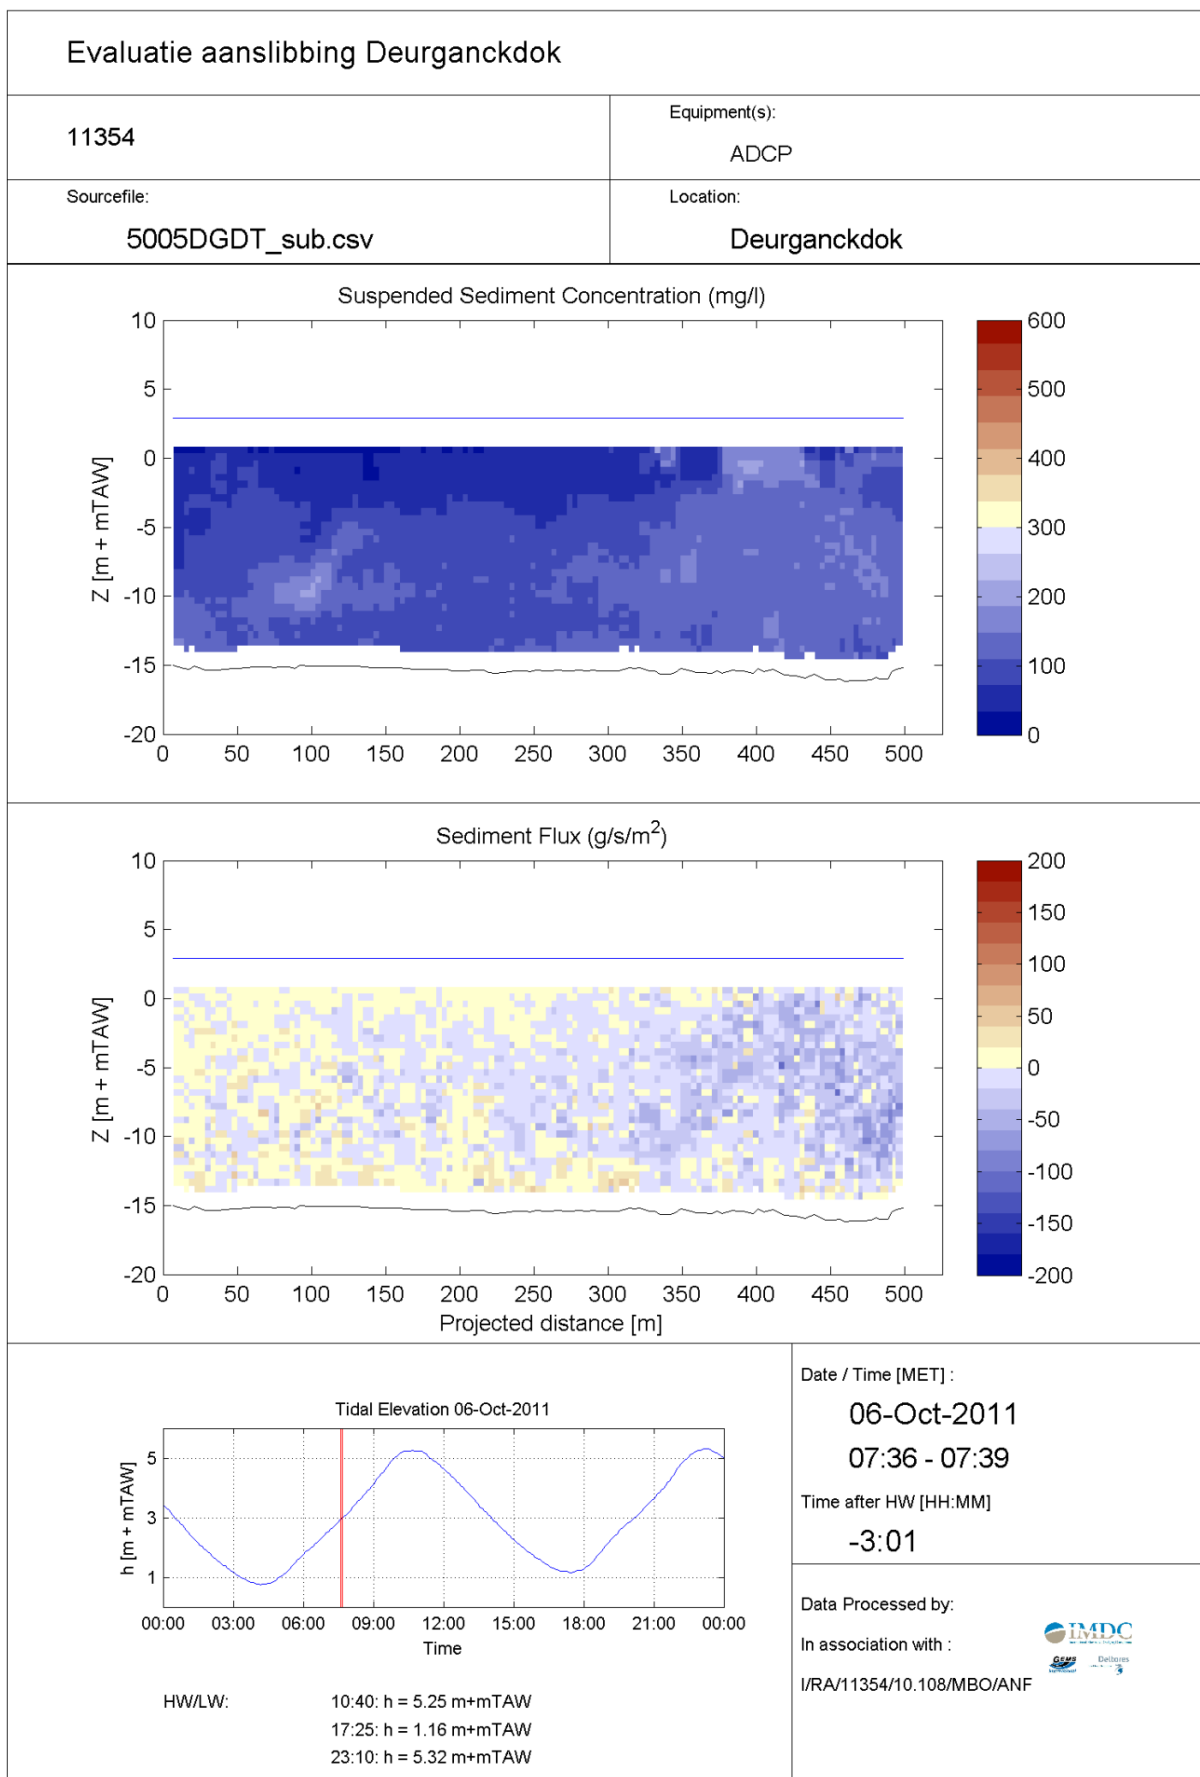


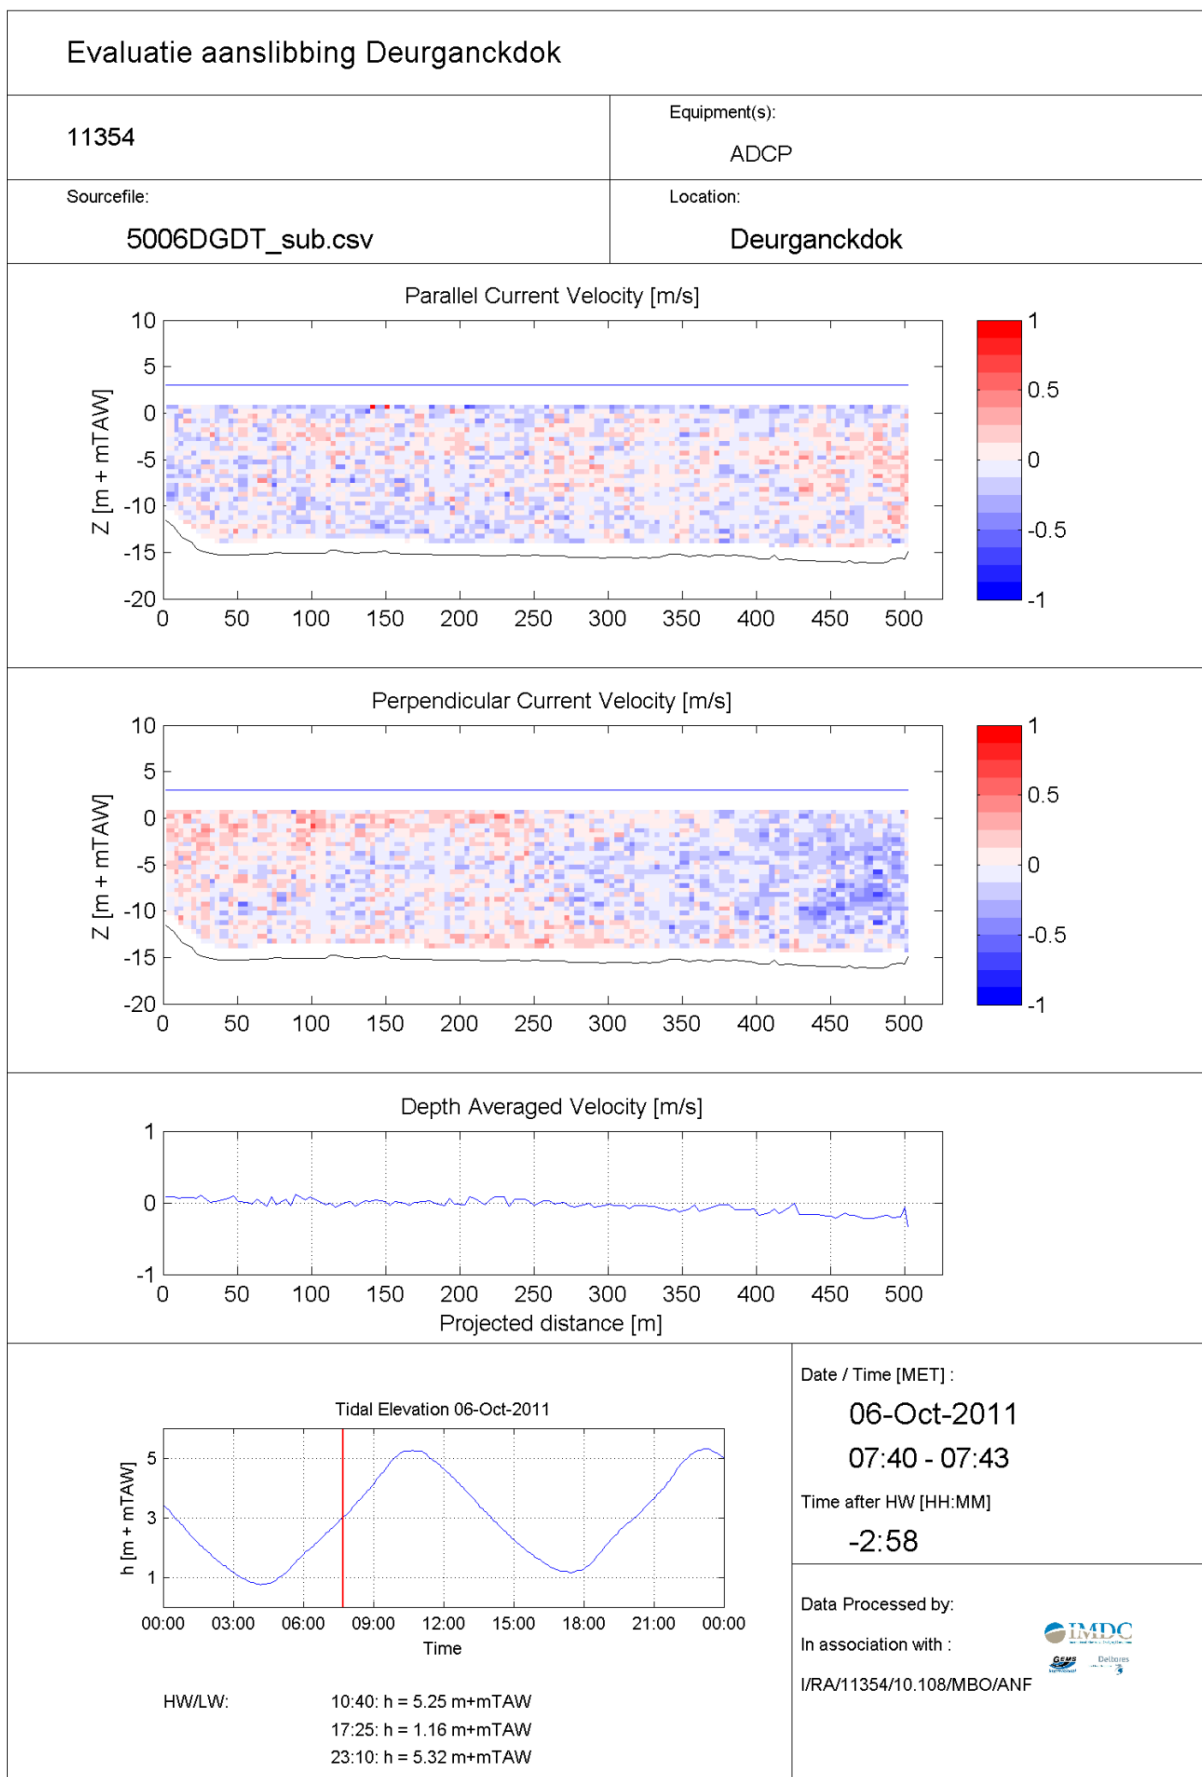


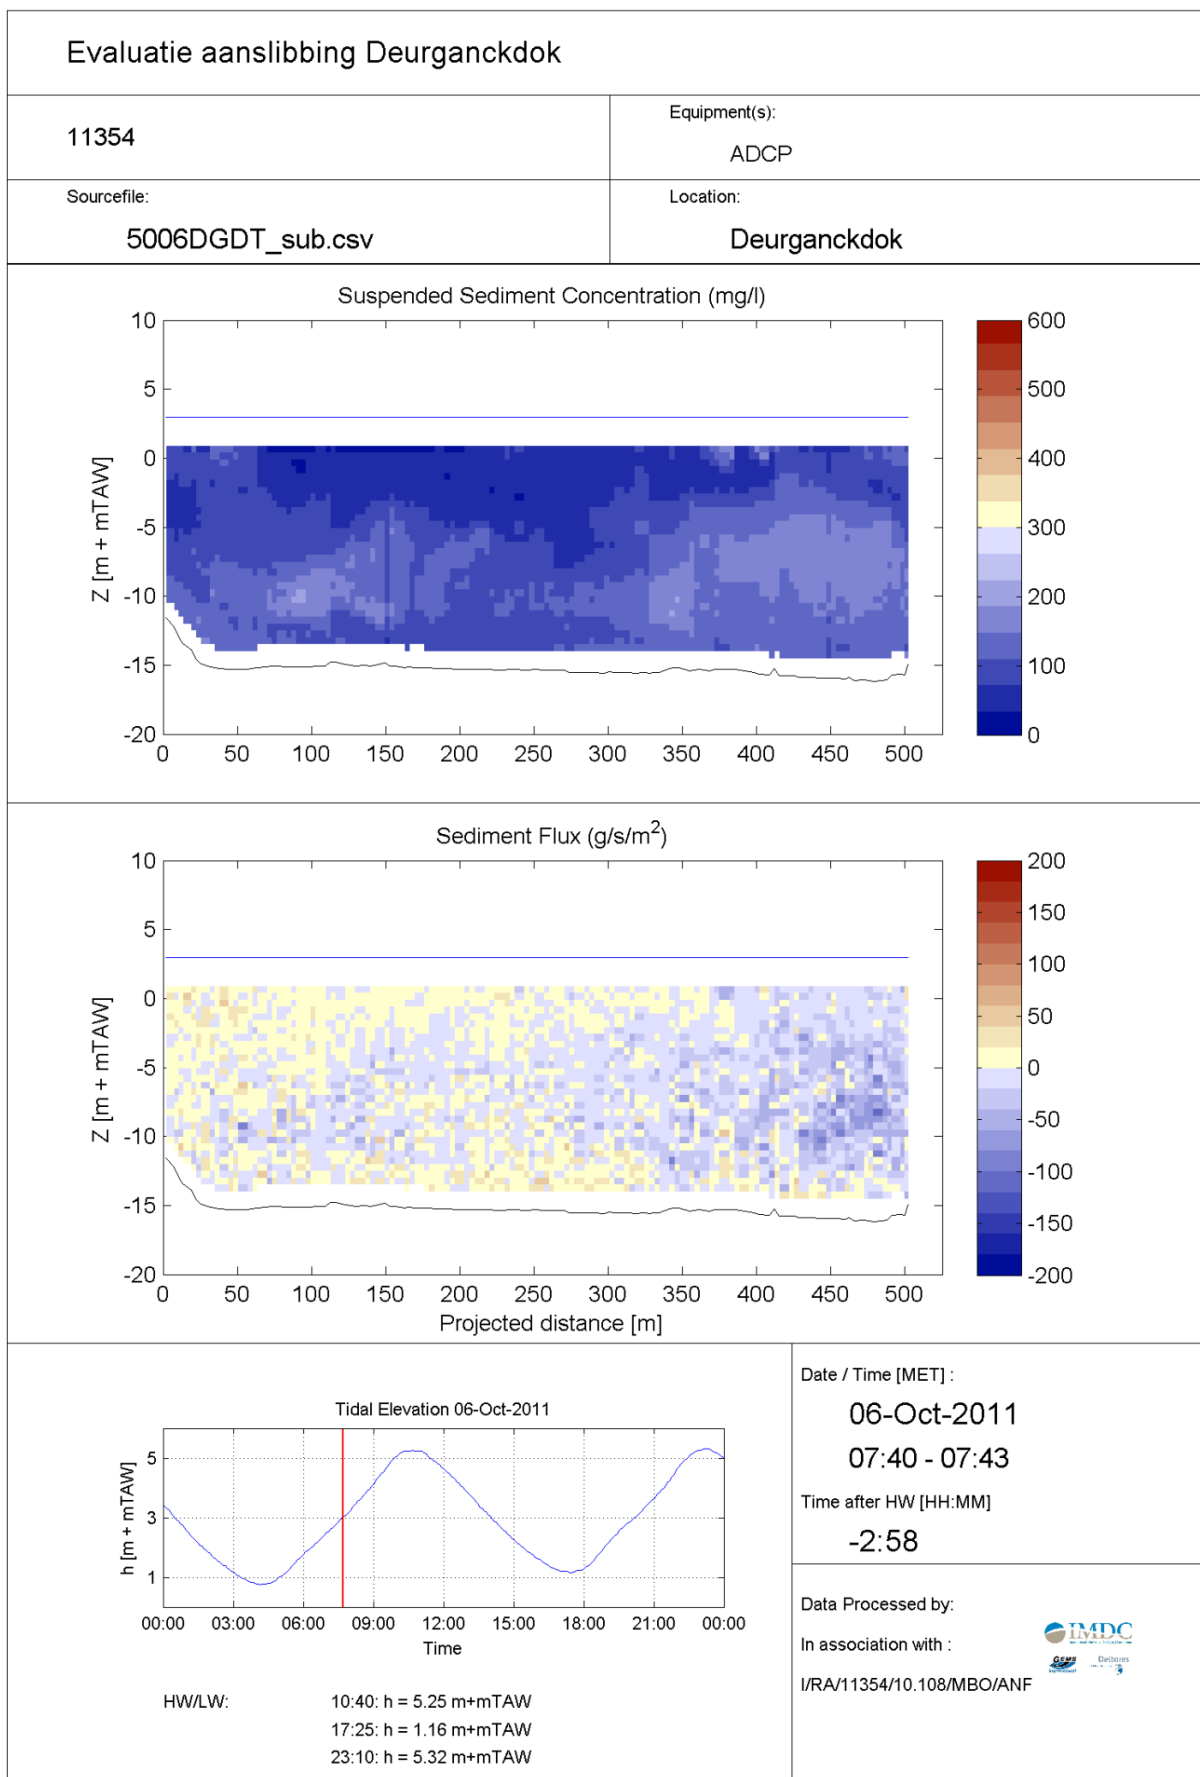


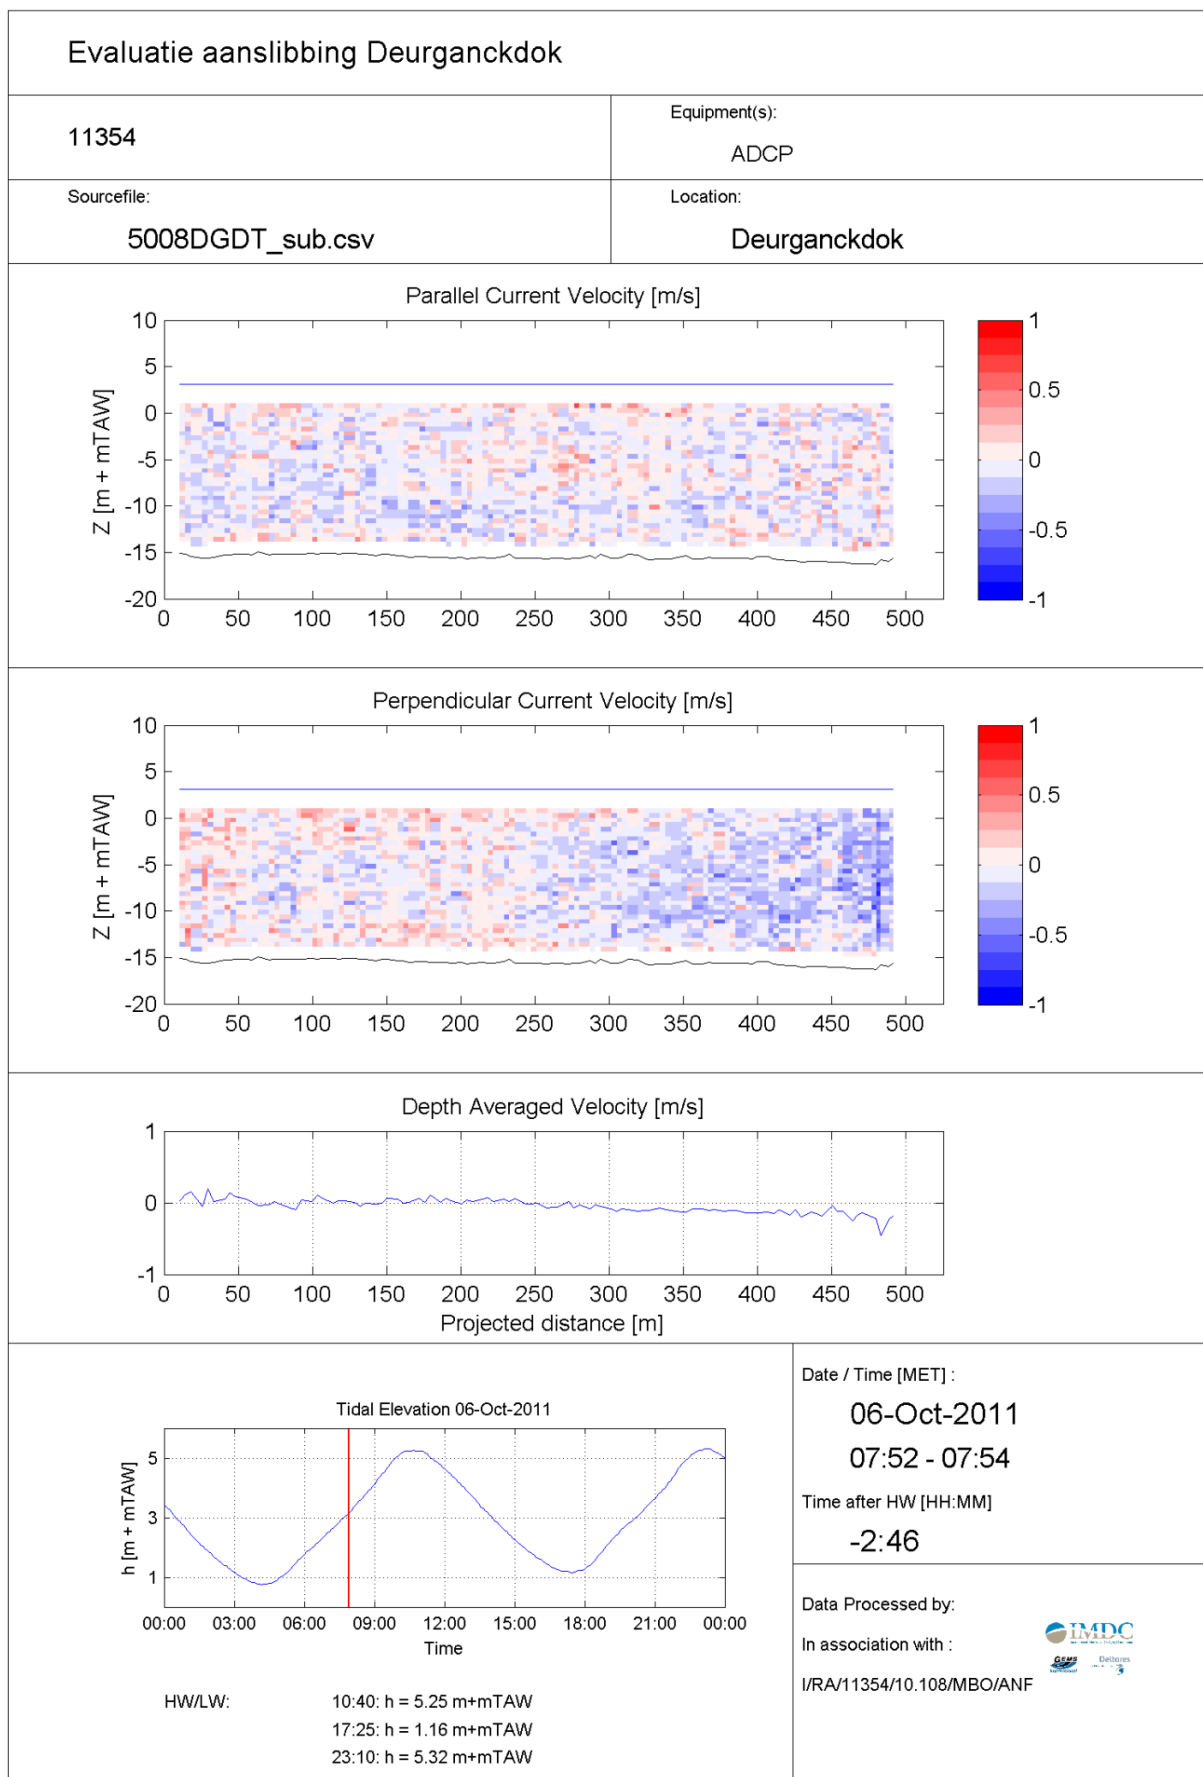


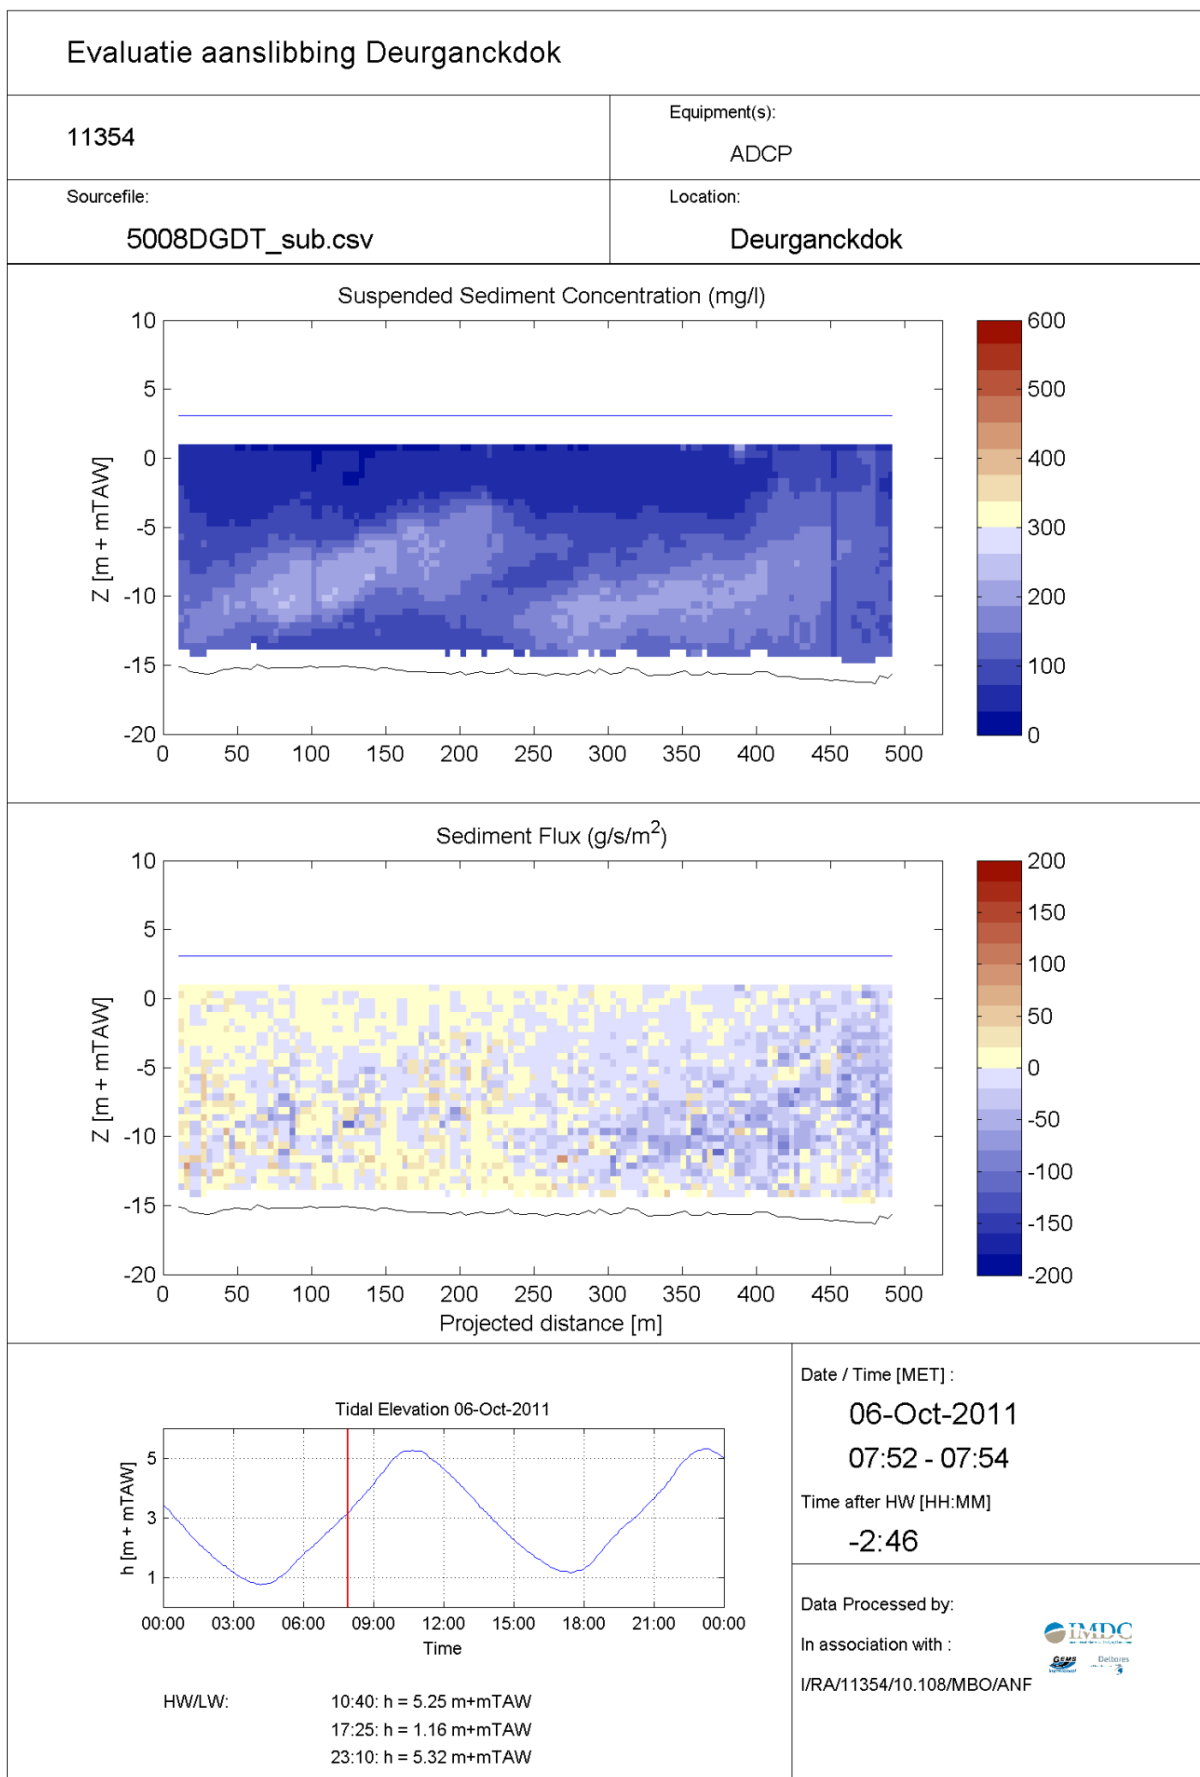


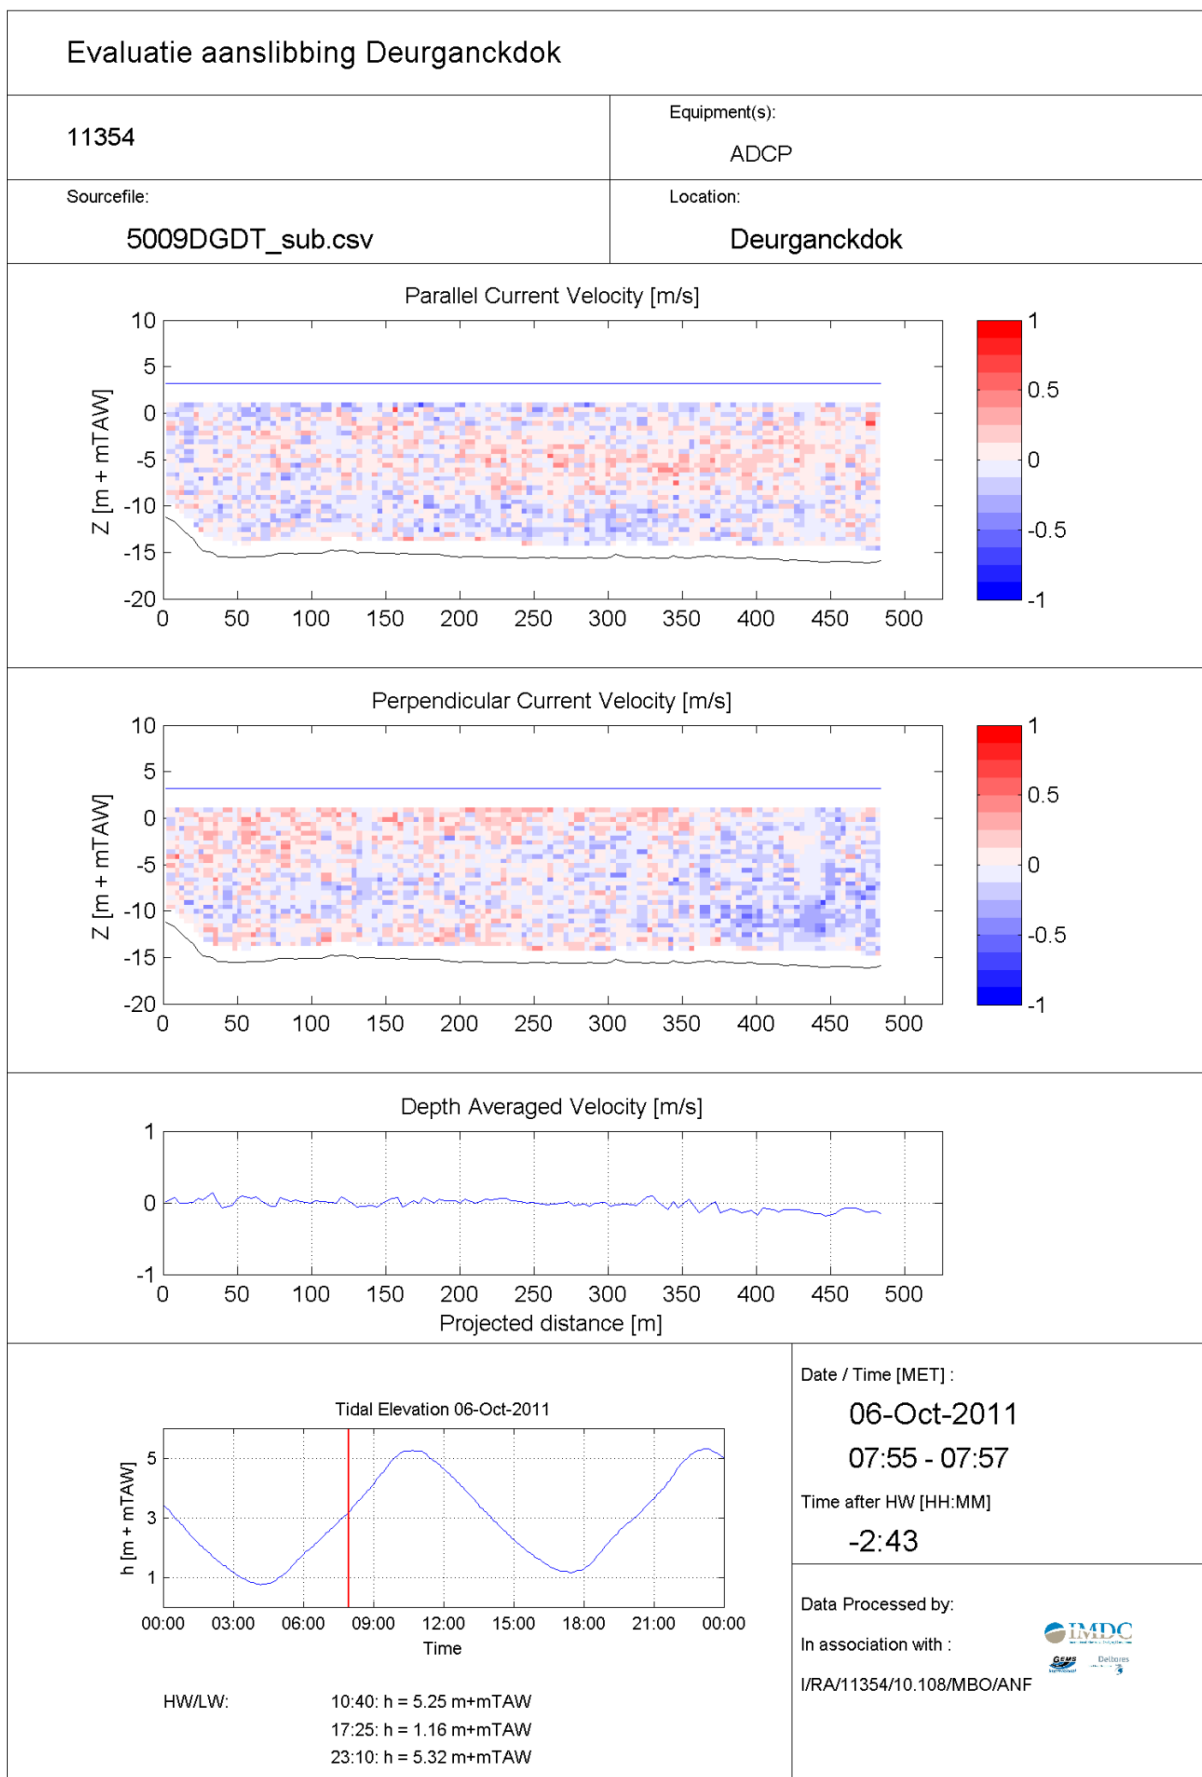

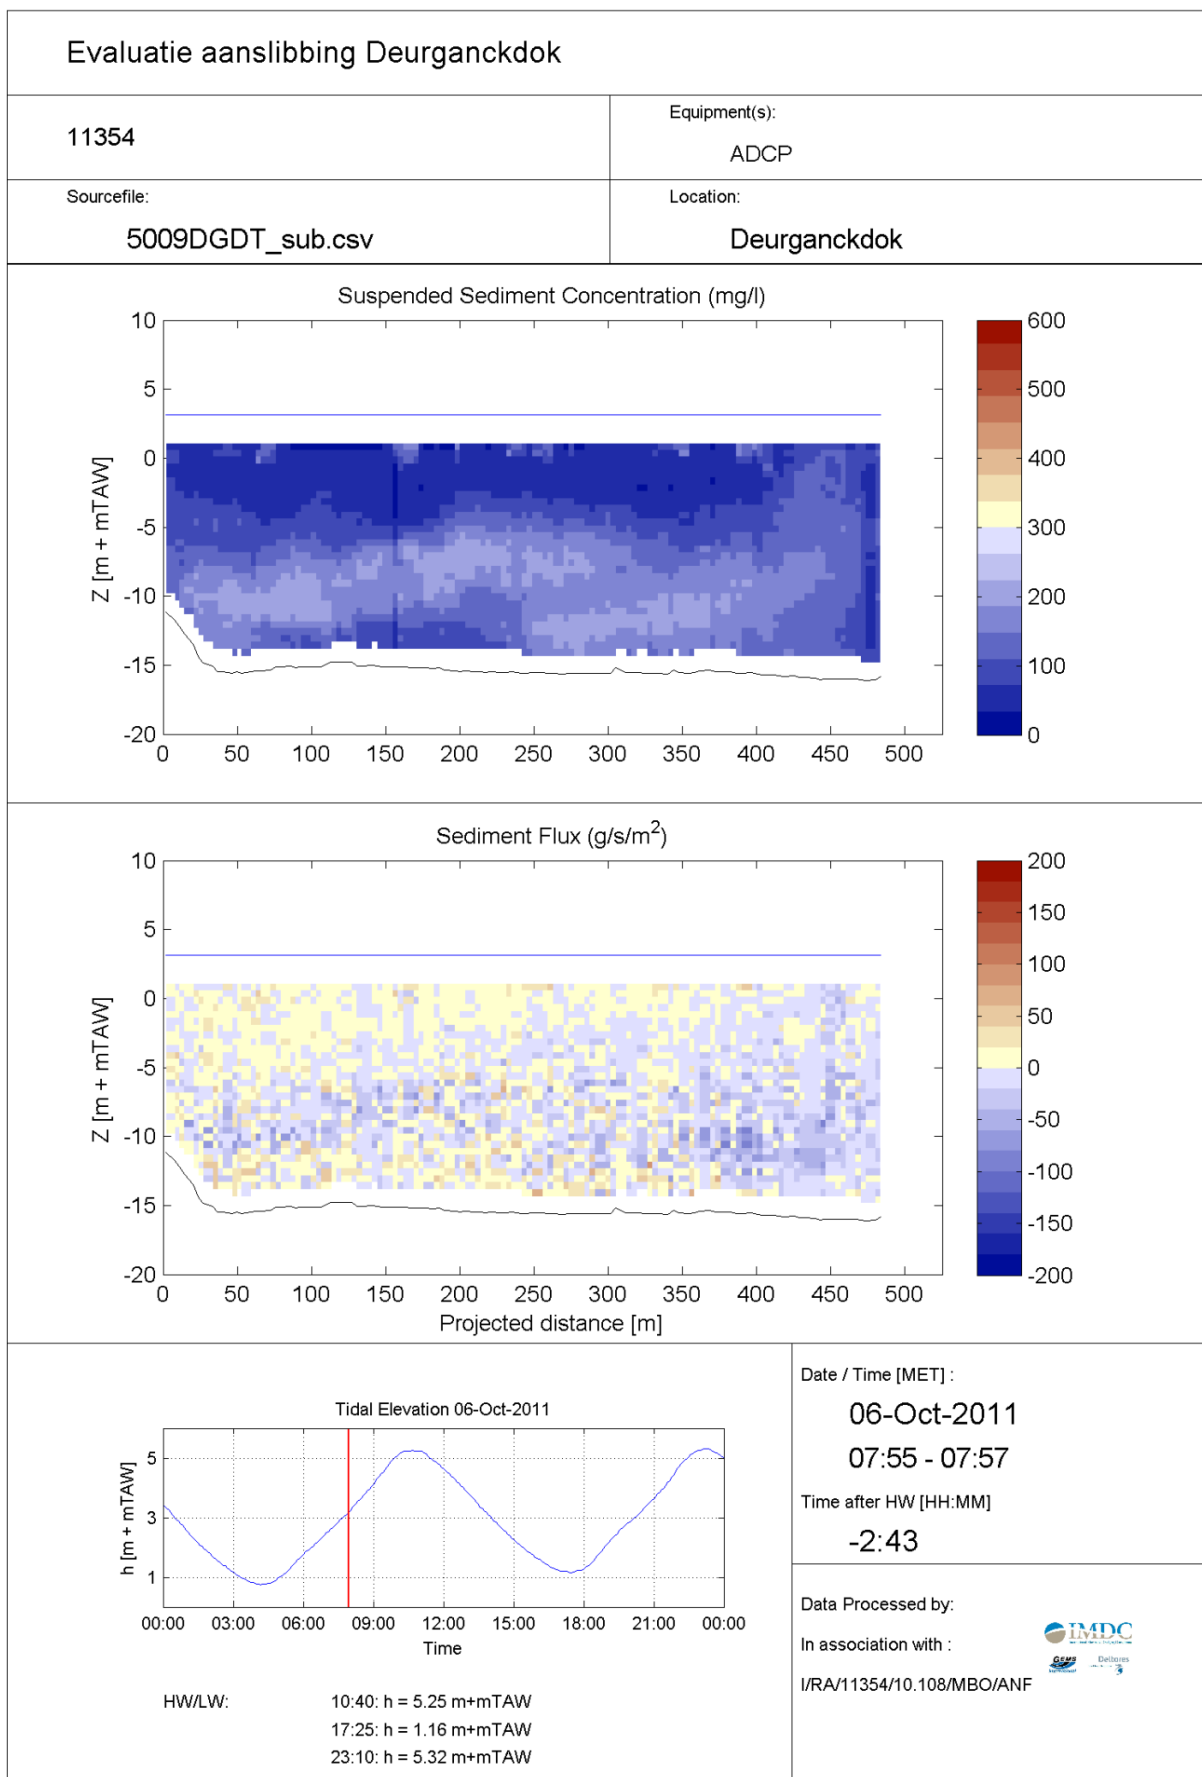

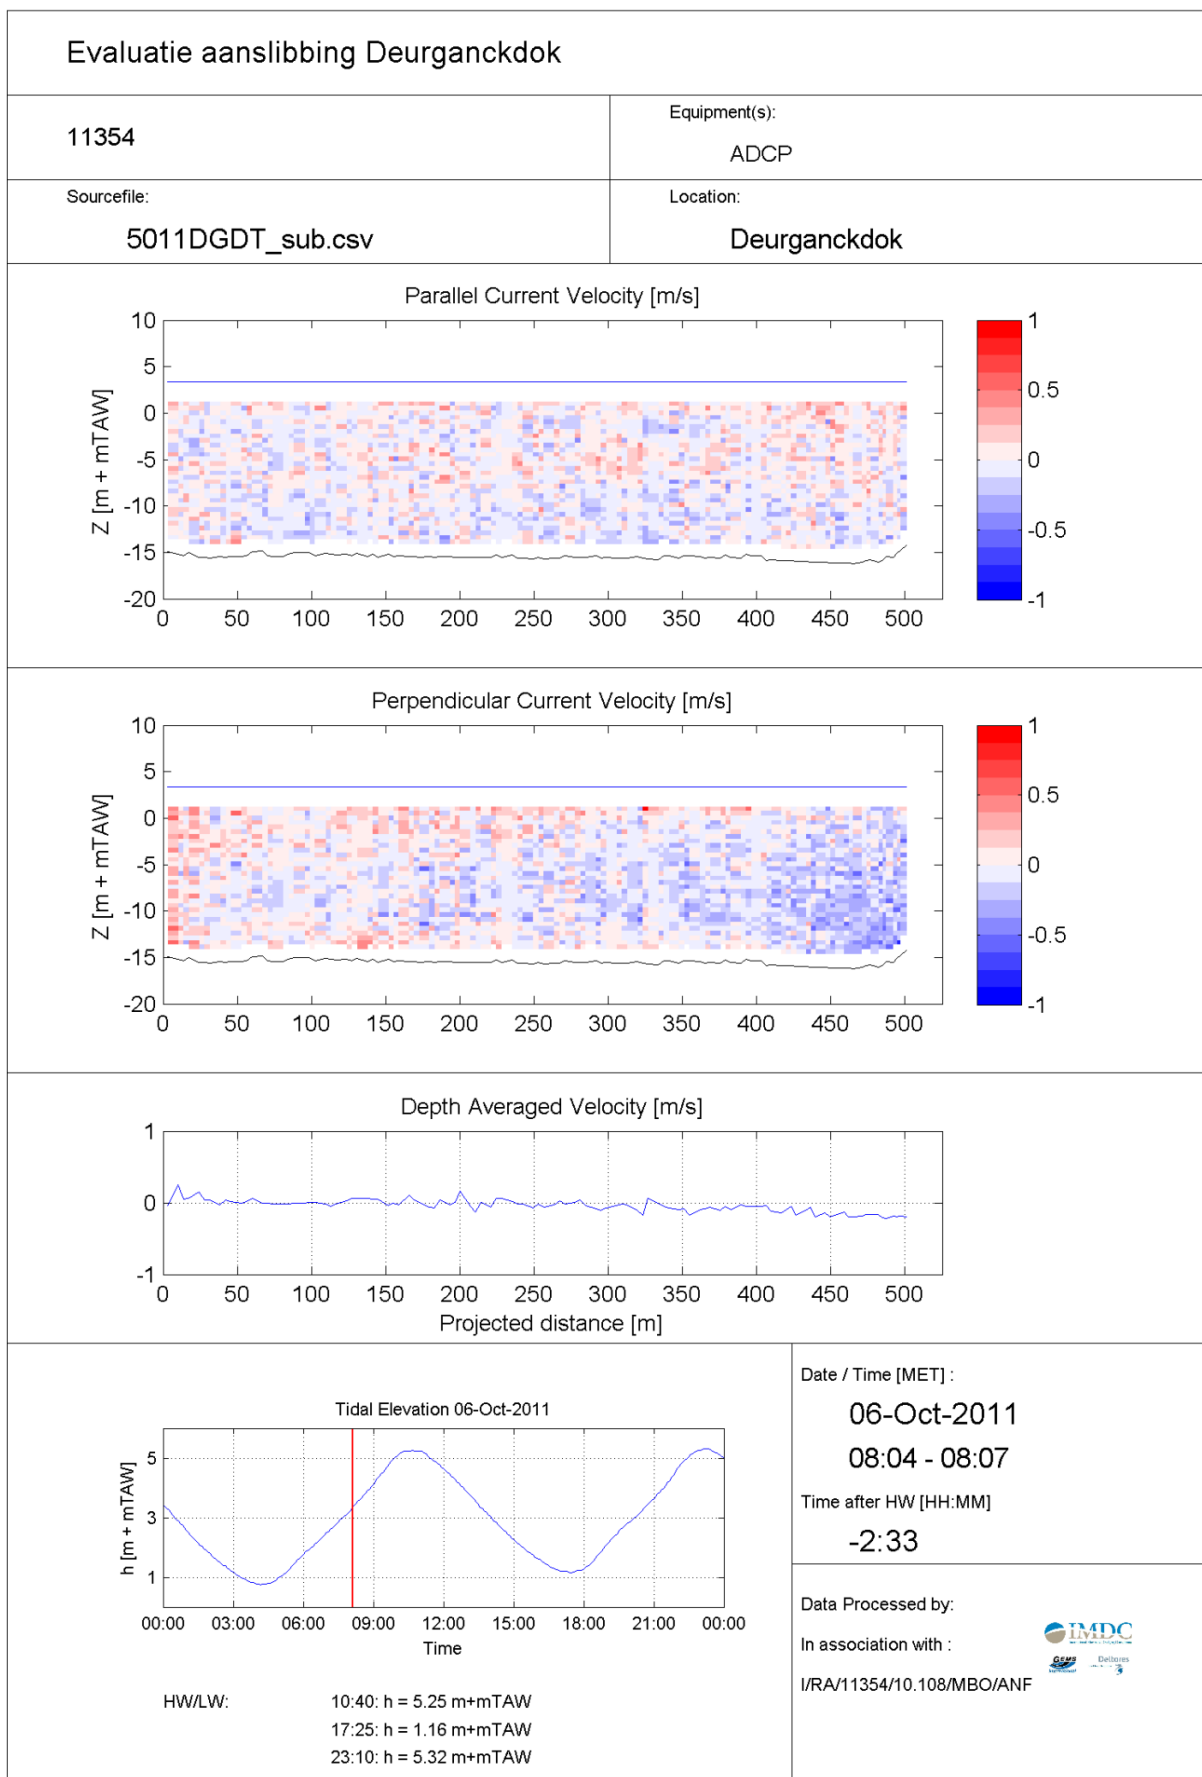

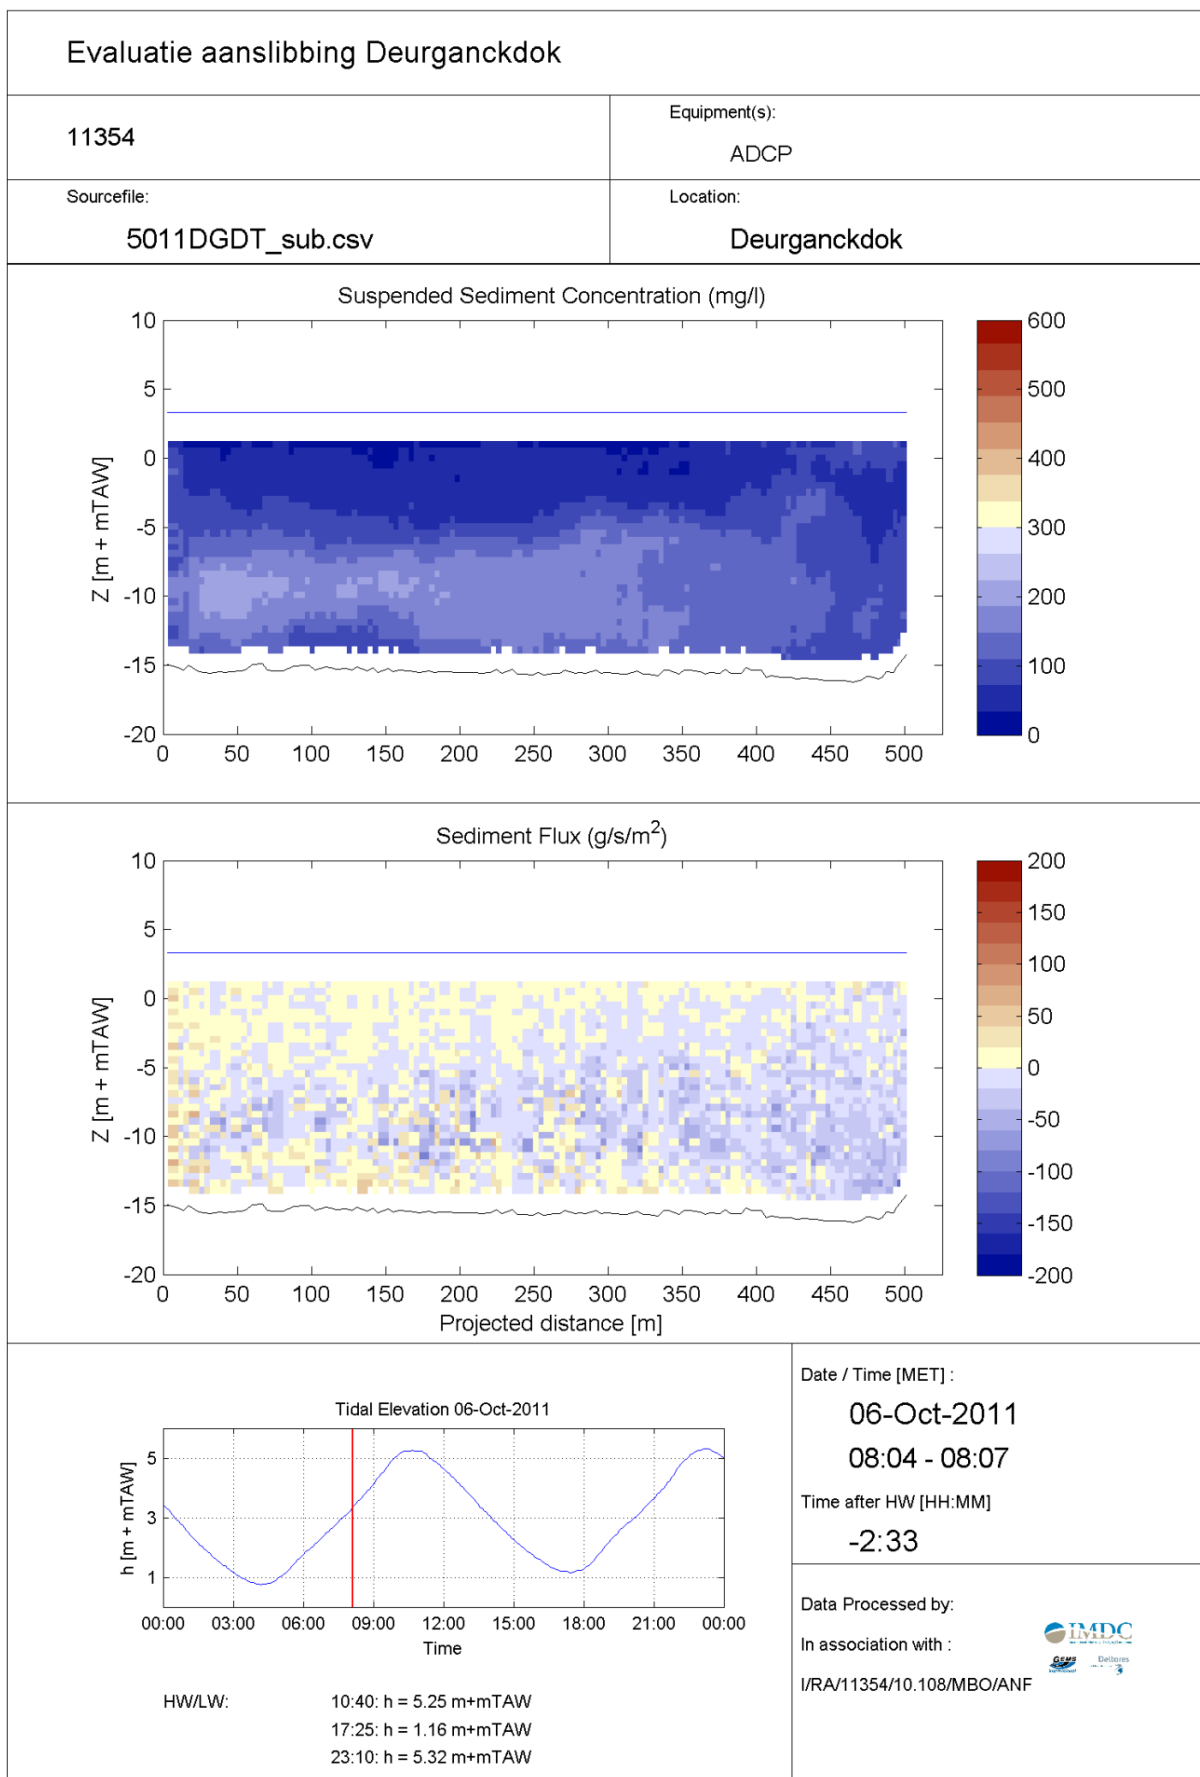

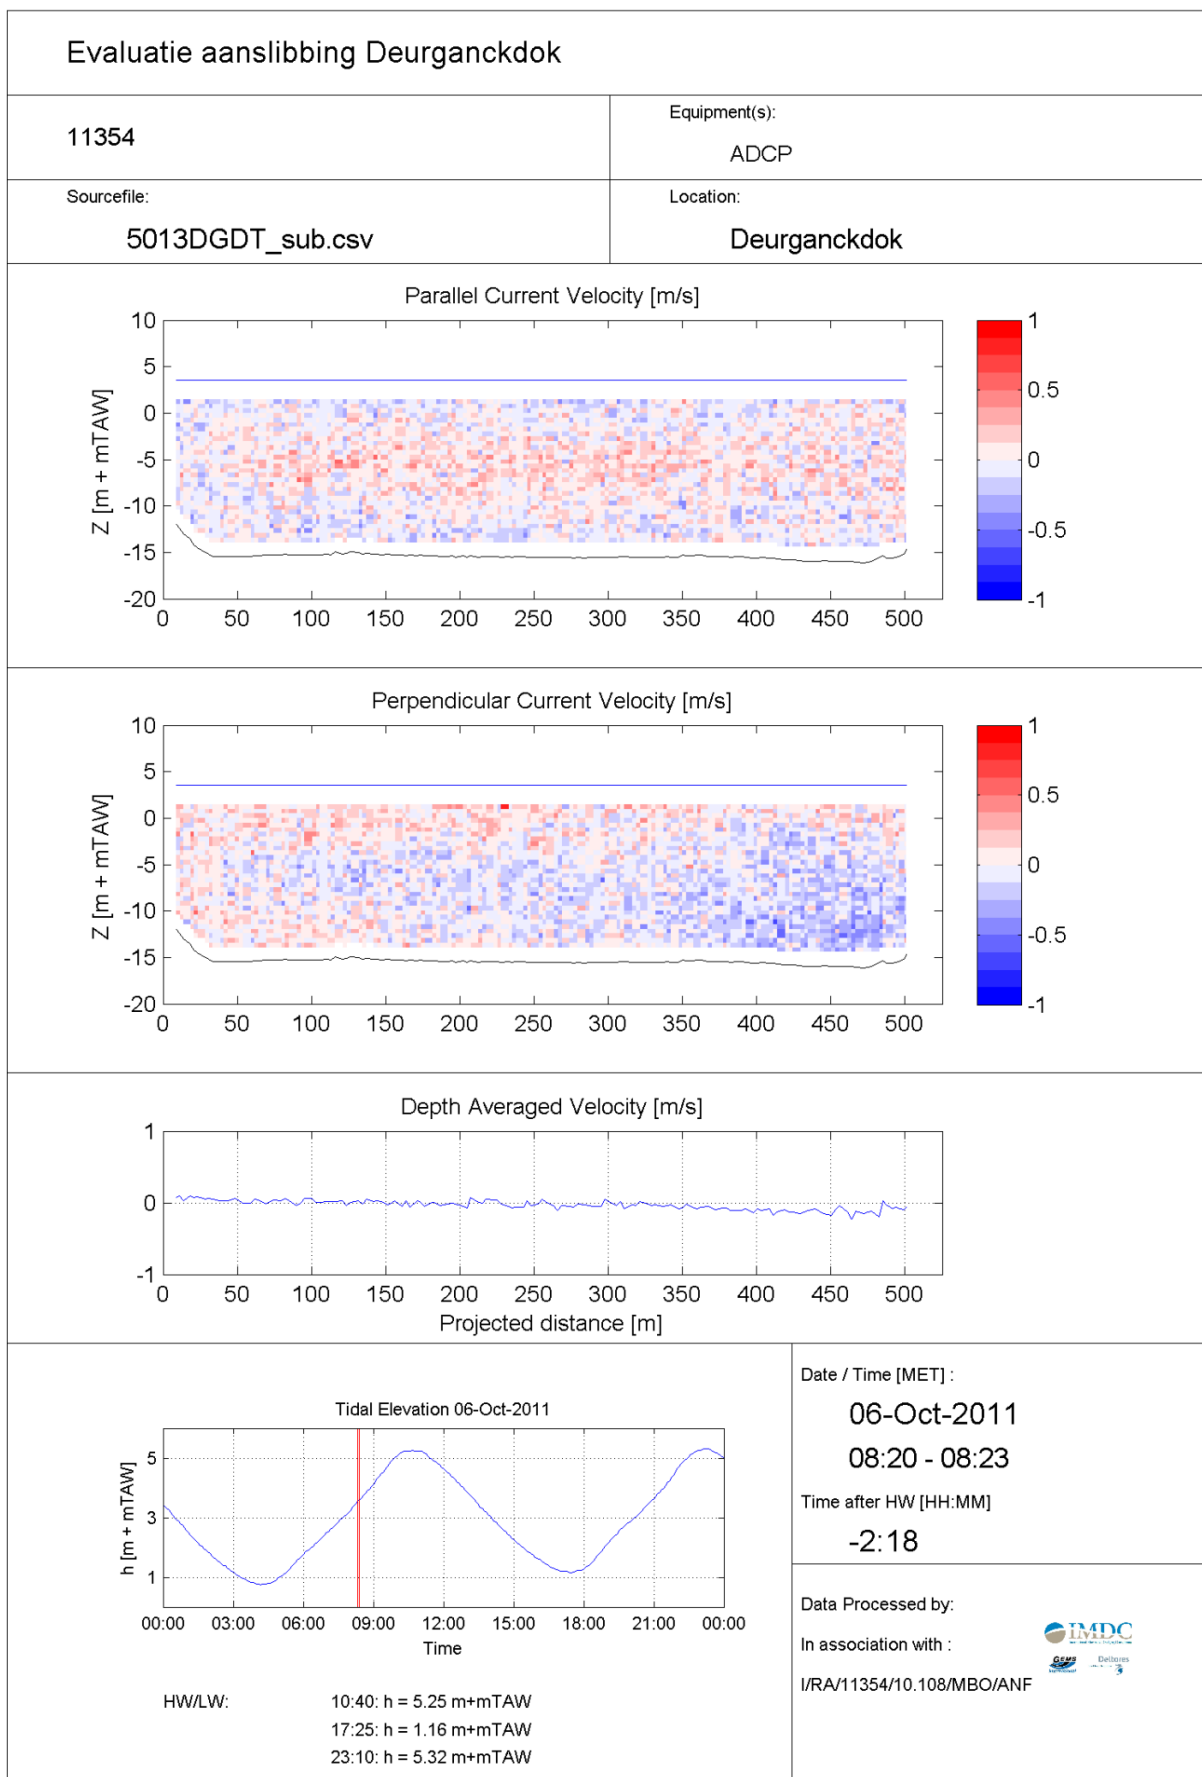

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5013DGDT_sub.csv

Location:

Deurganckdok

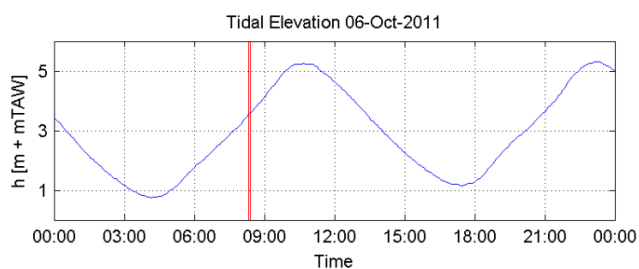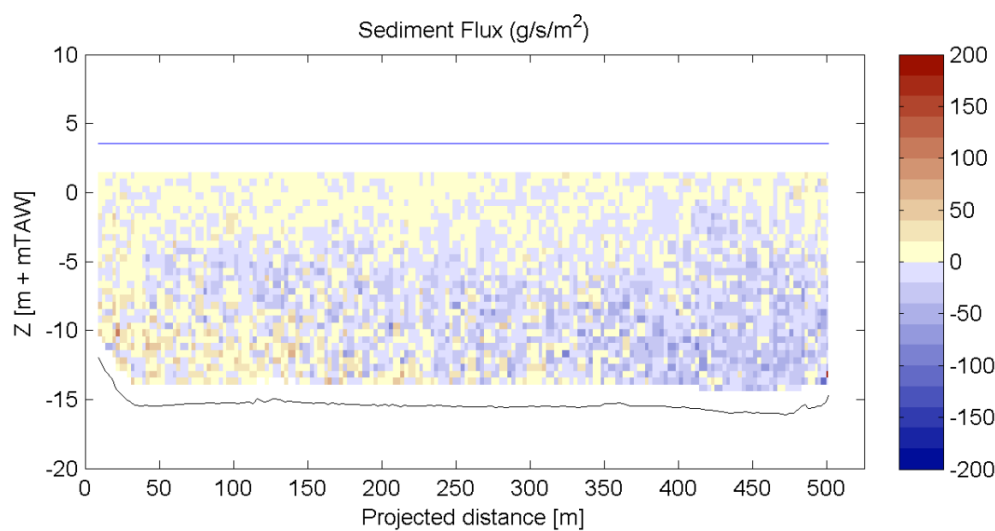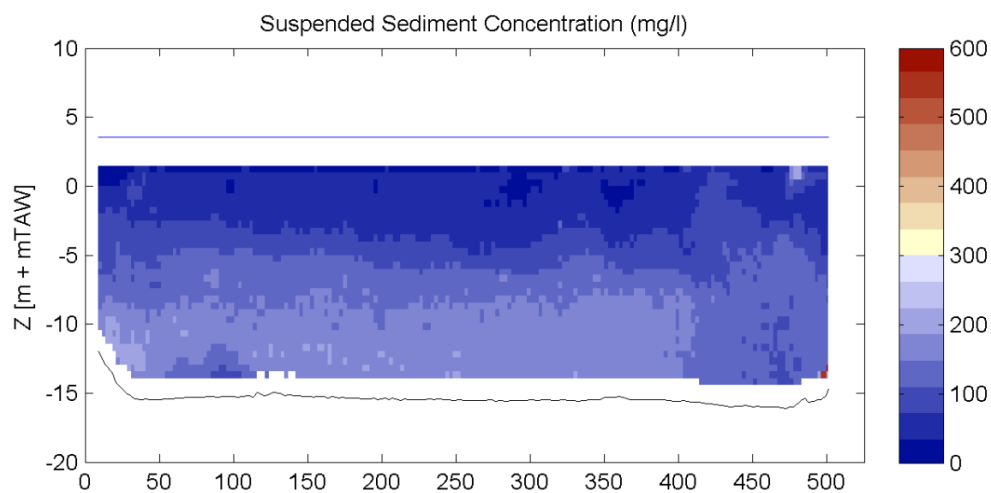

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

08:20 - 08:23

Time after HW [HH:MM]


-2:18


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




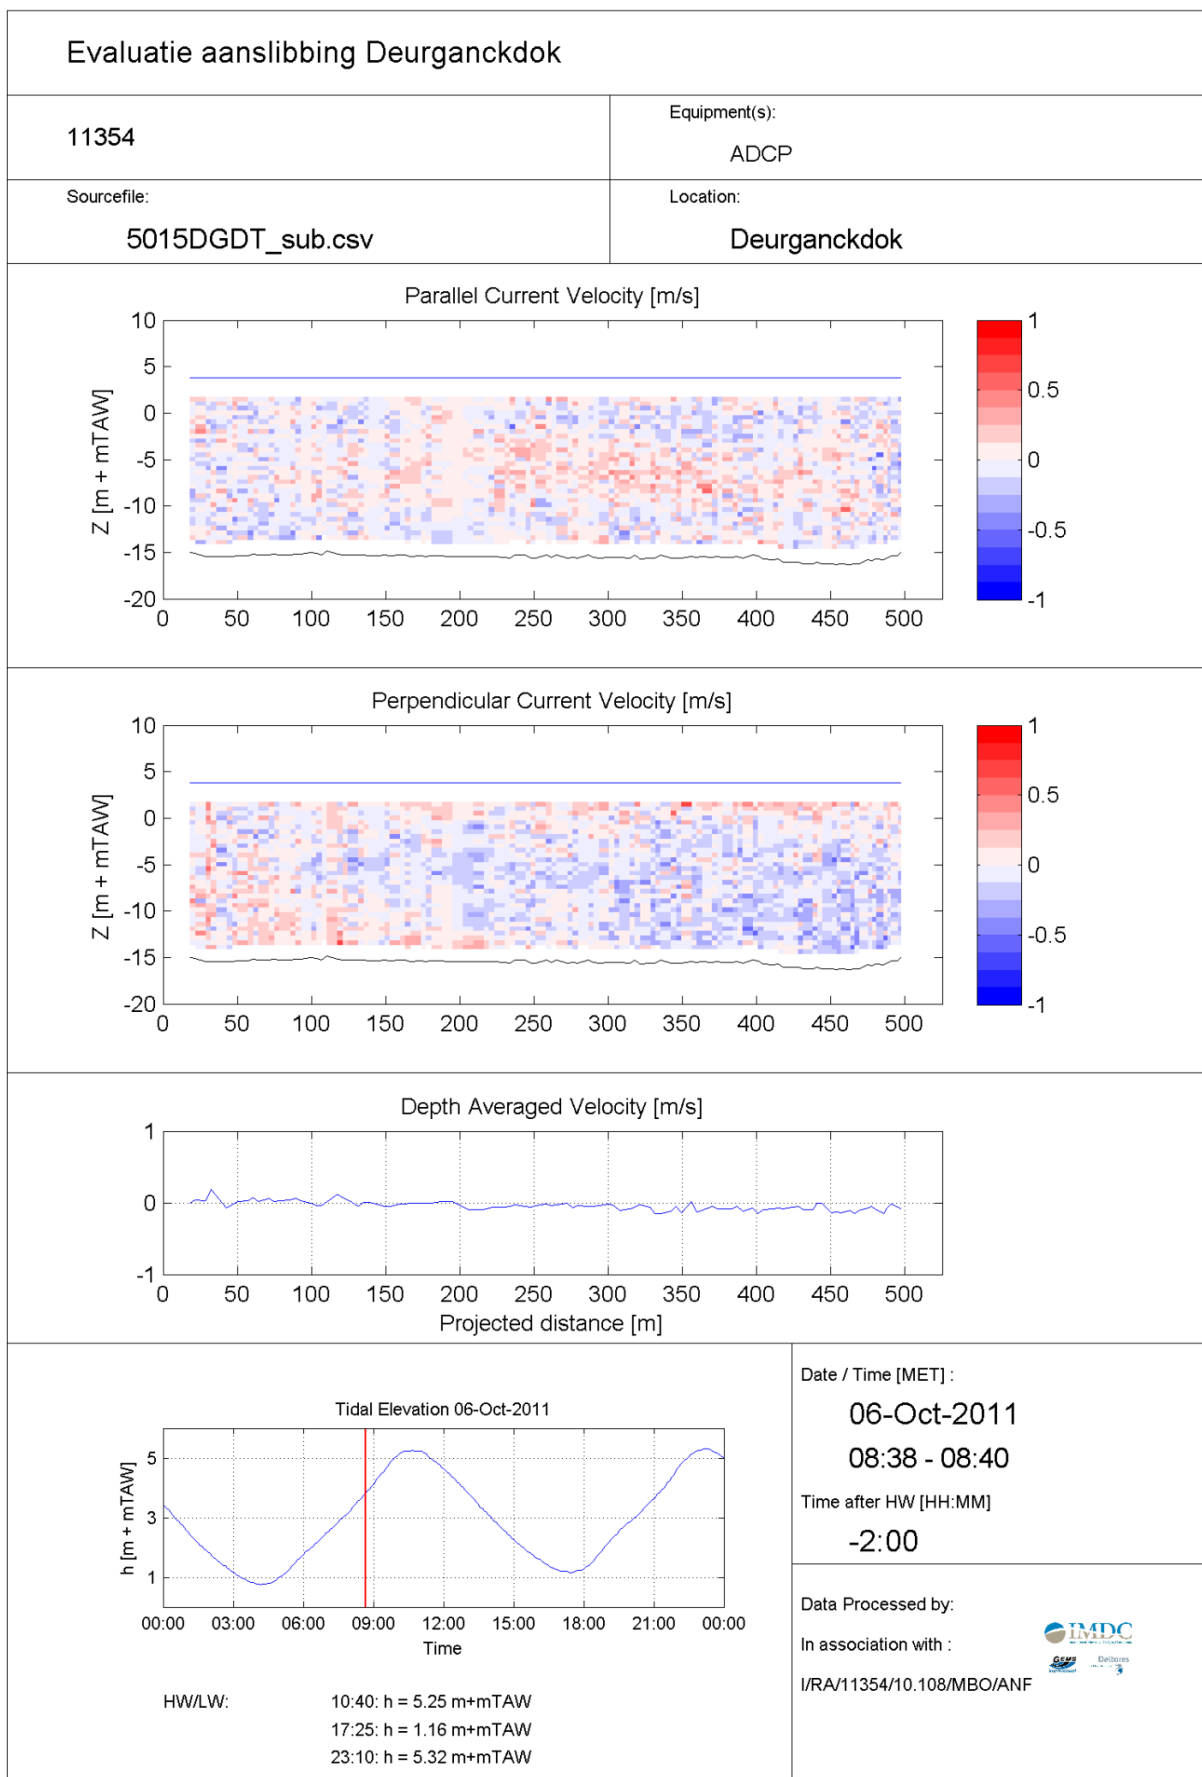


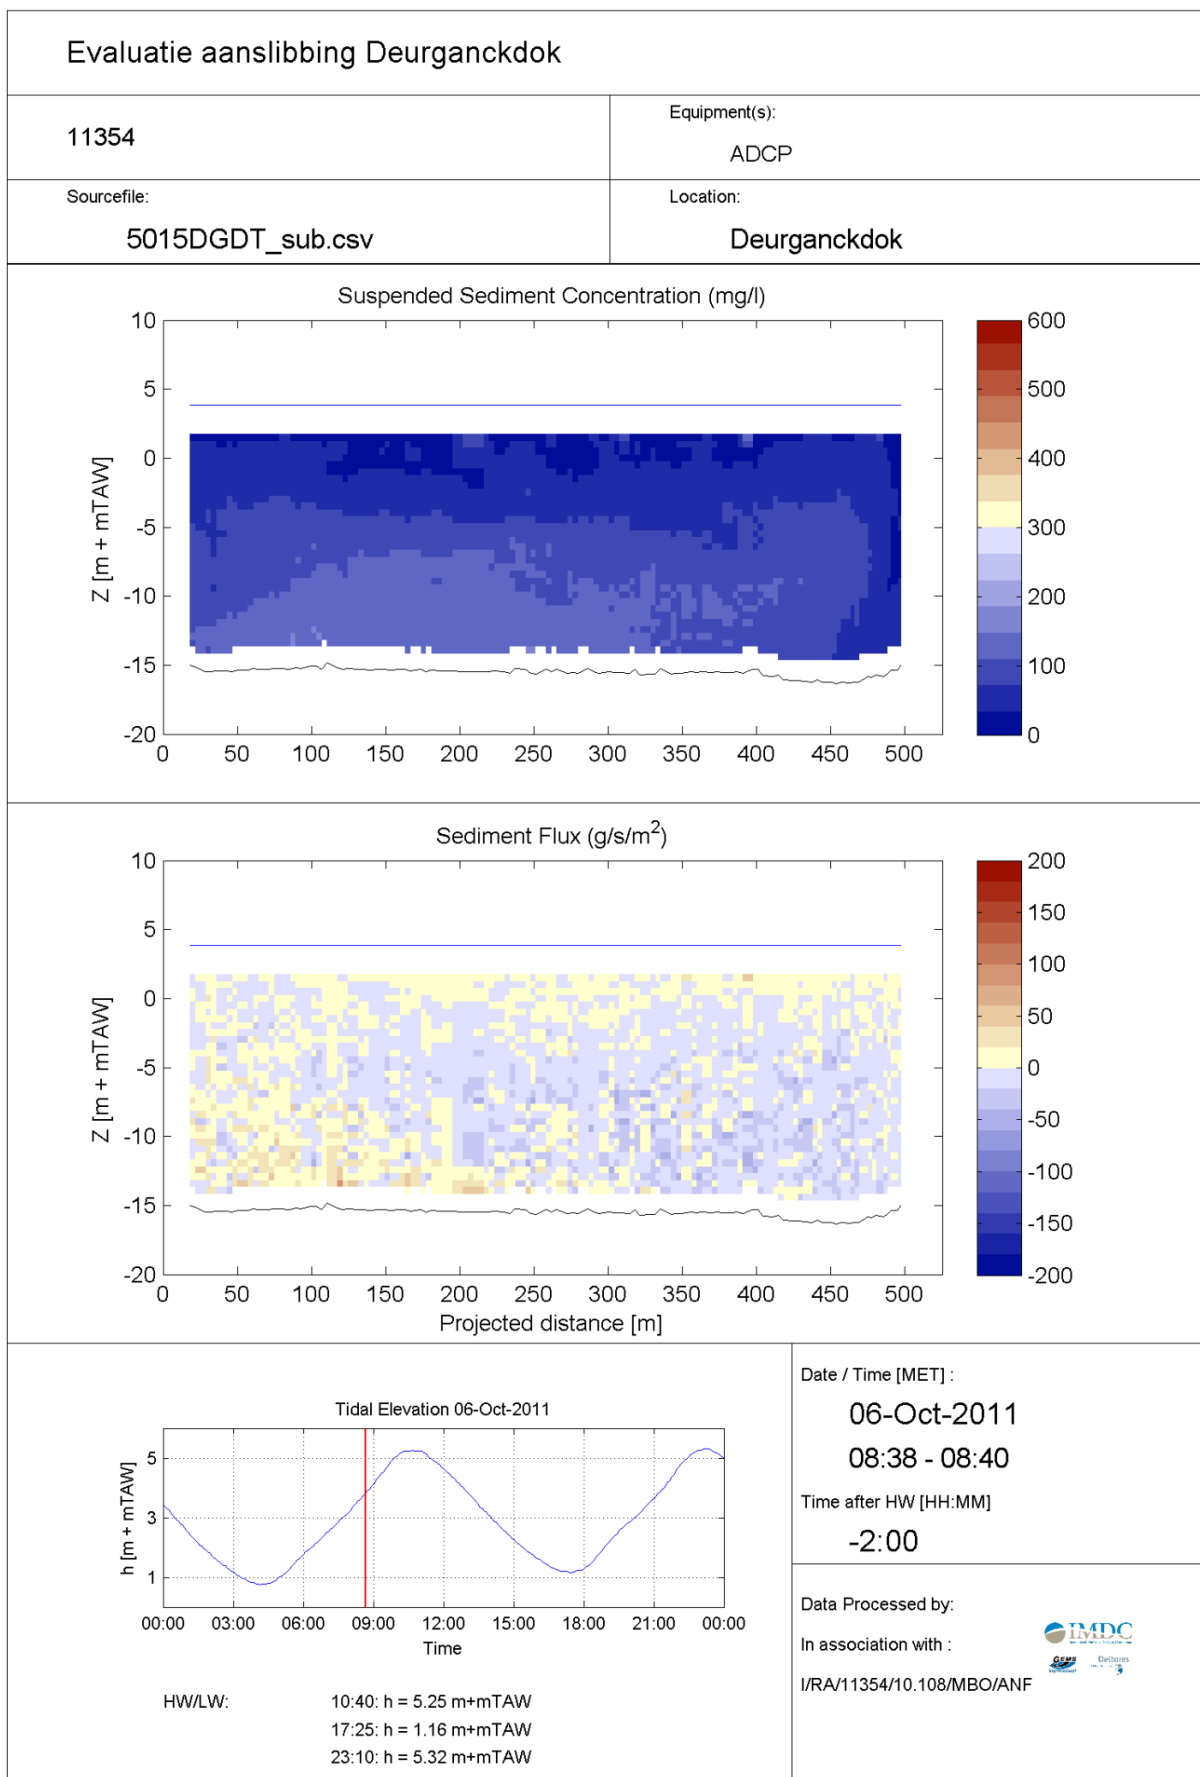


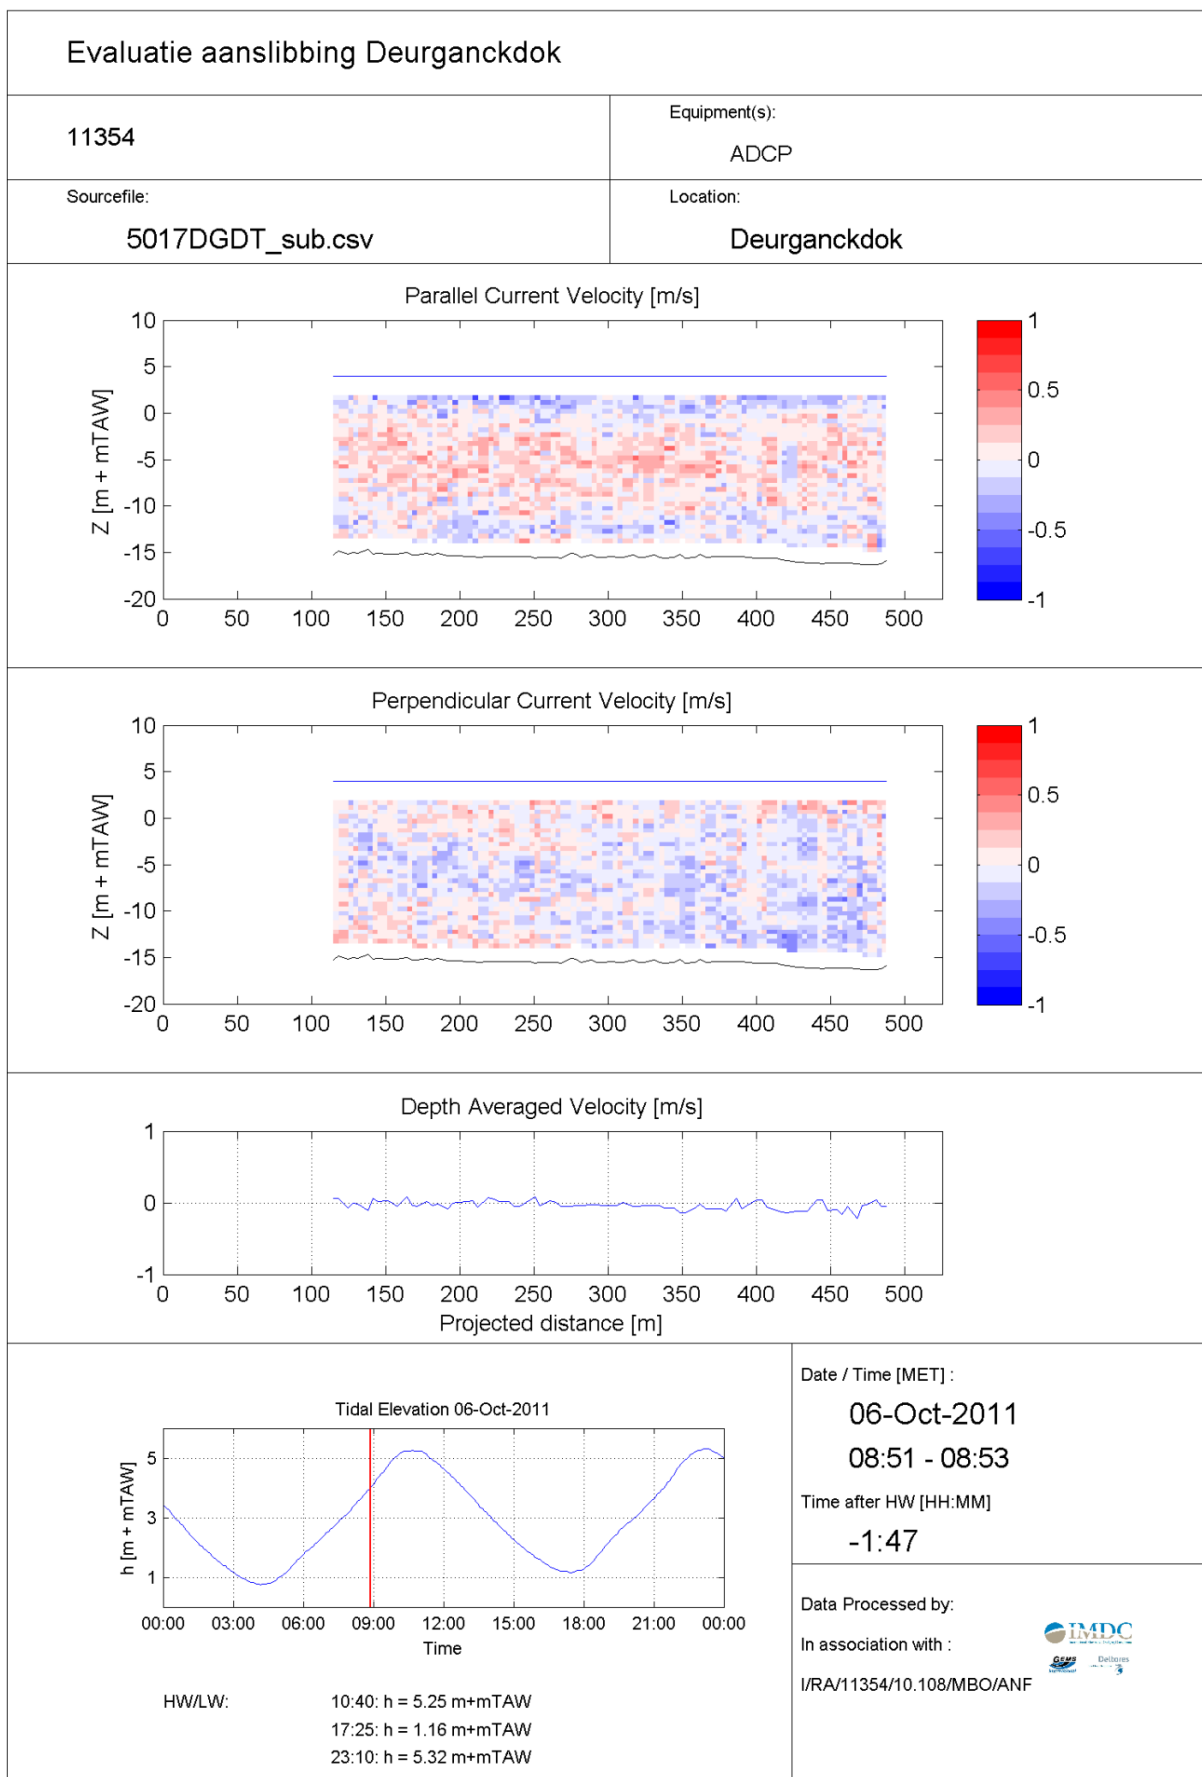


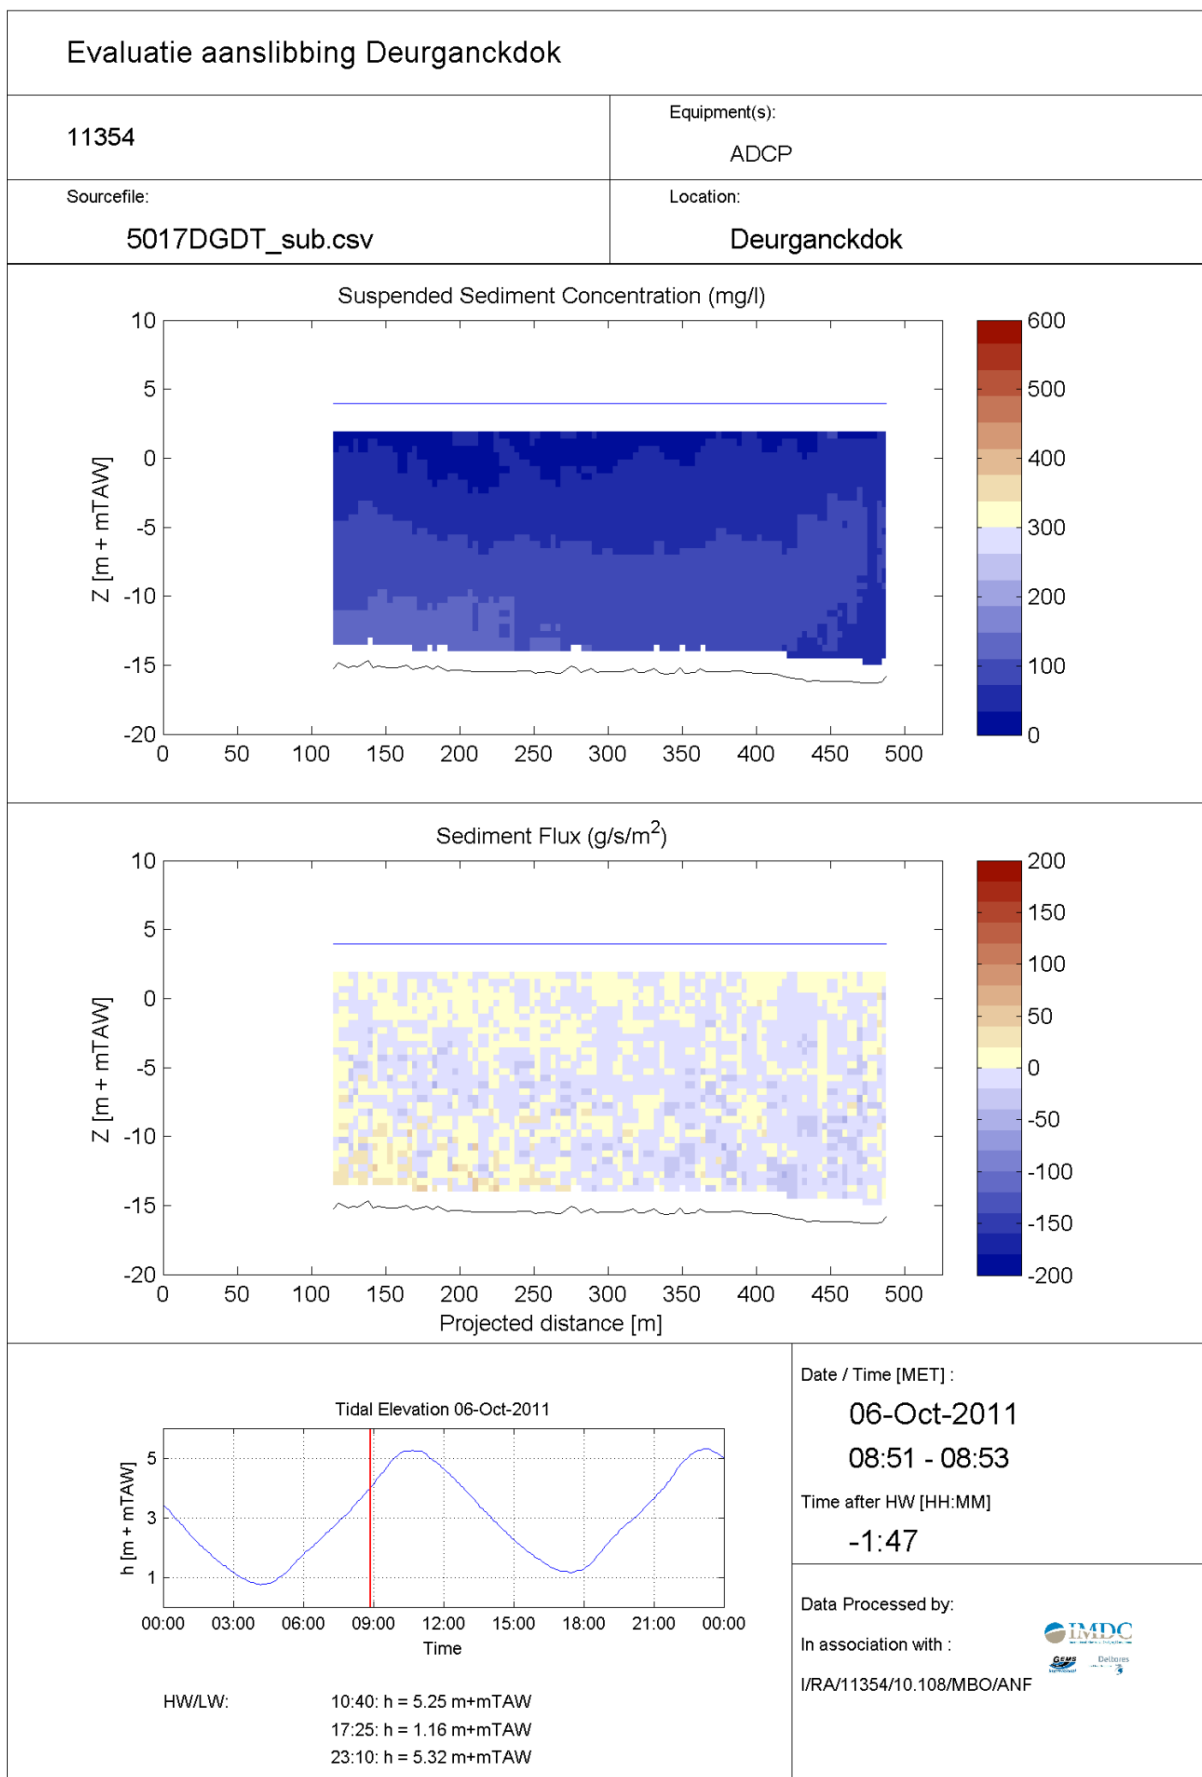


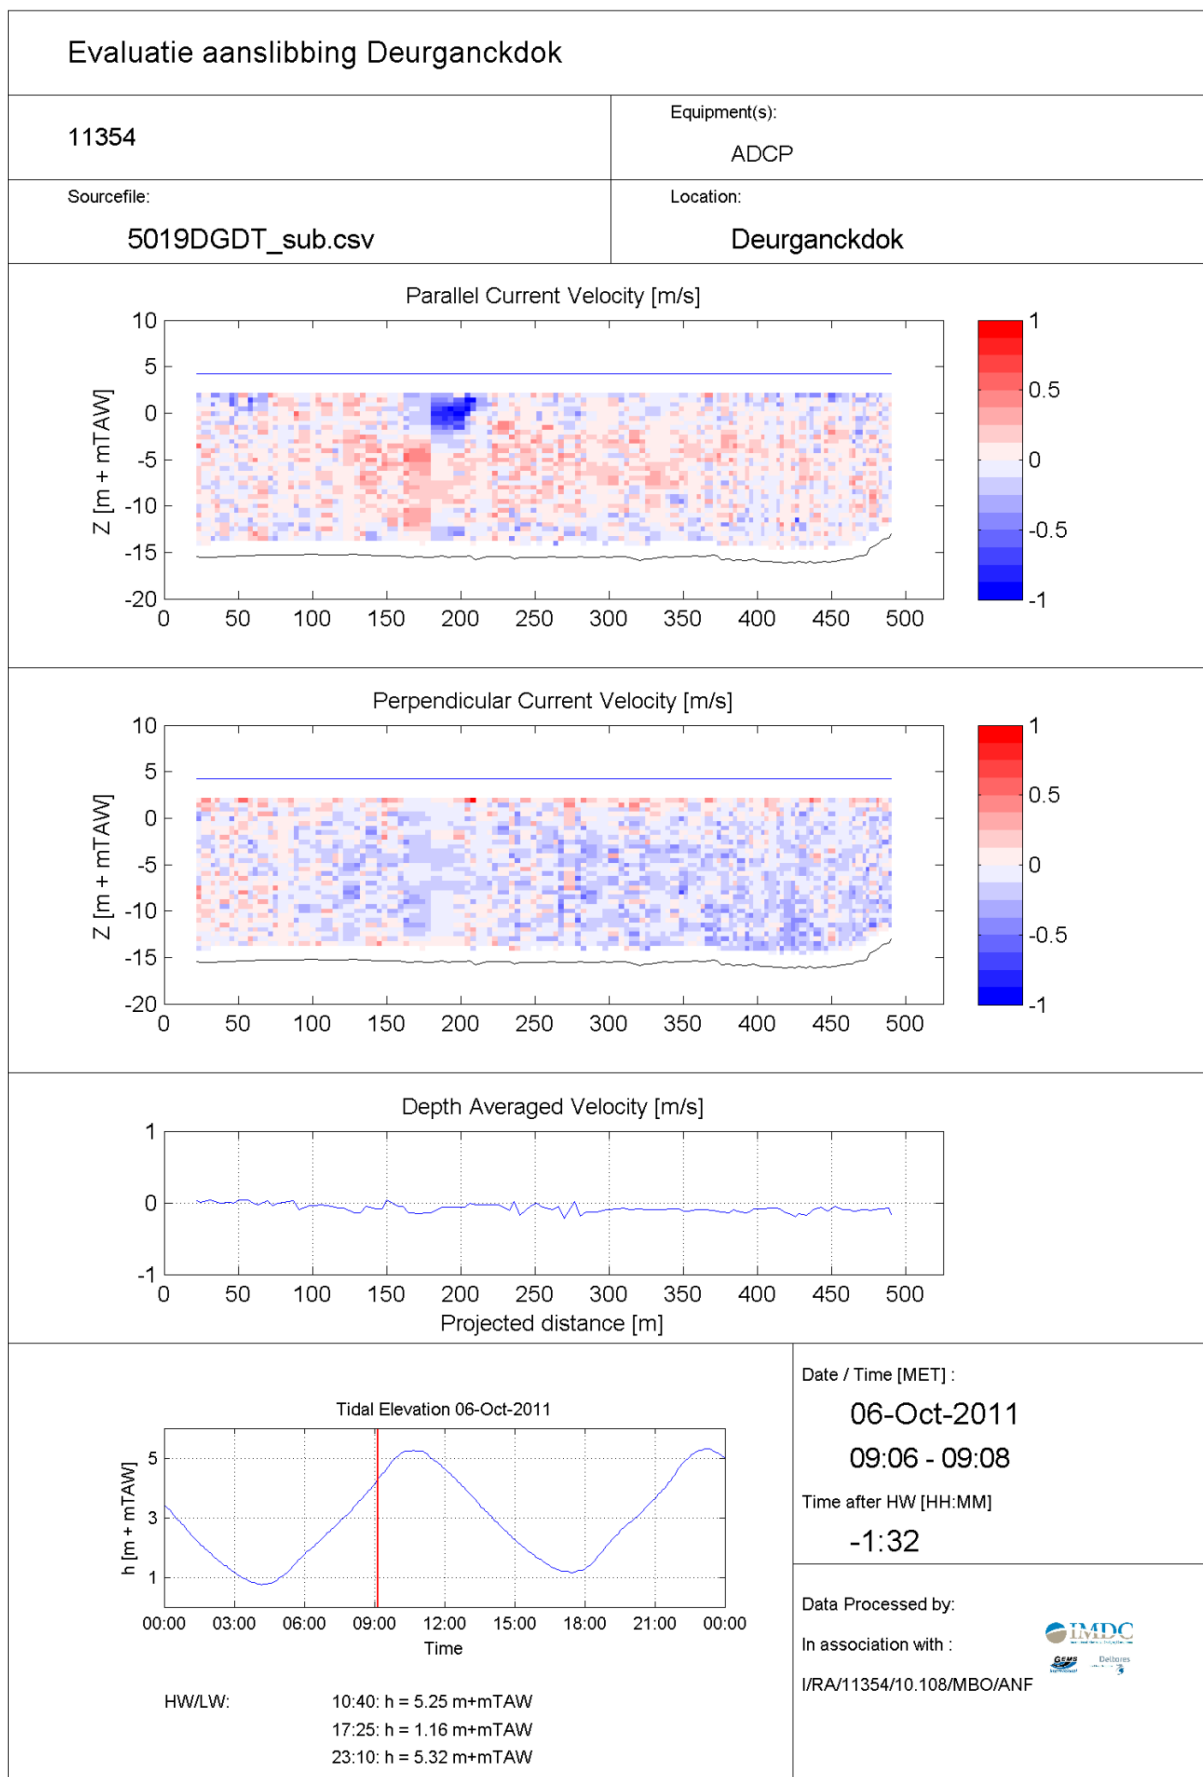

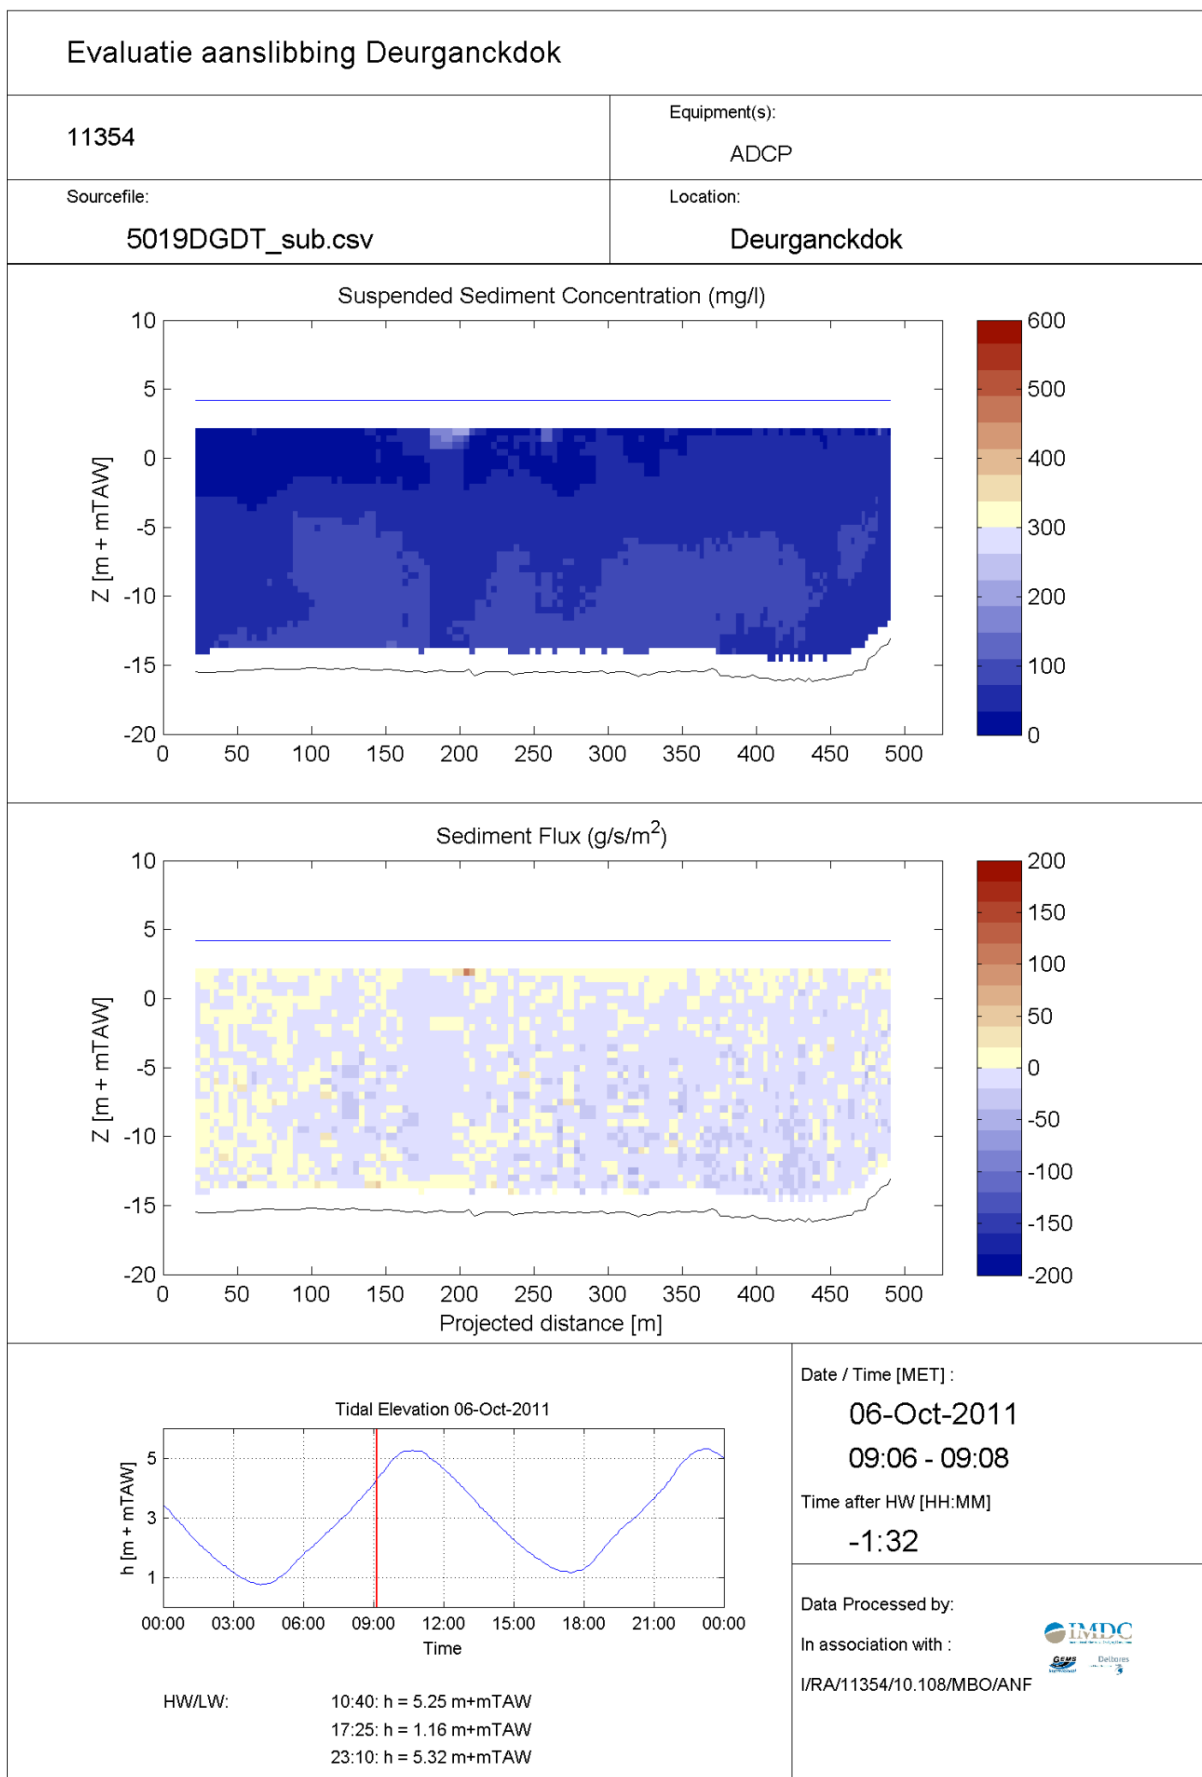

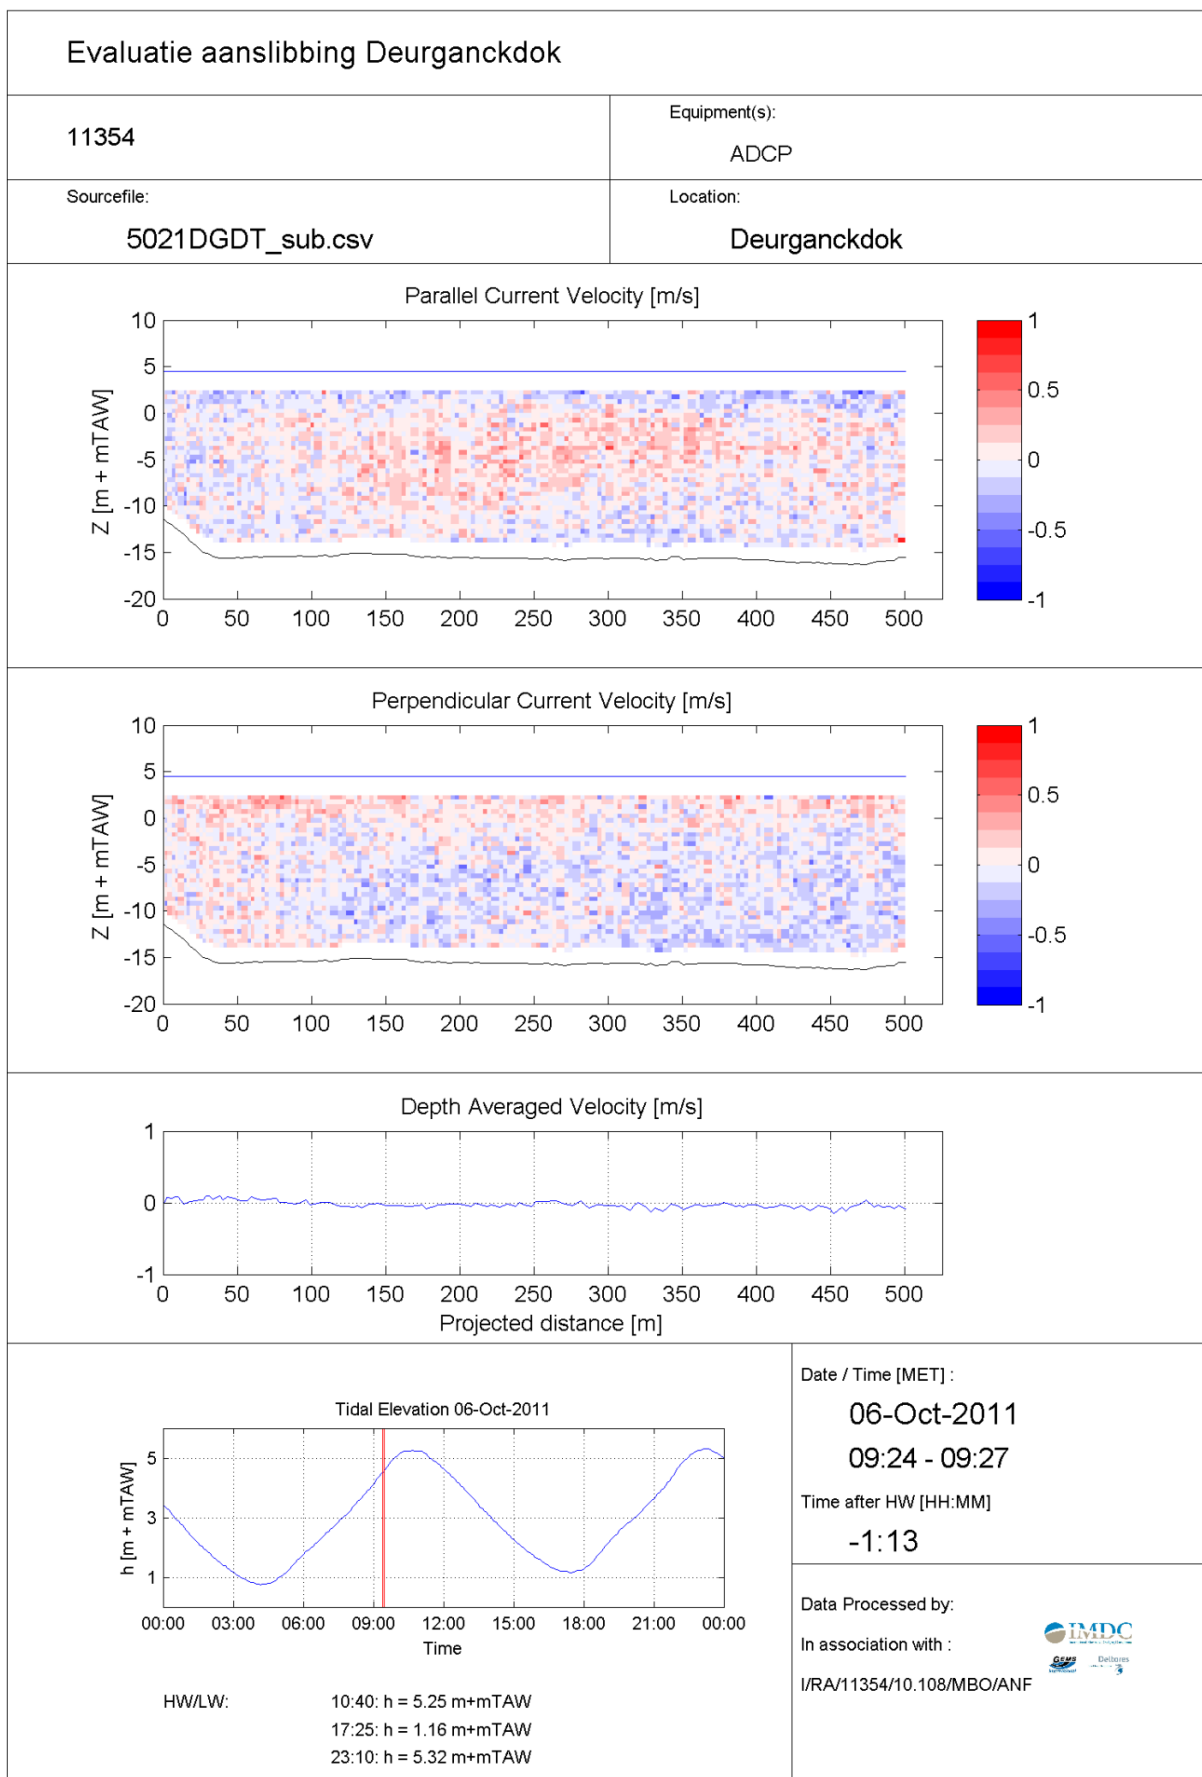

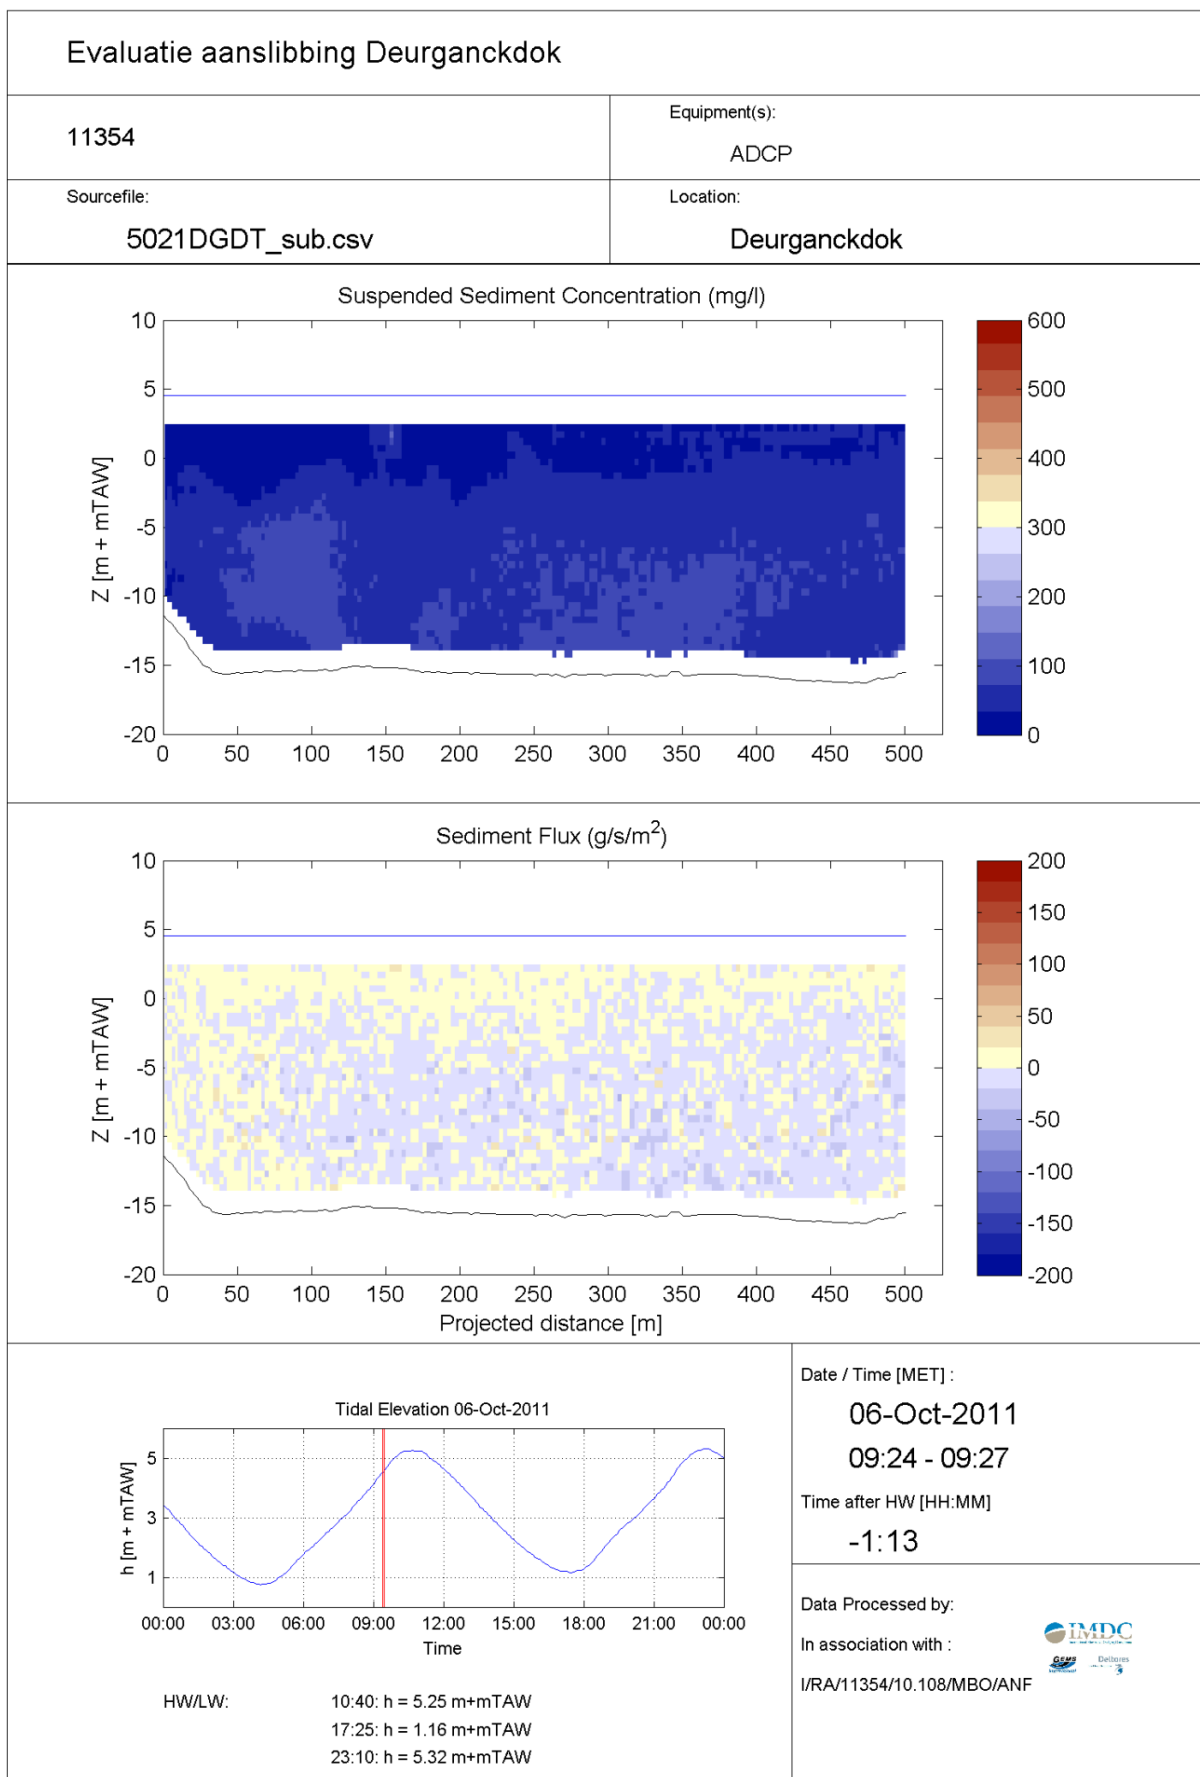

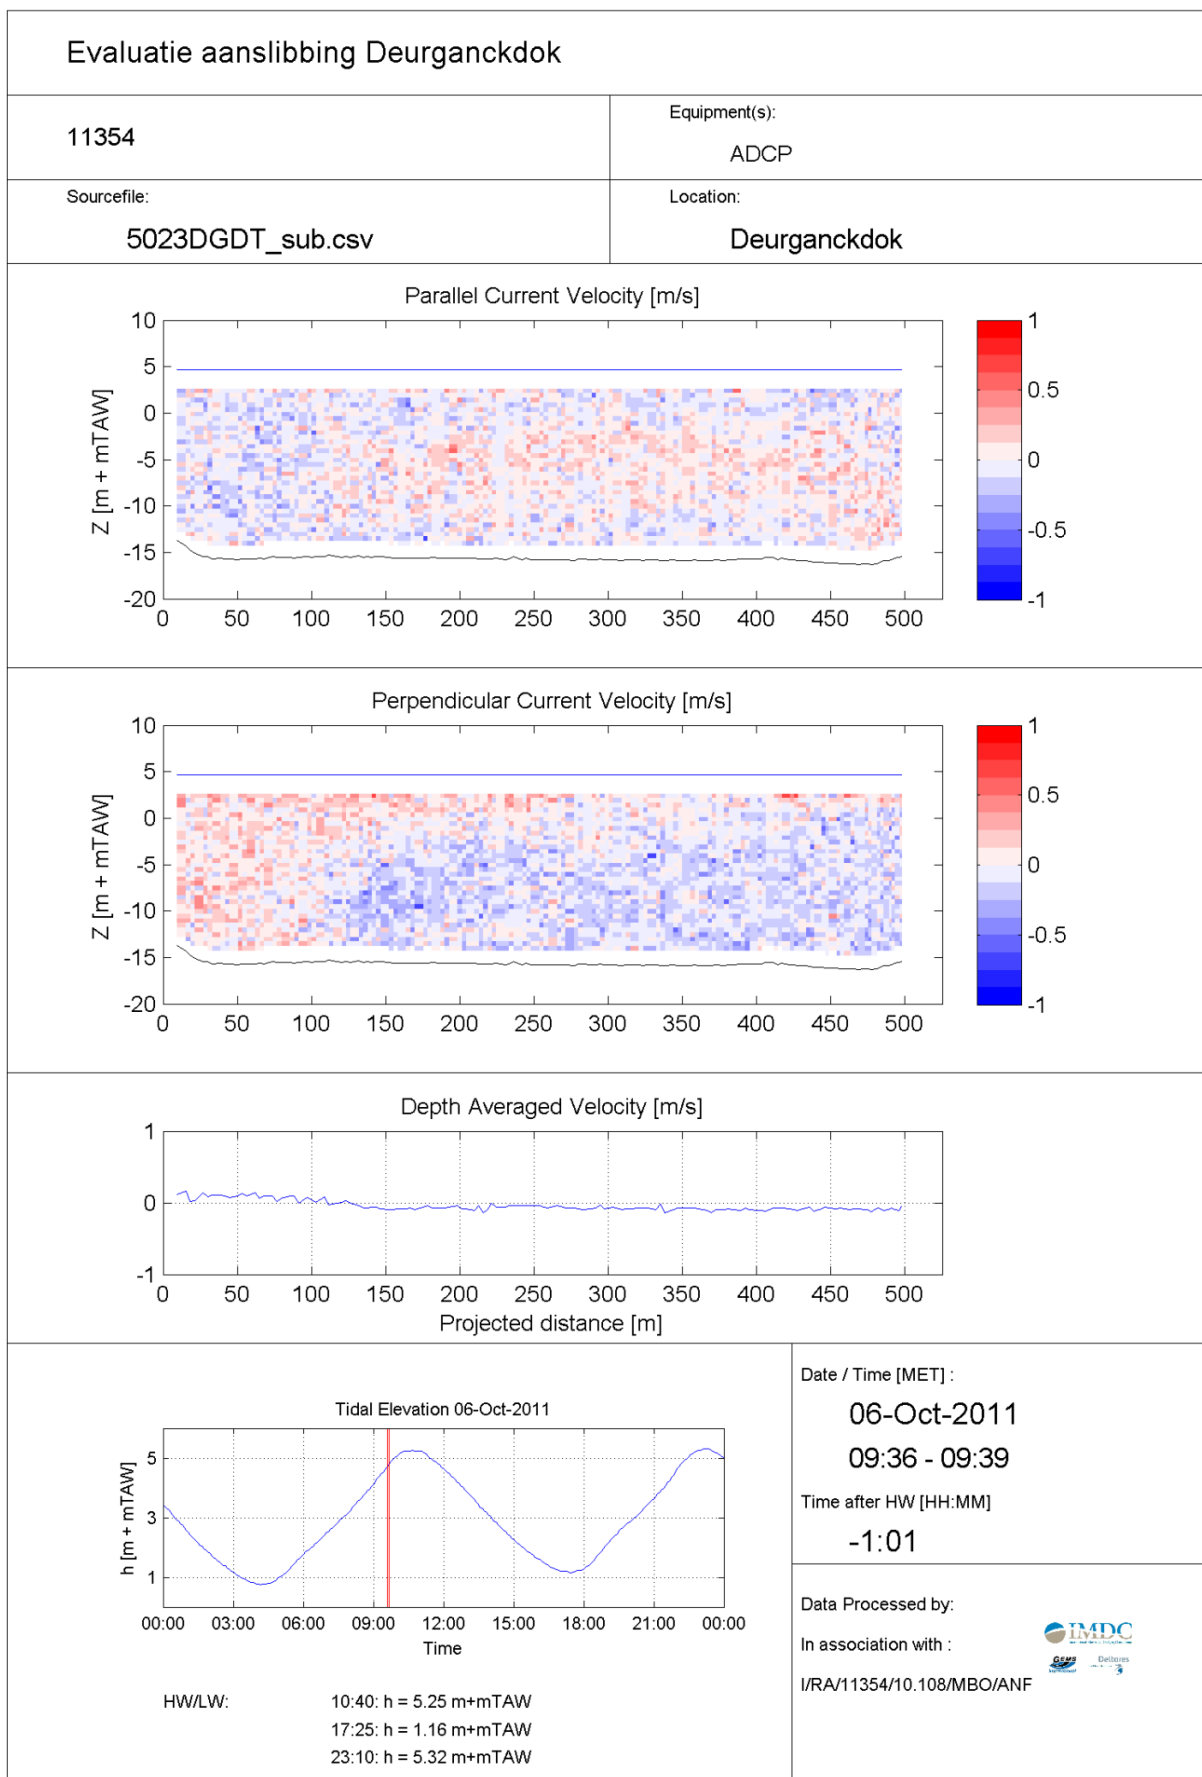

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5023DGDT_sub.csv

Location:

Deurganckdok

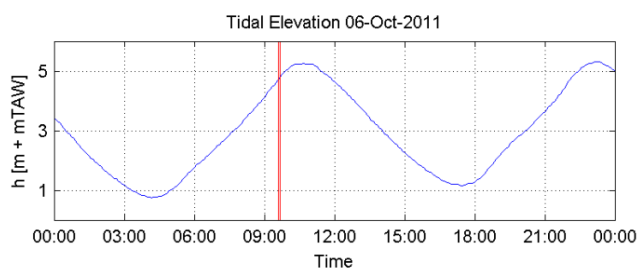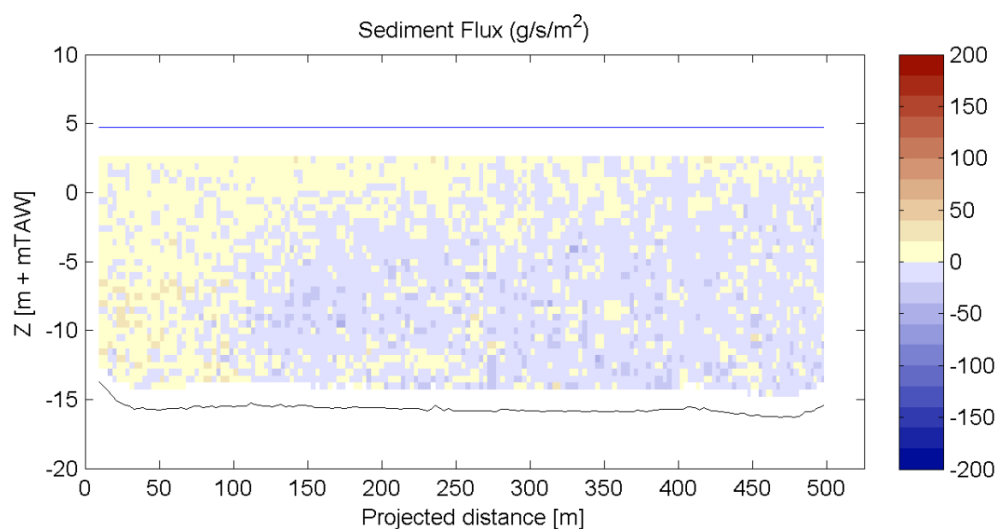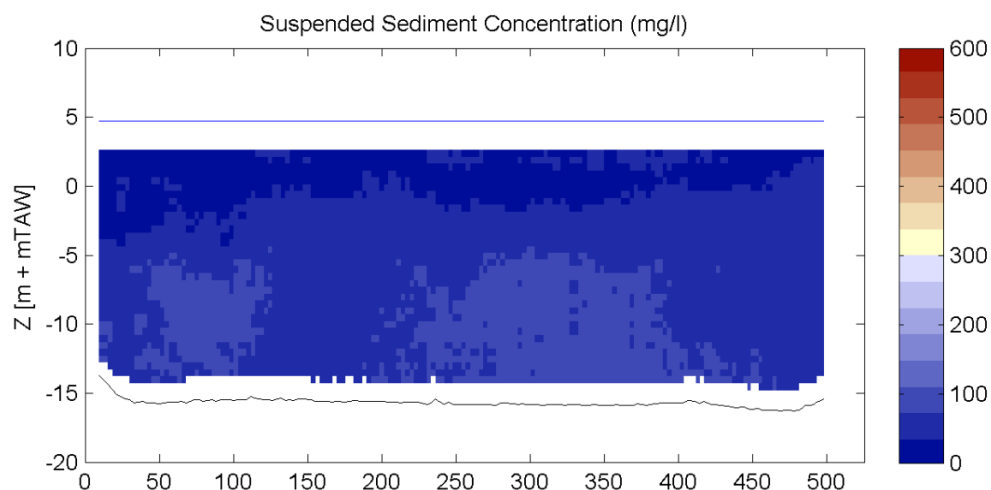

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

09:36 - 09:39

Time after HW [HH:MM]


-1:01


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




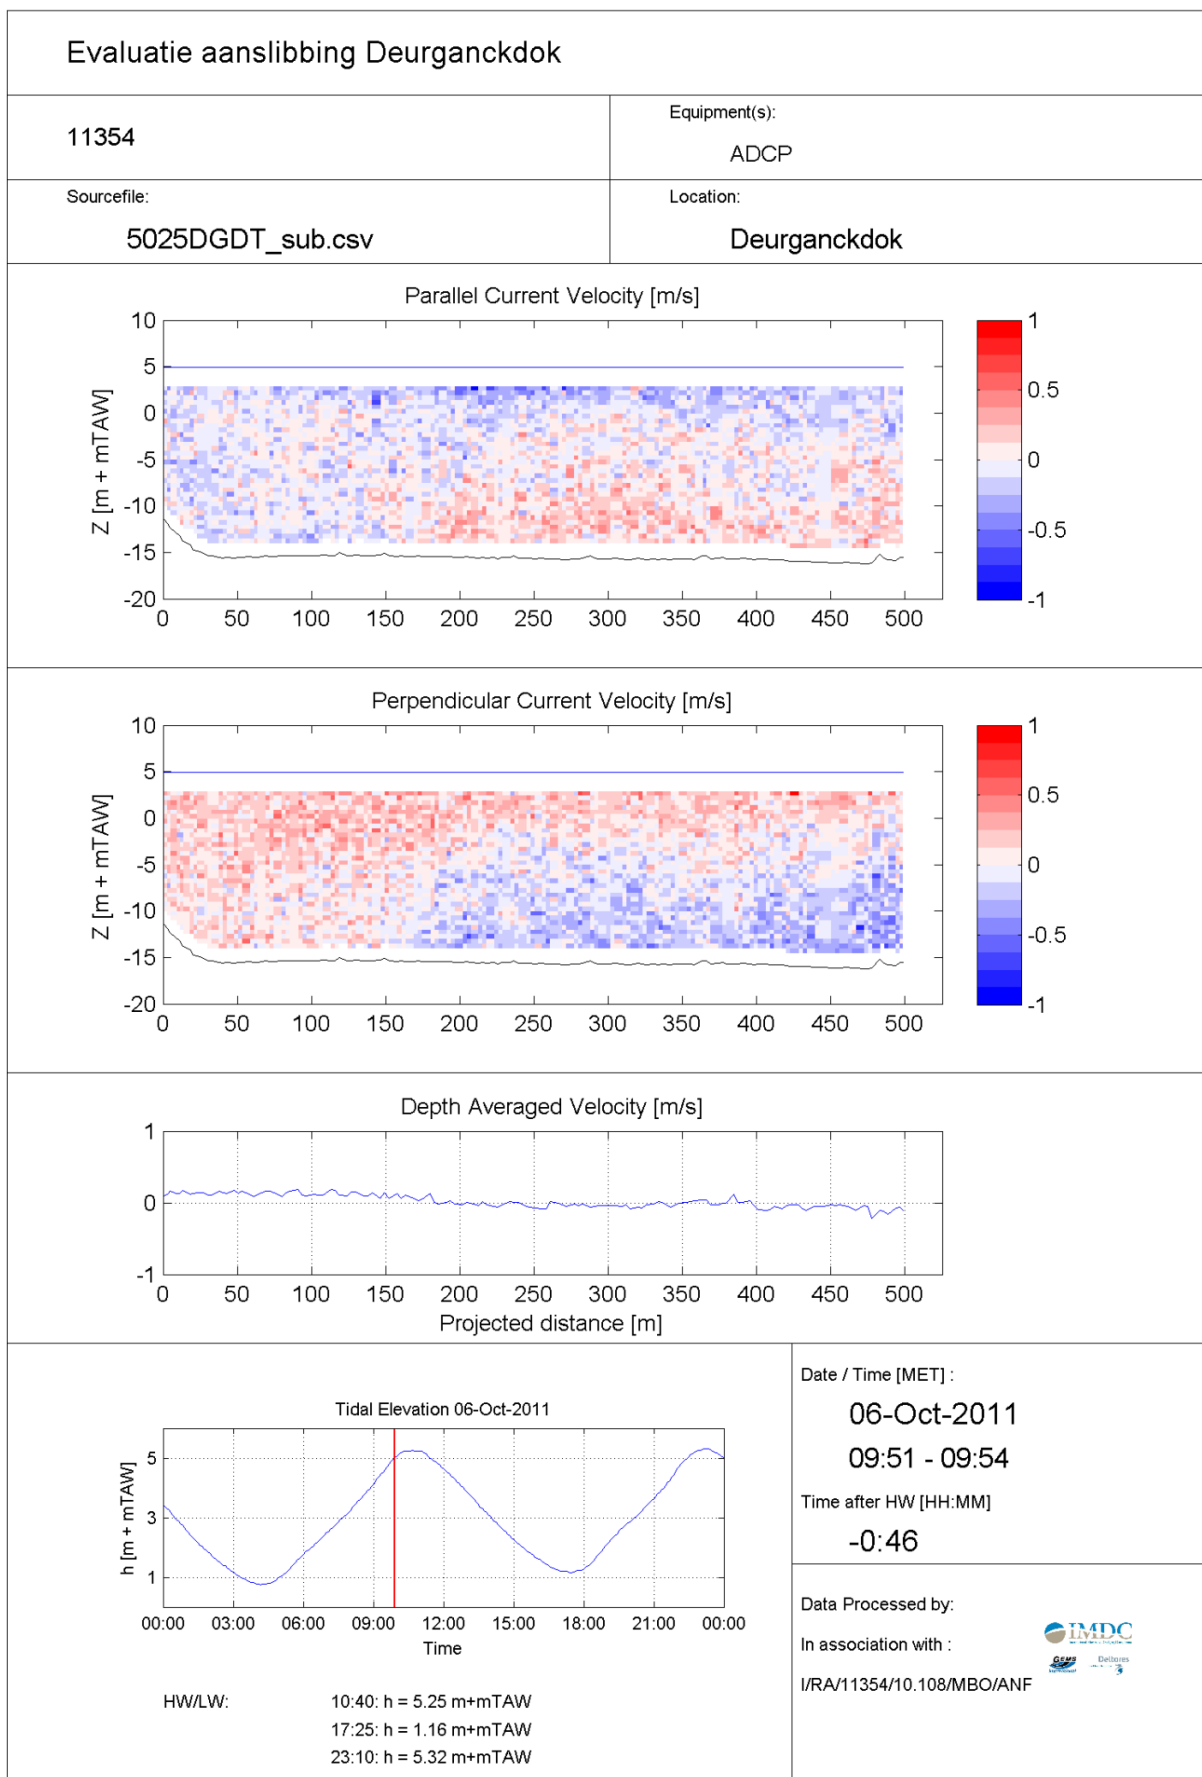


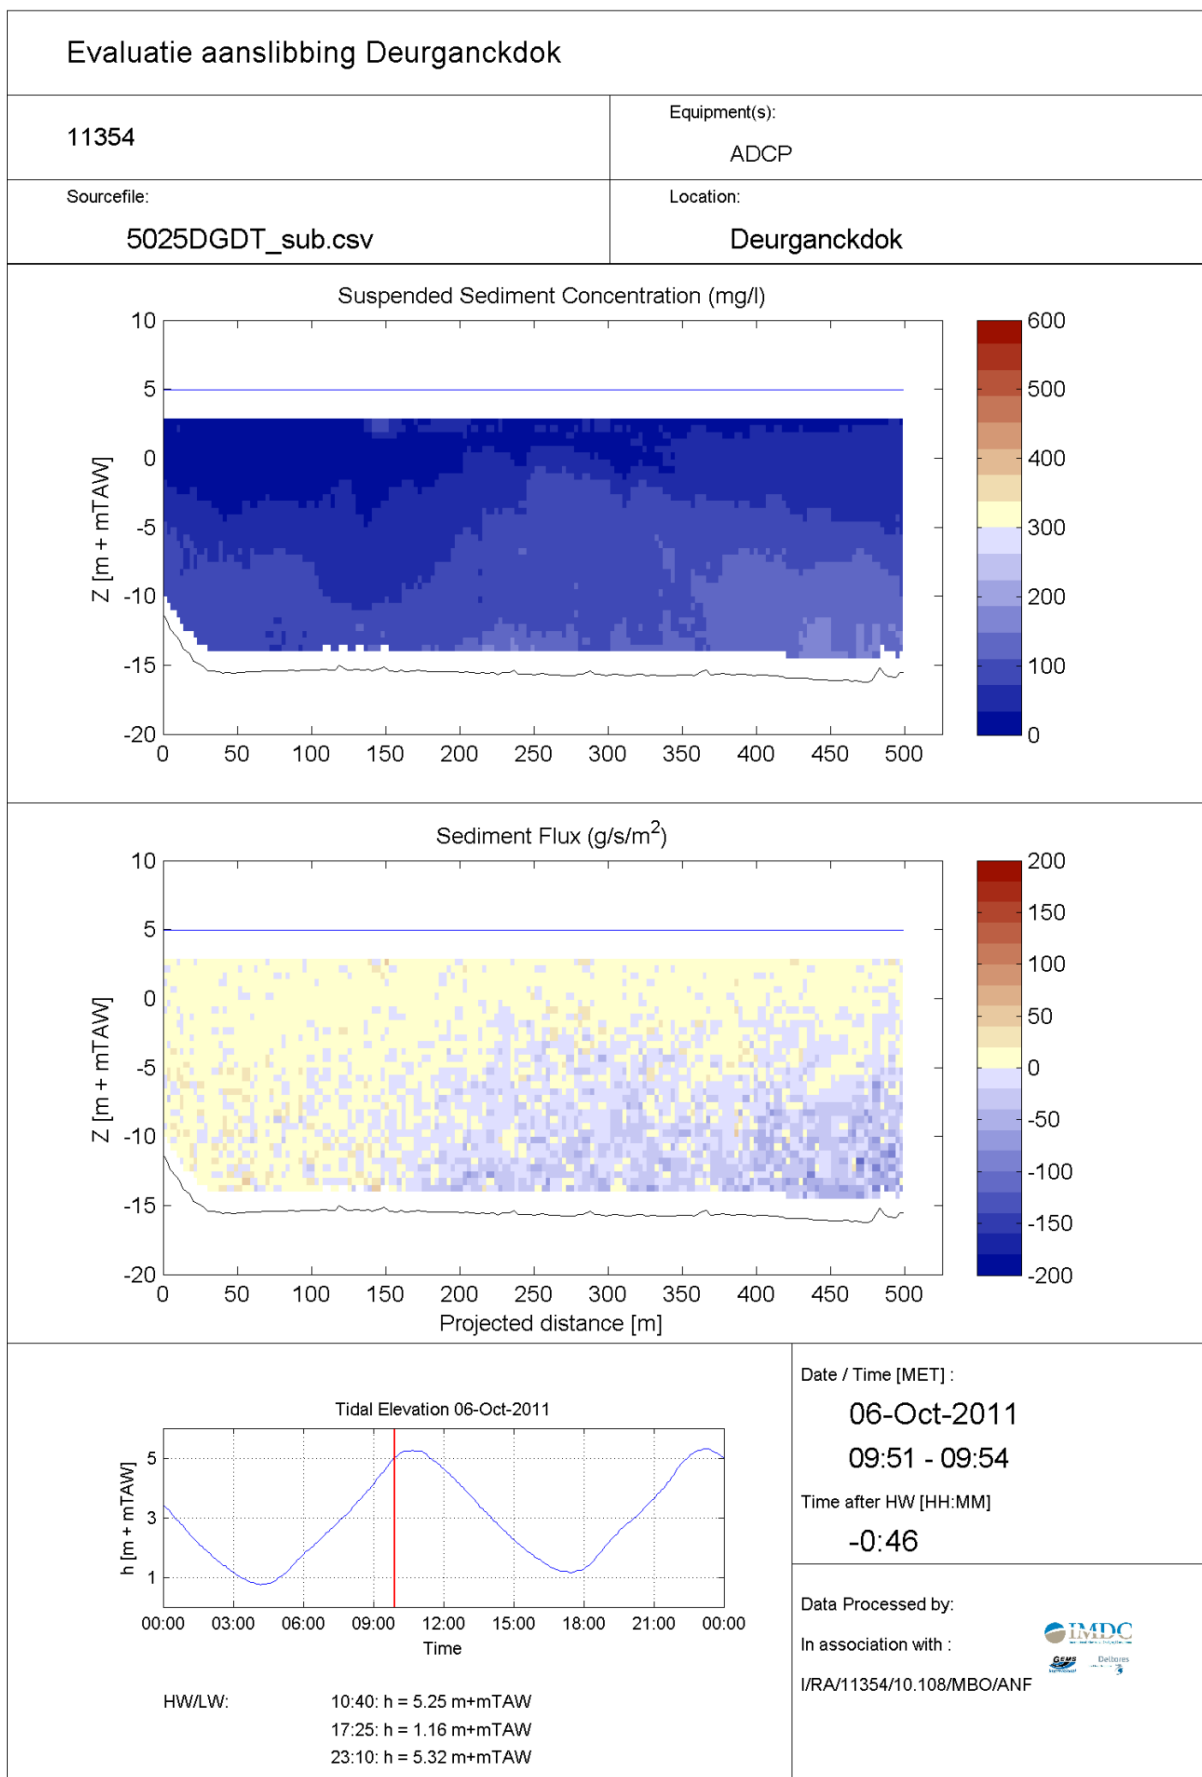


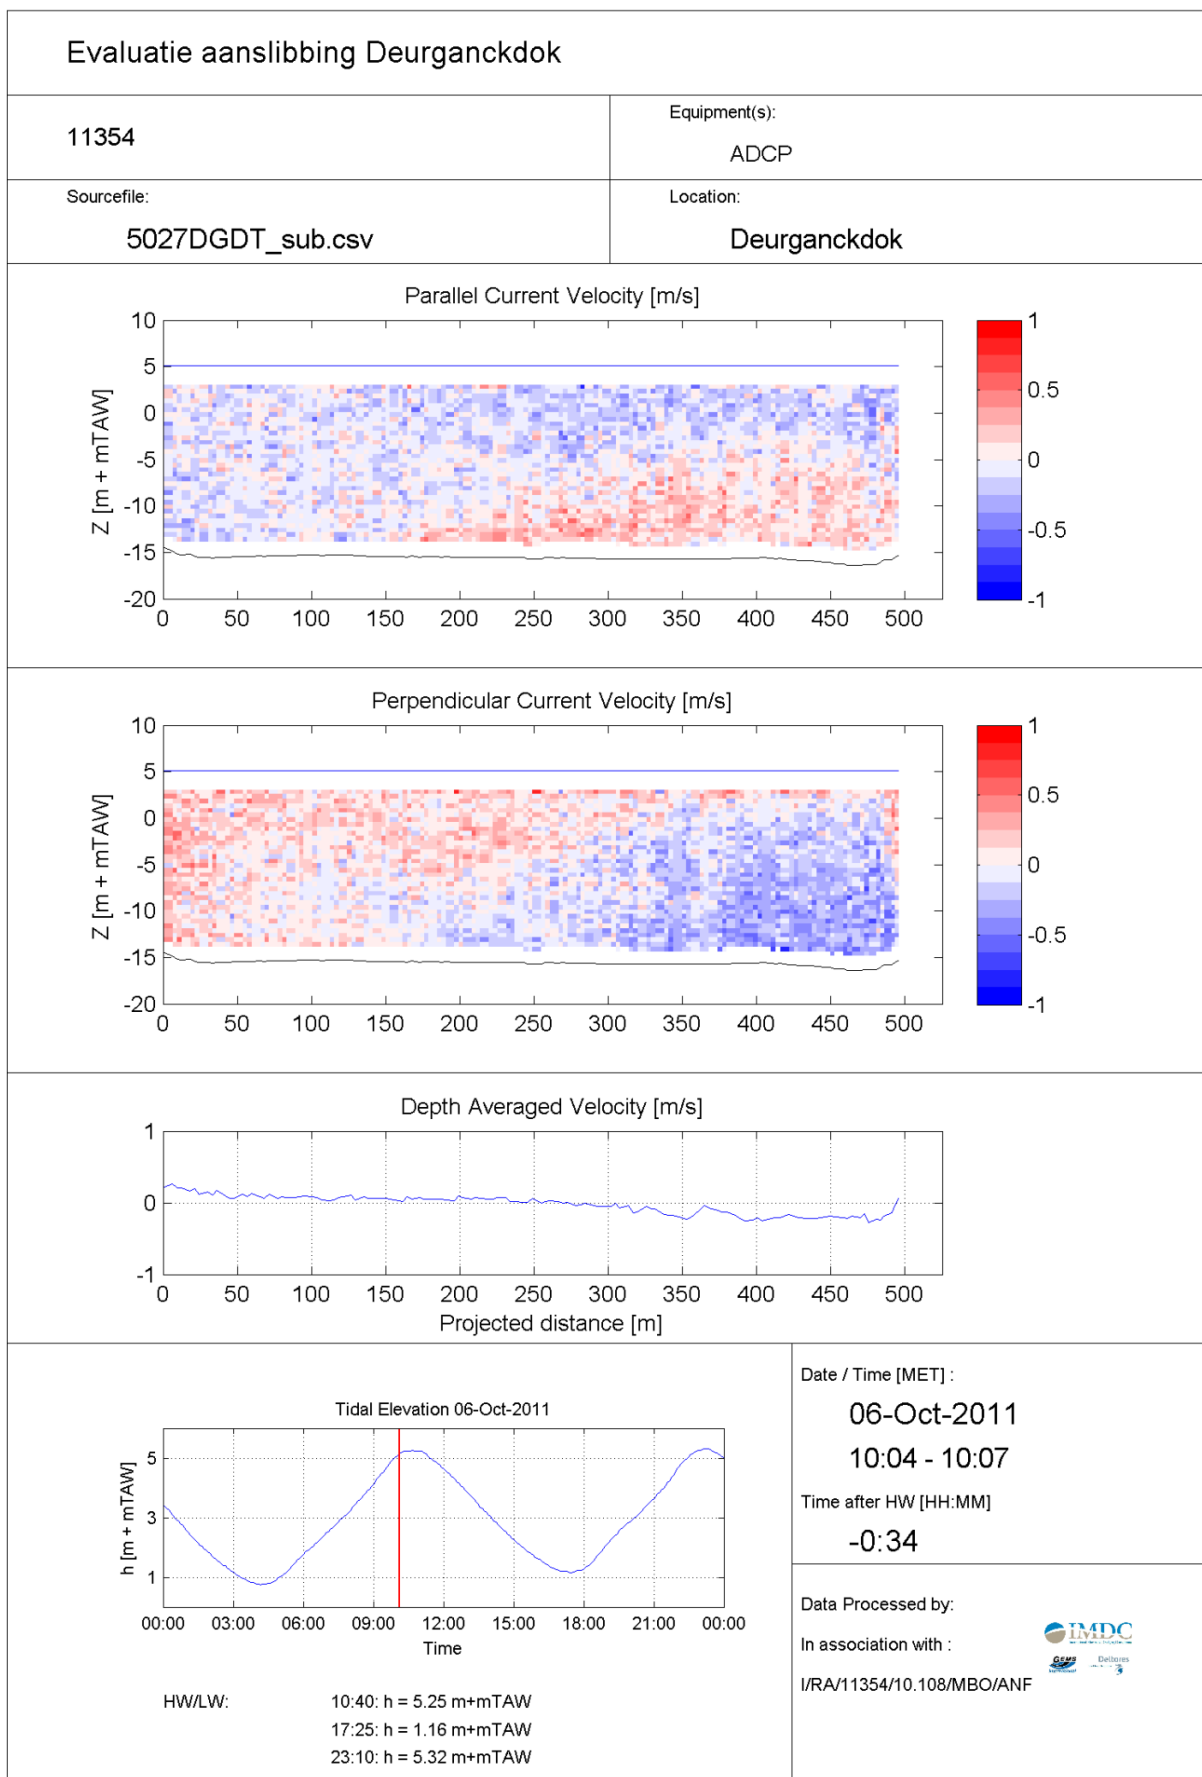


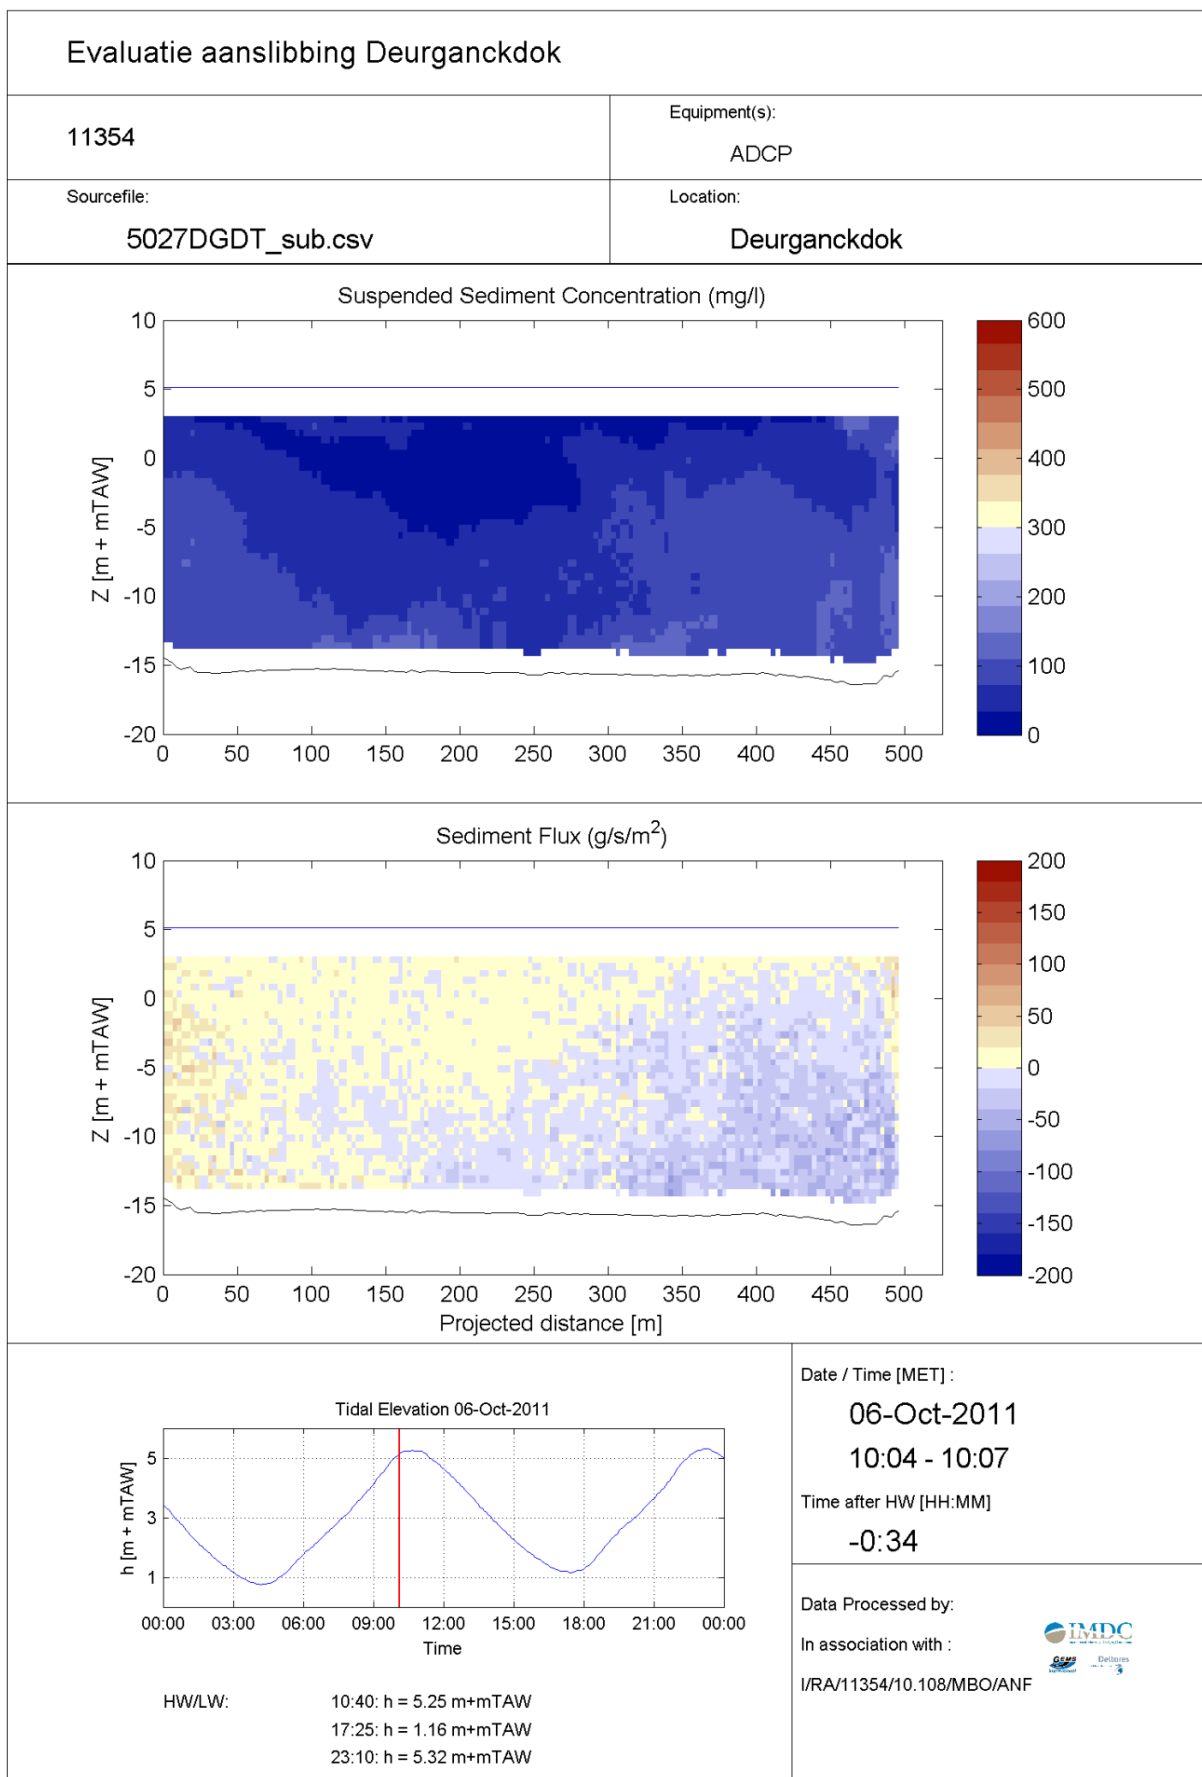


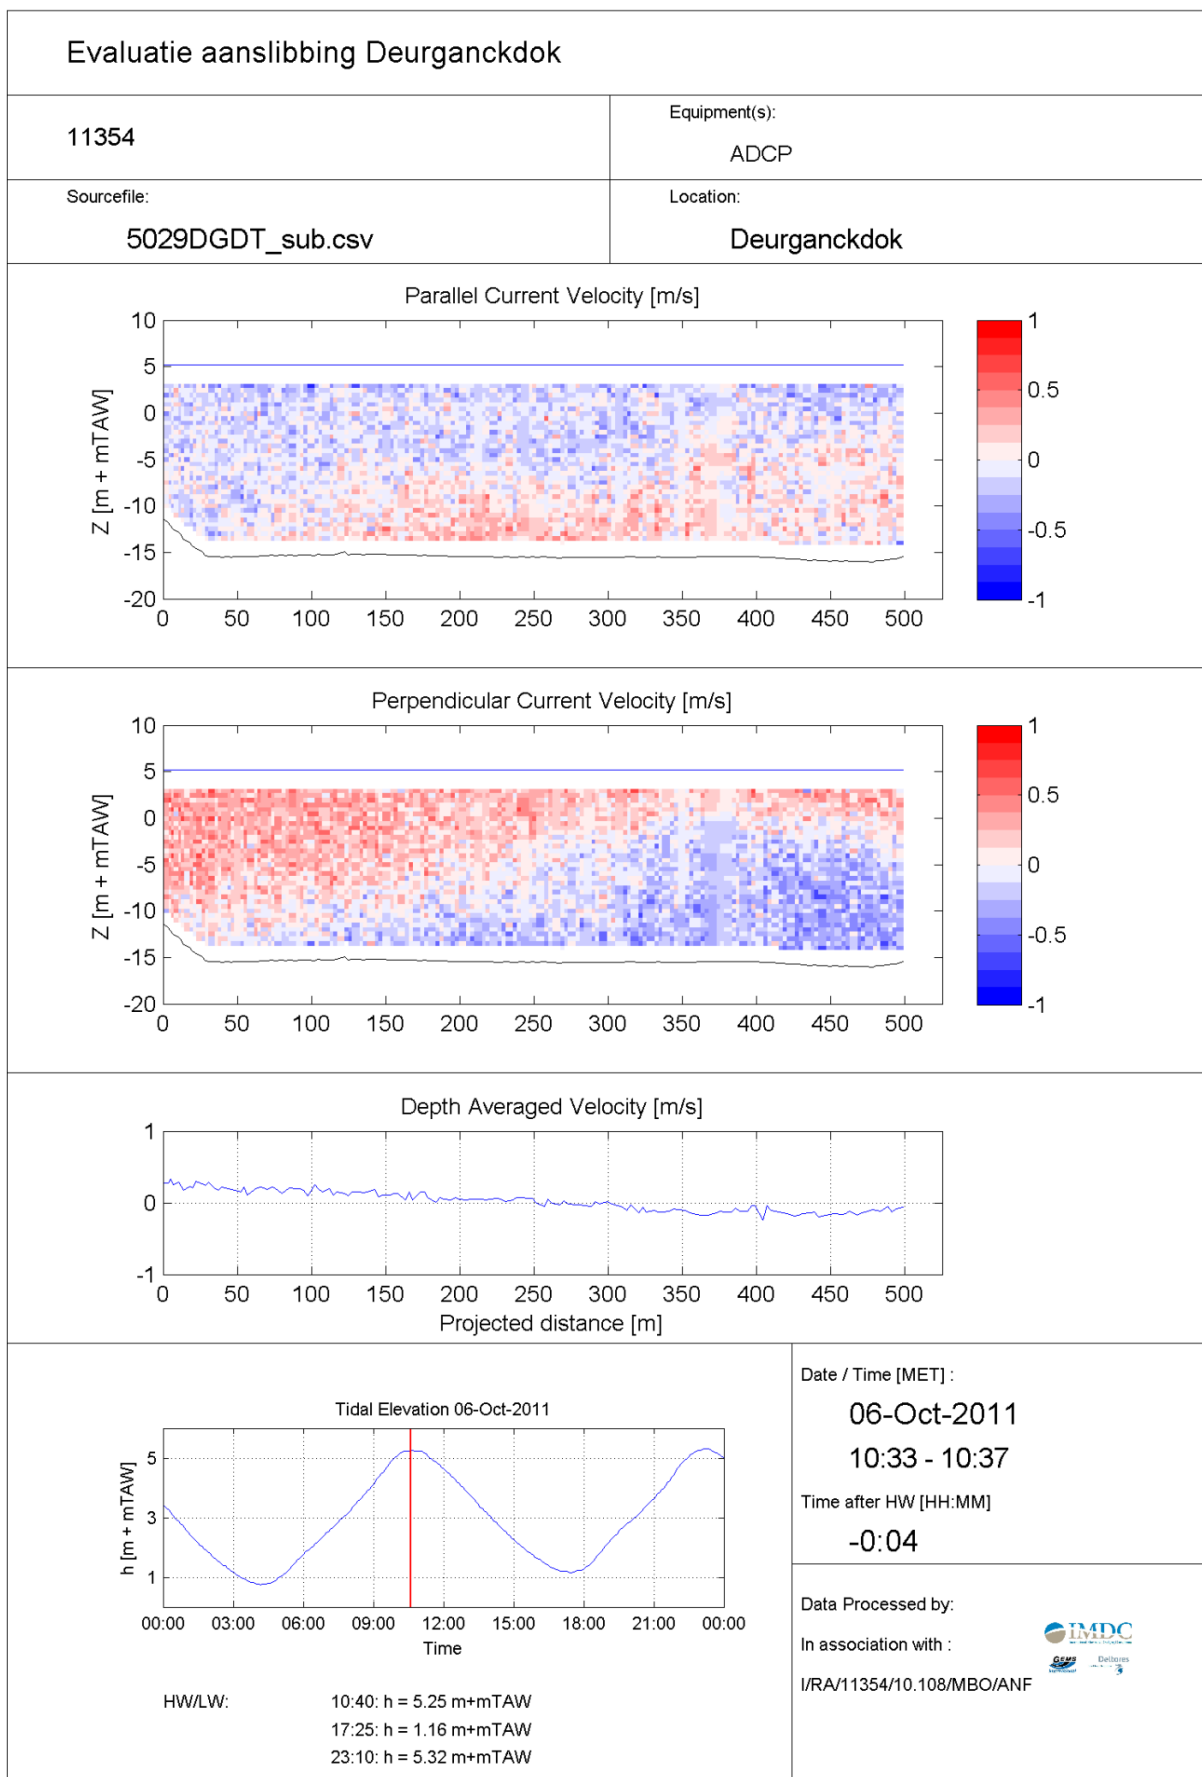

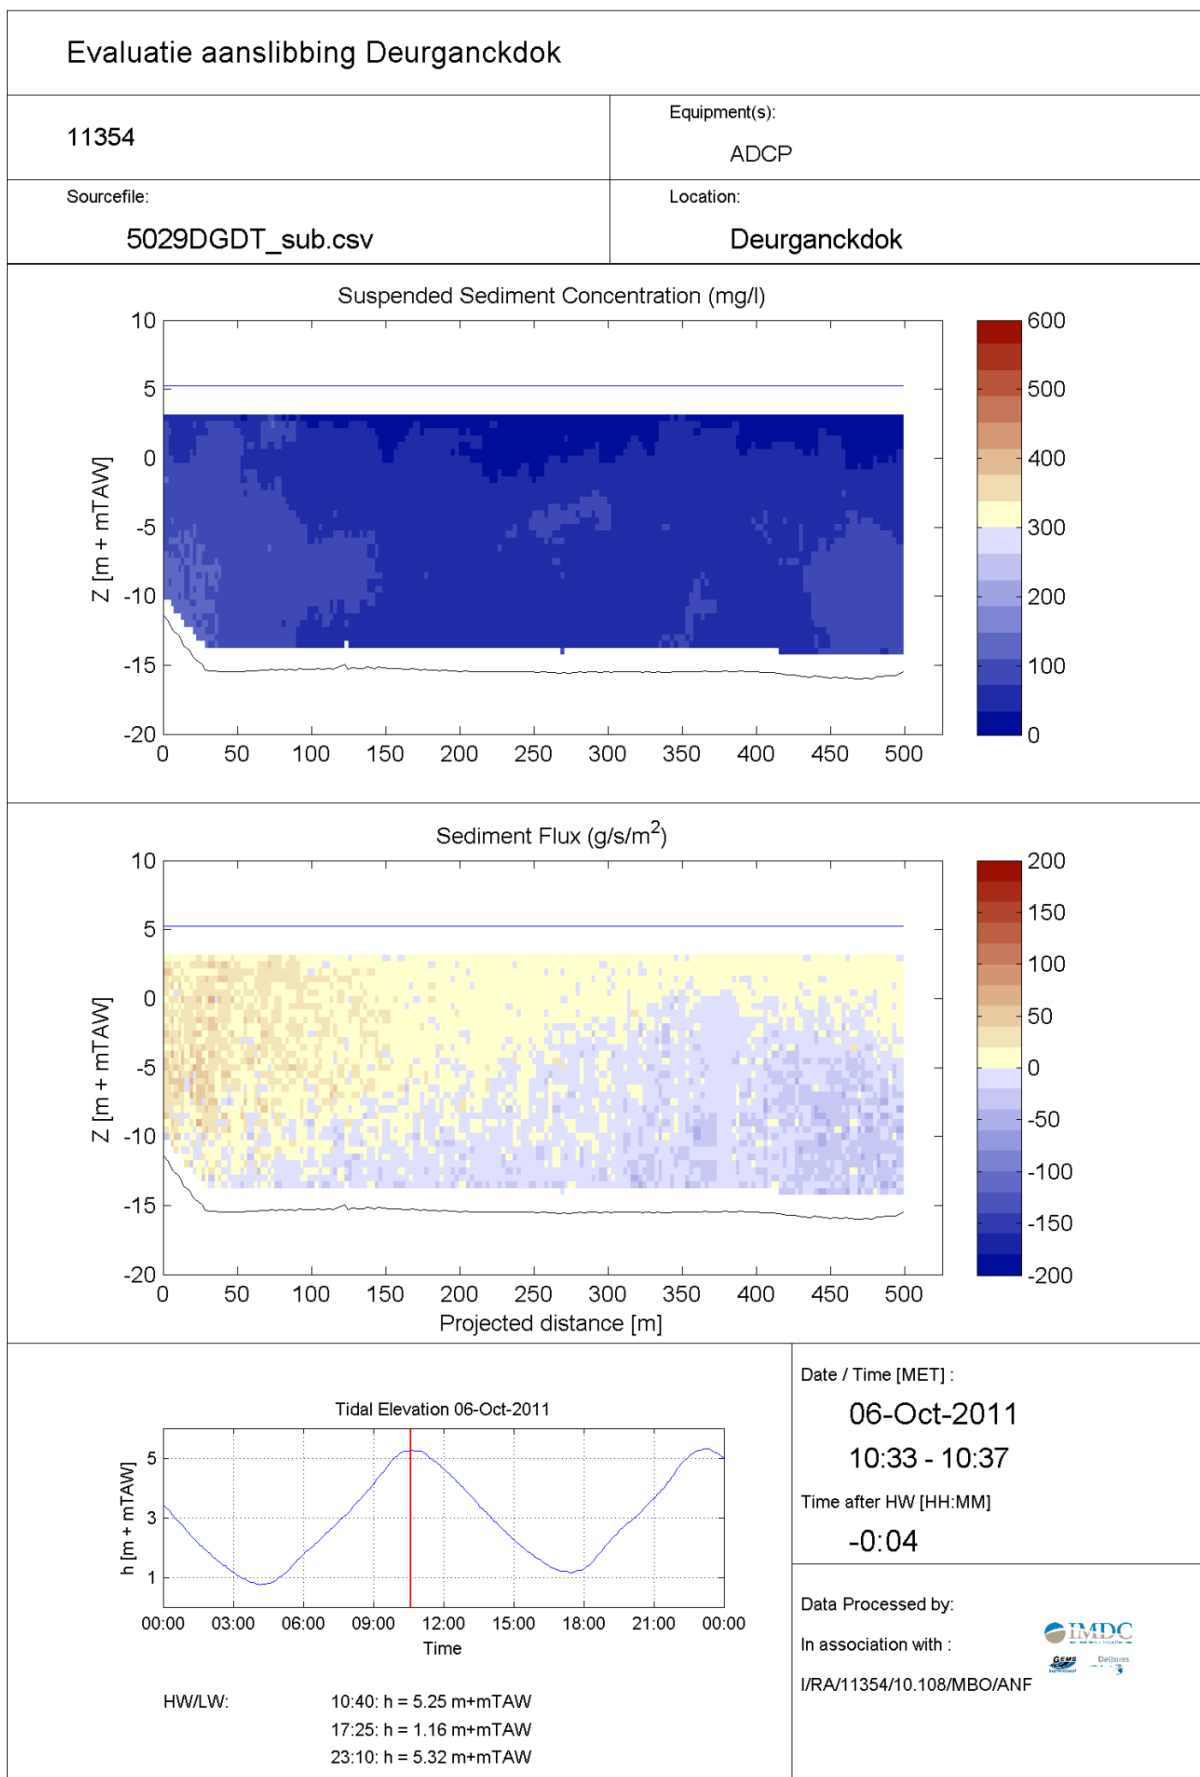

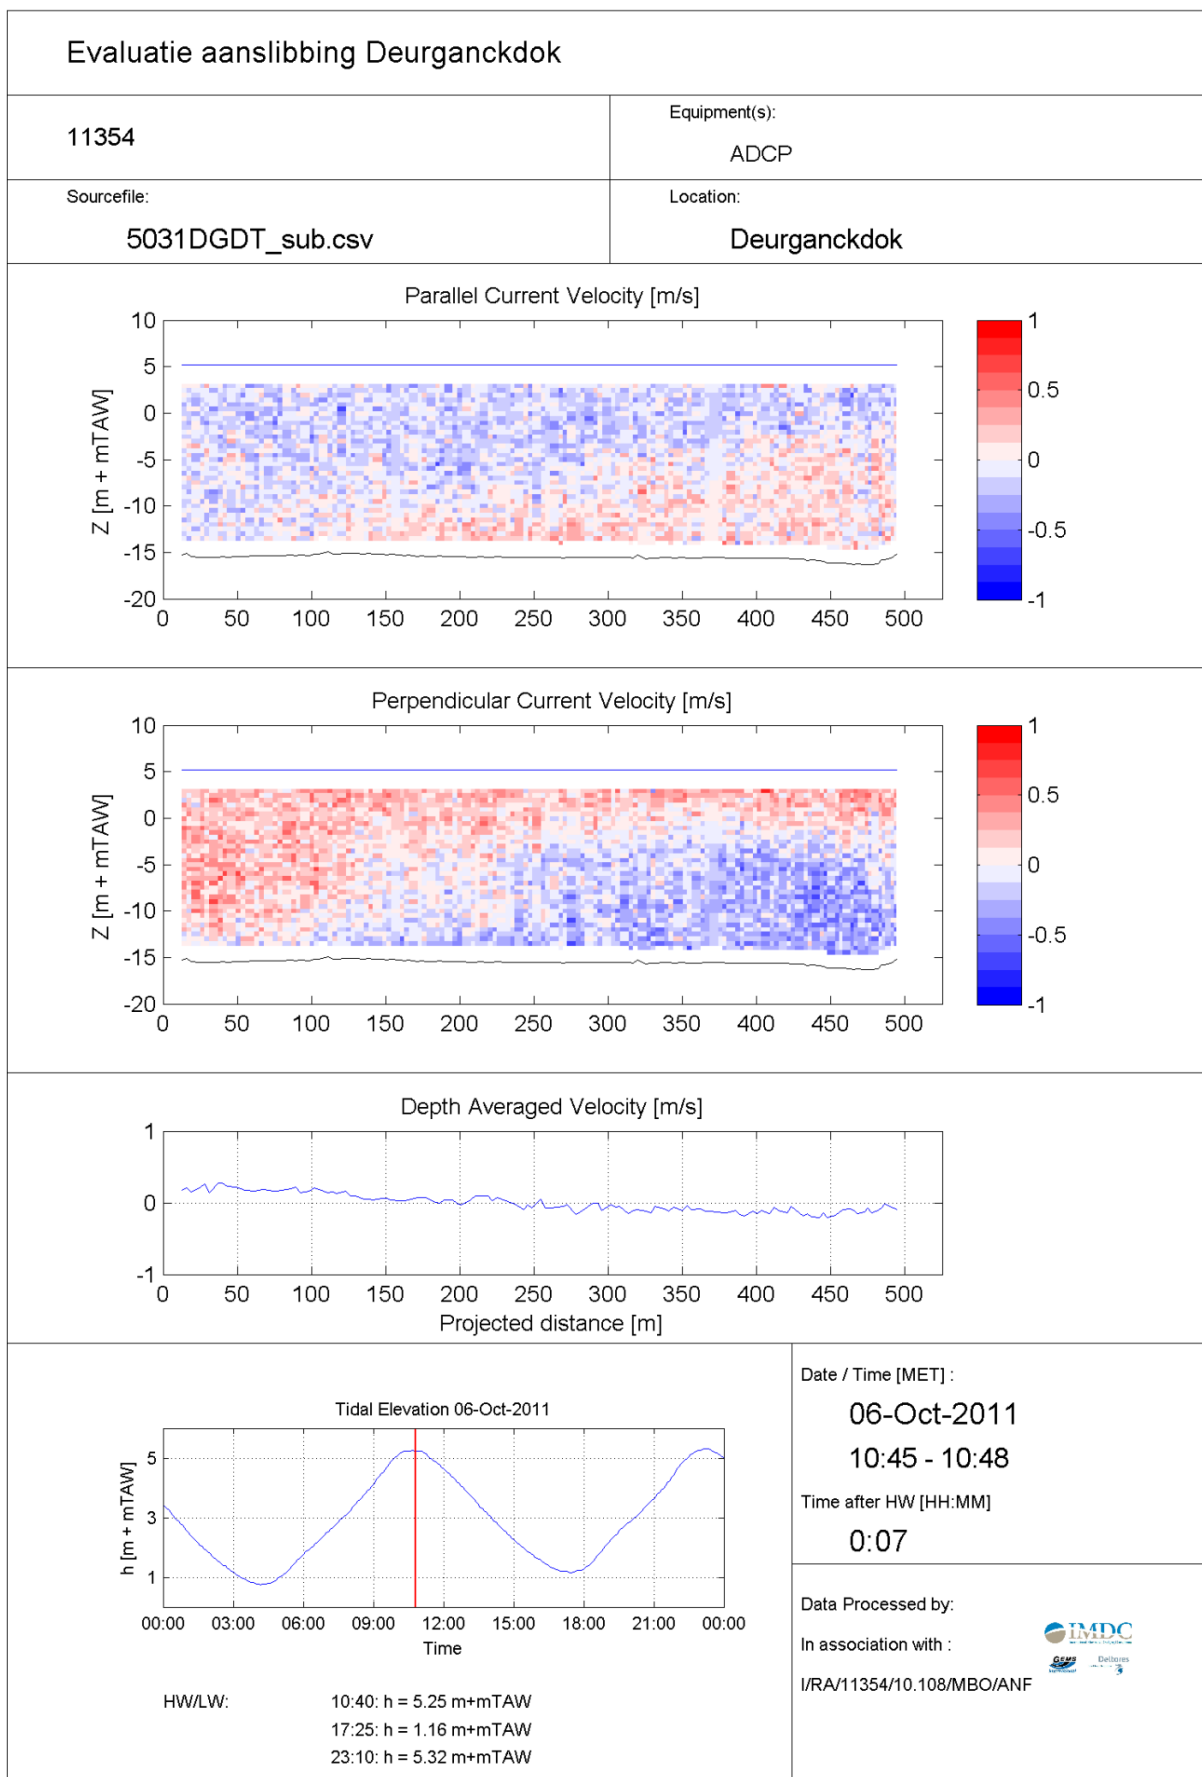

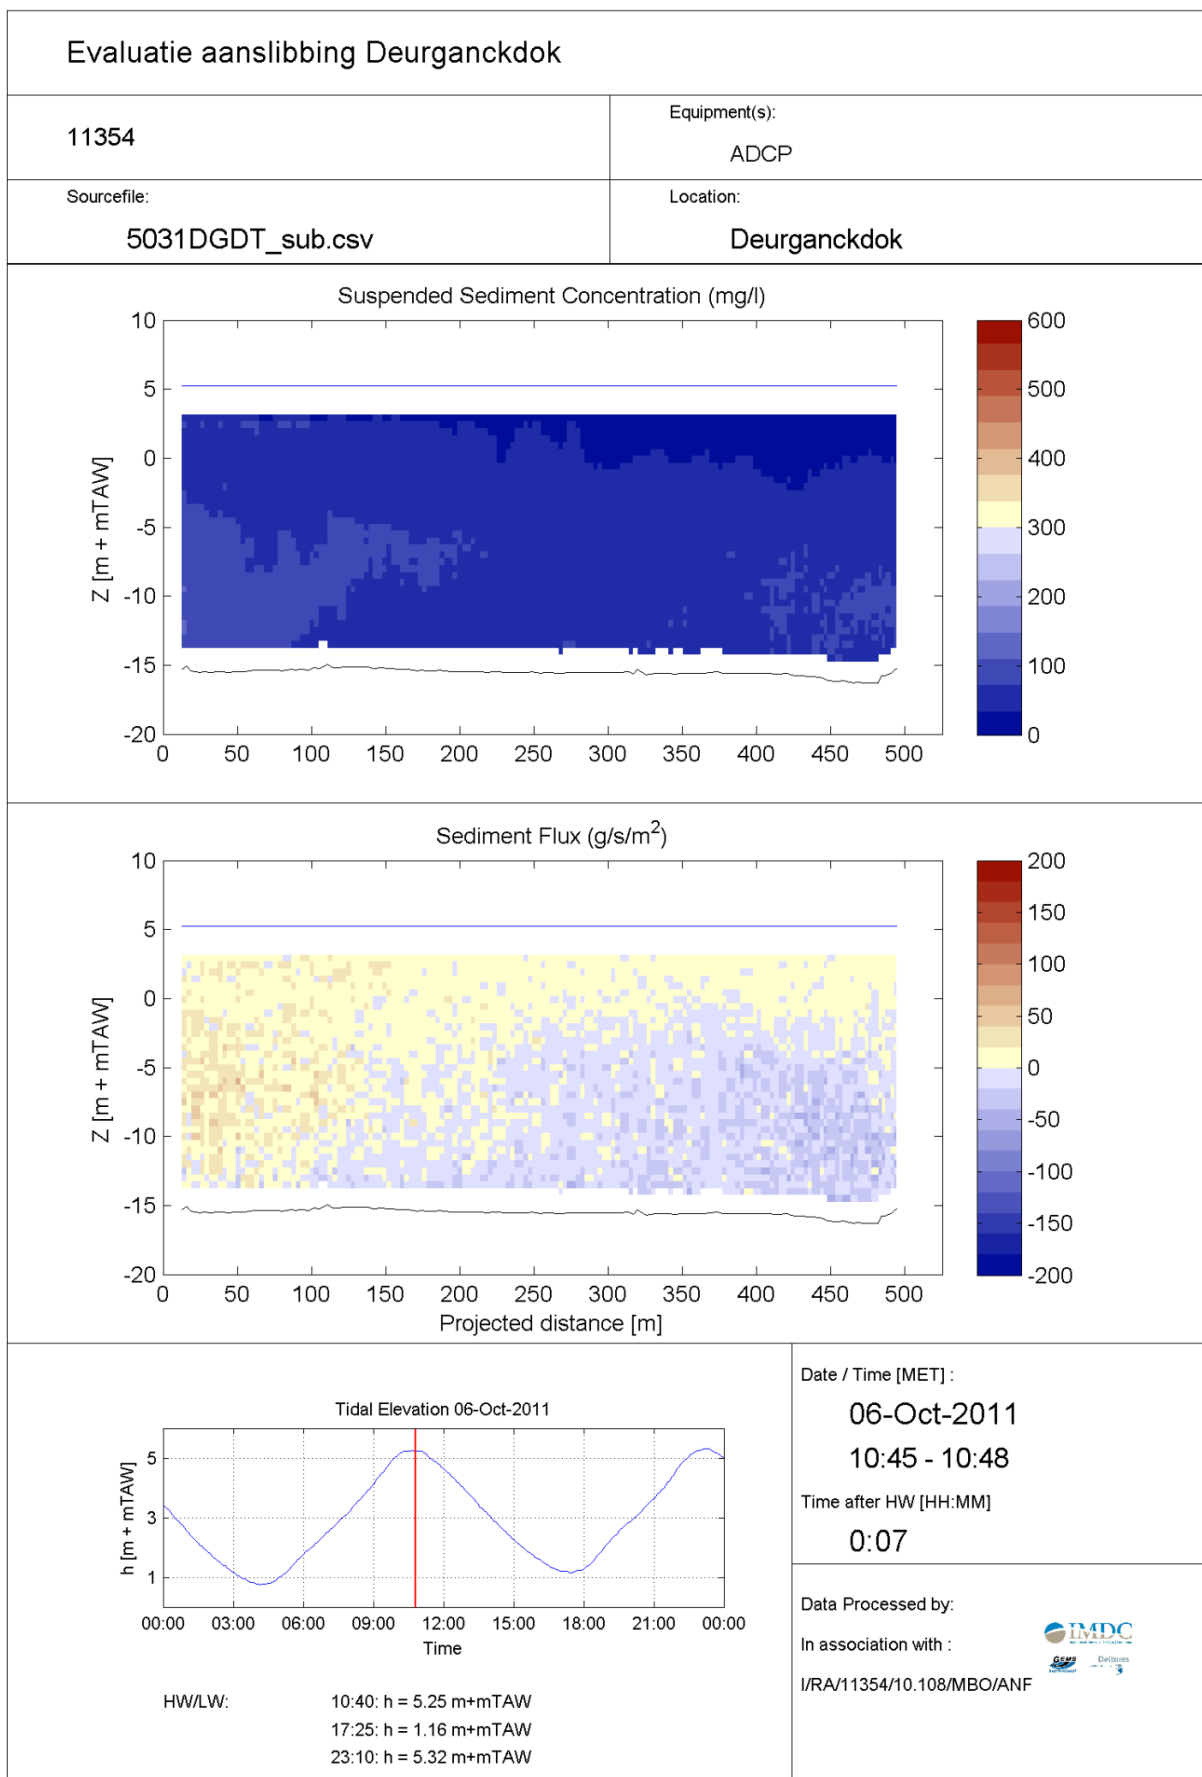

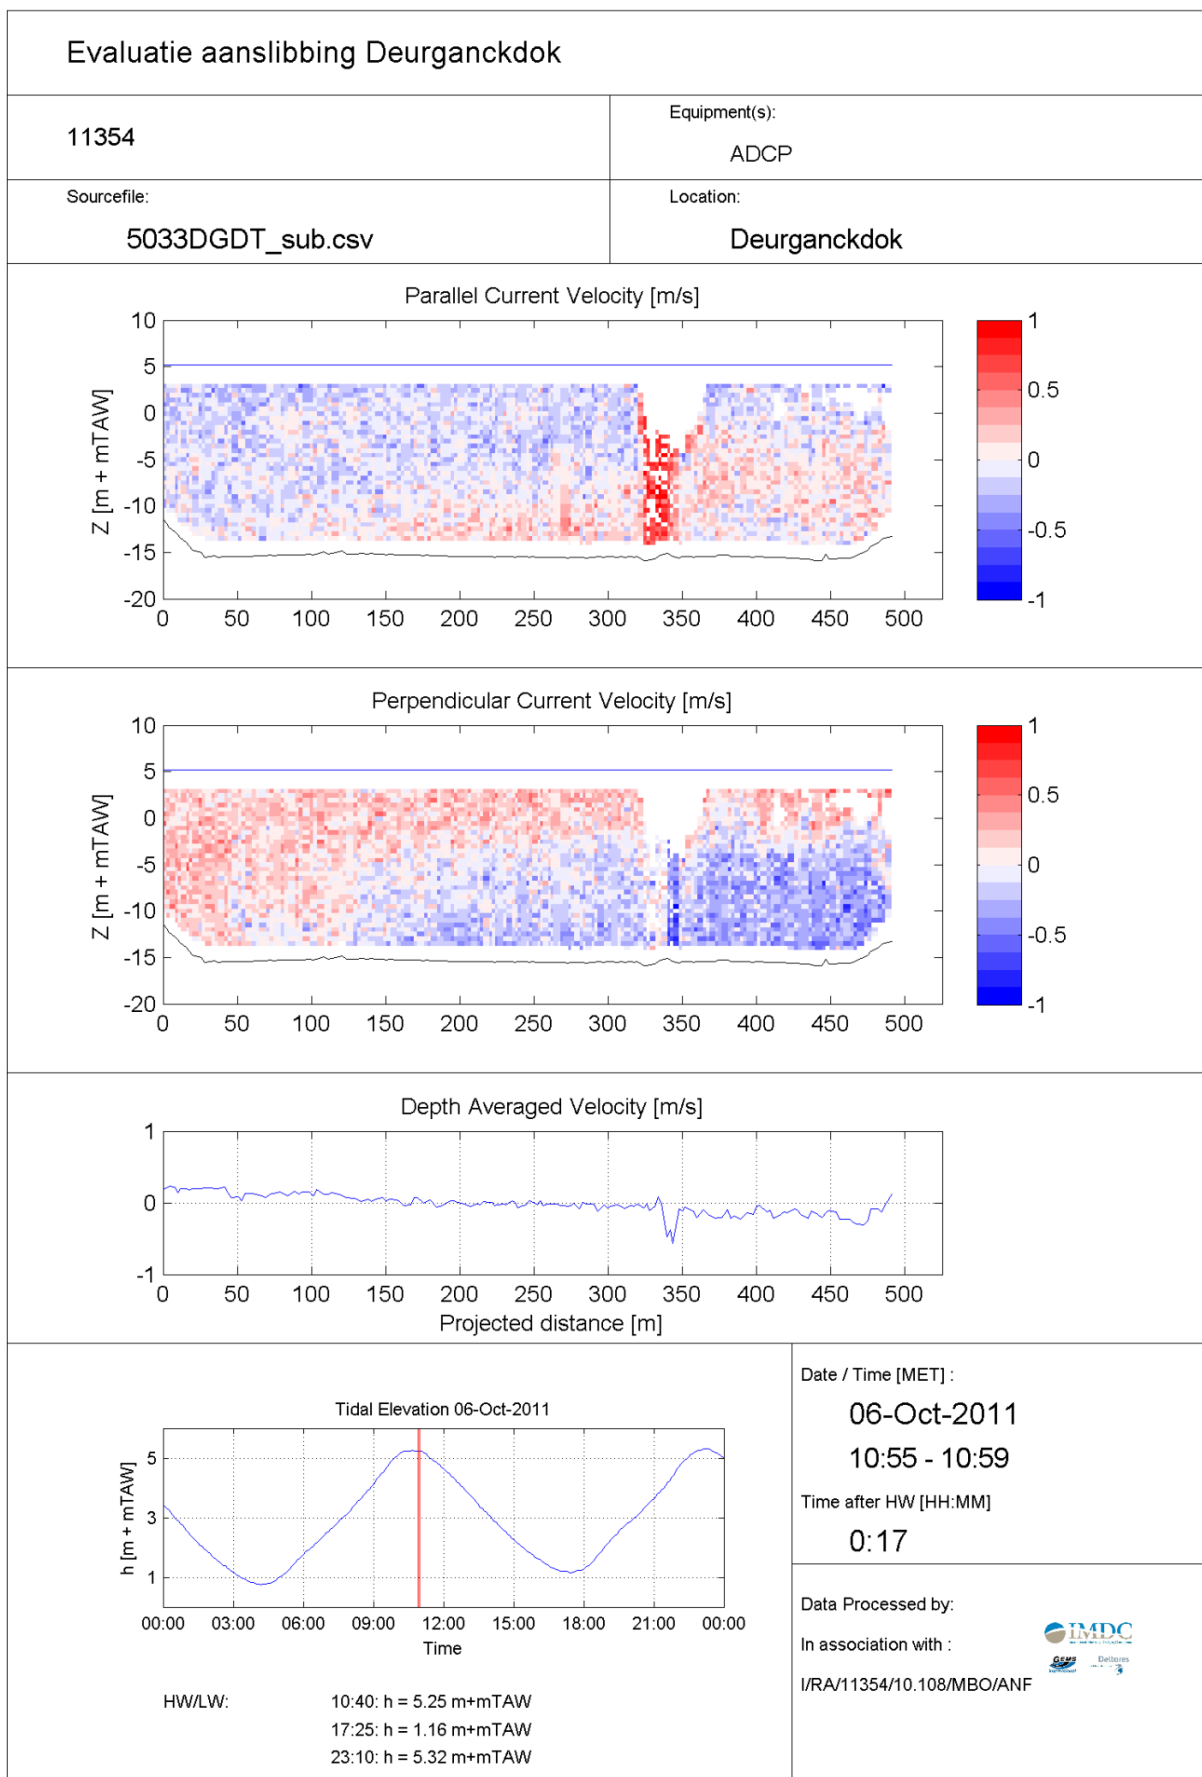

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5033DGDT_sub.csv

Location:

Deurganckdok

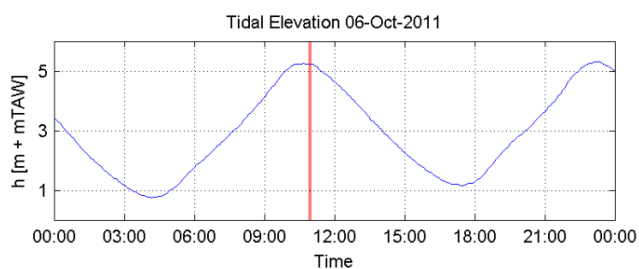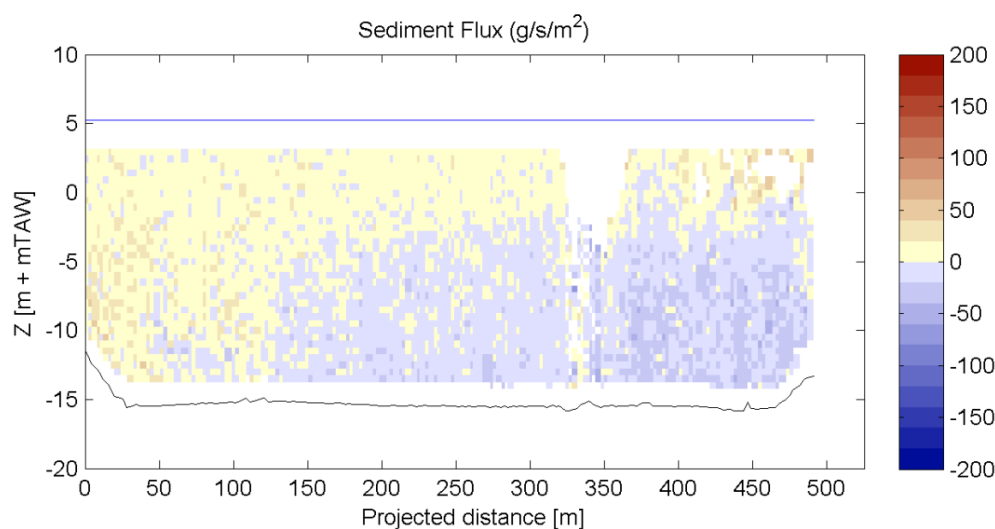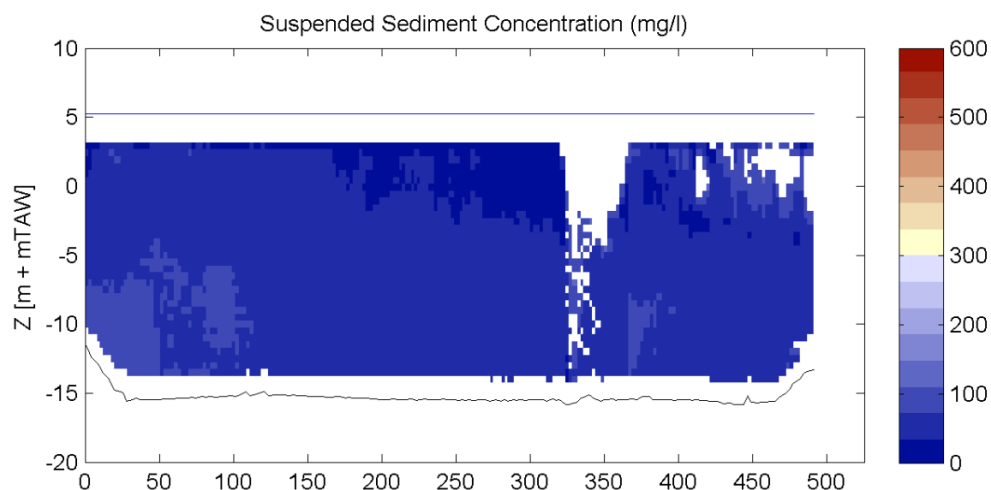

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

10:55 - 10:59

Time after HW [HH:MM]


0:17


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



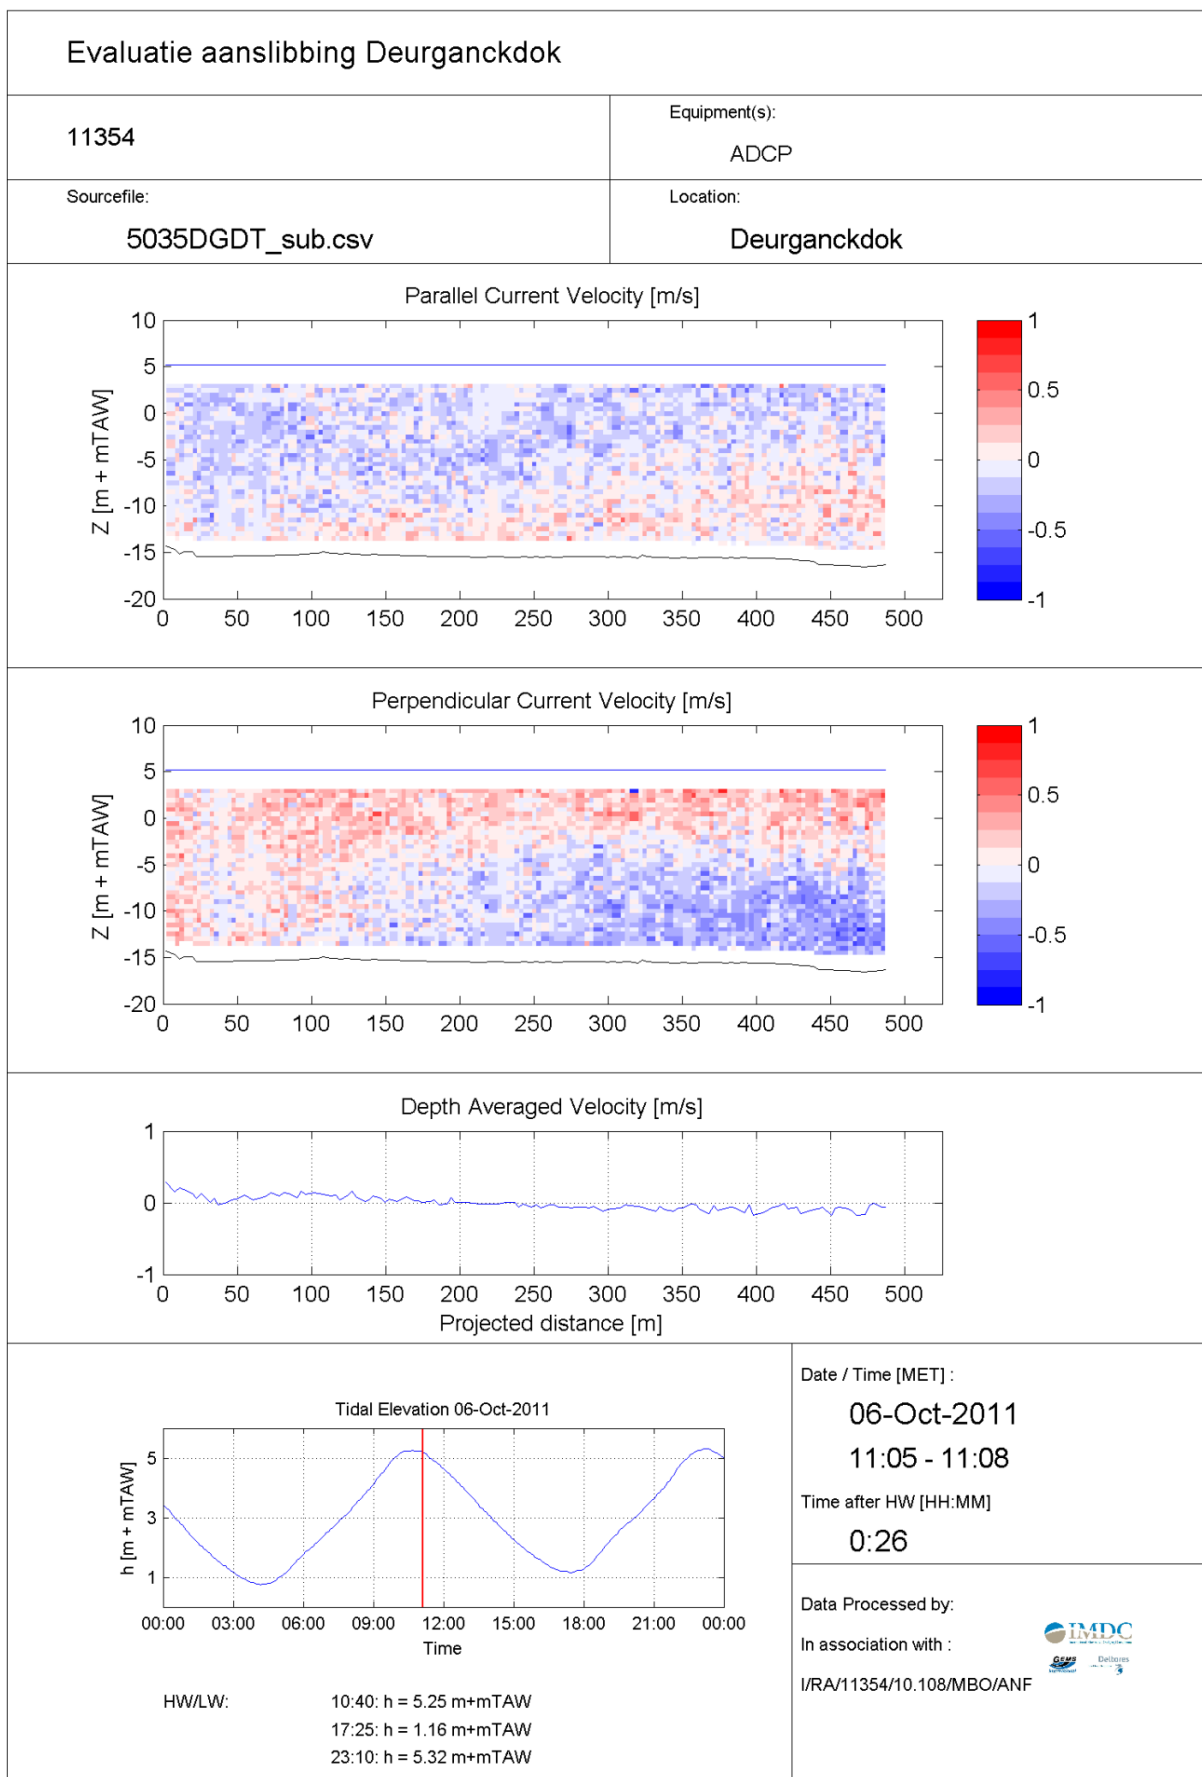

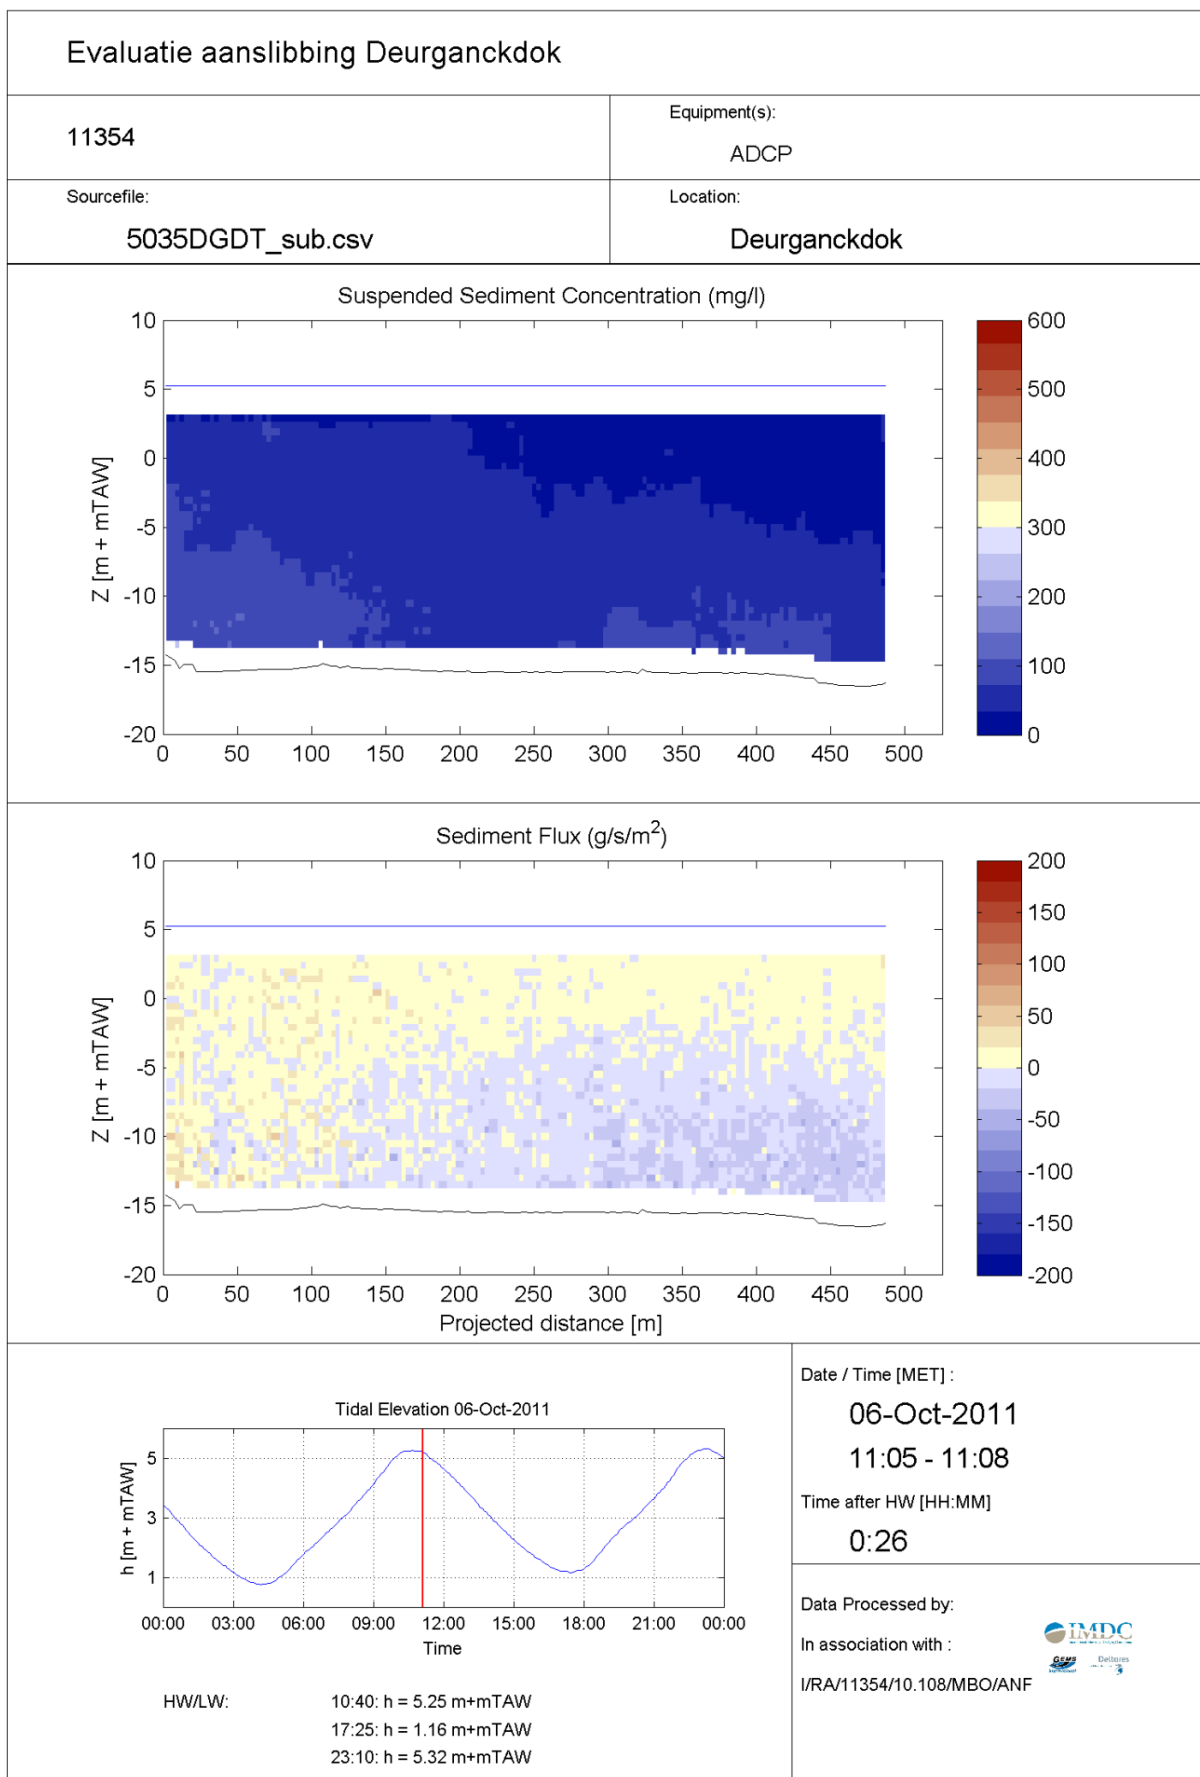

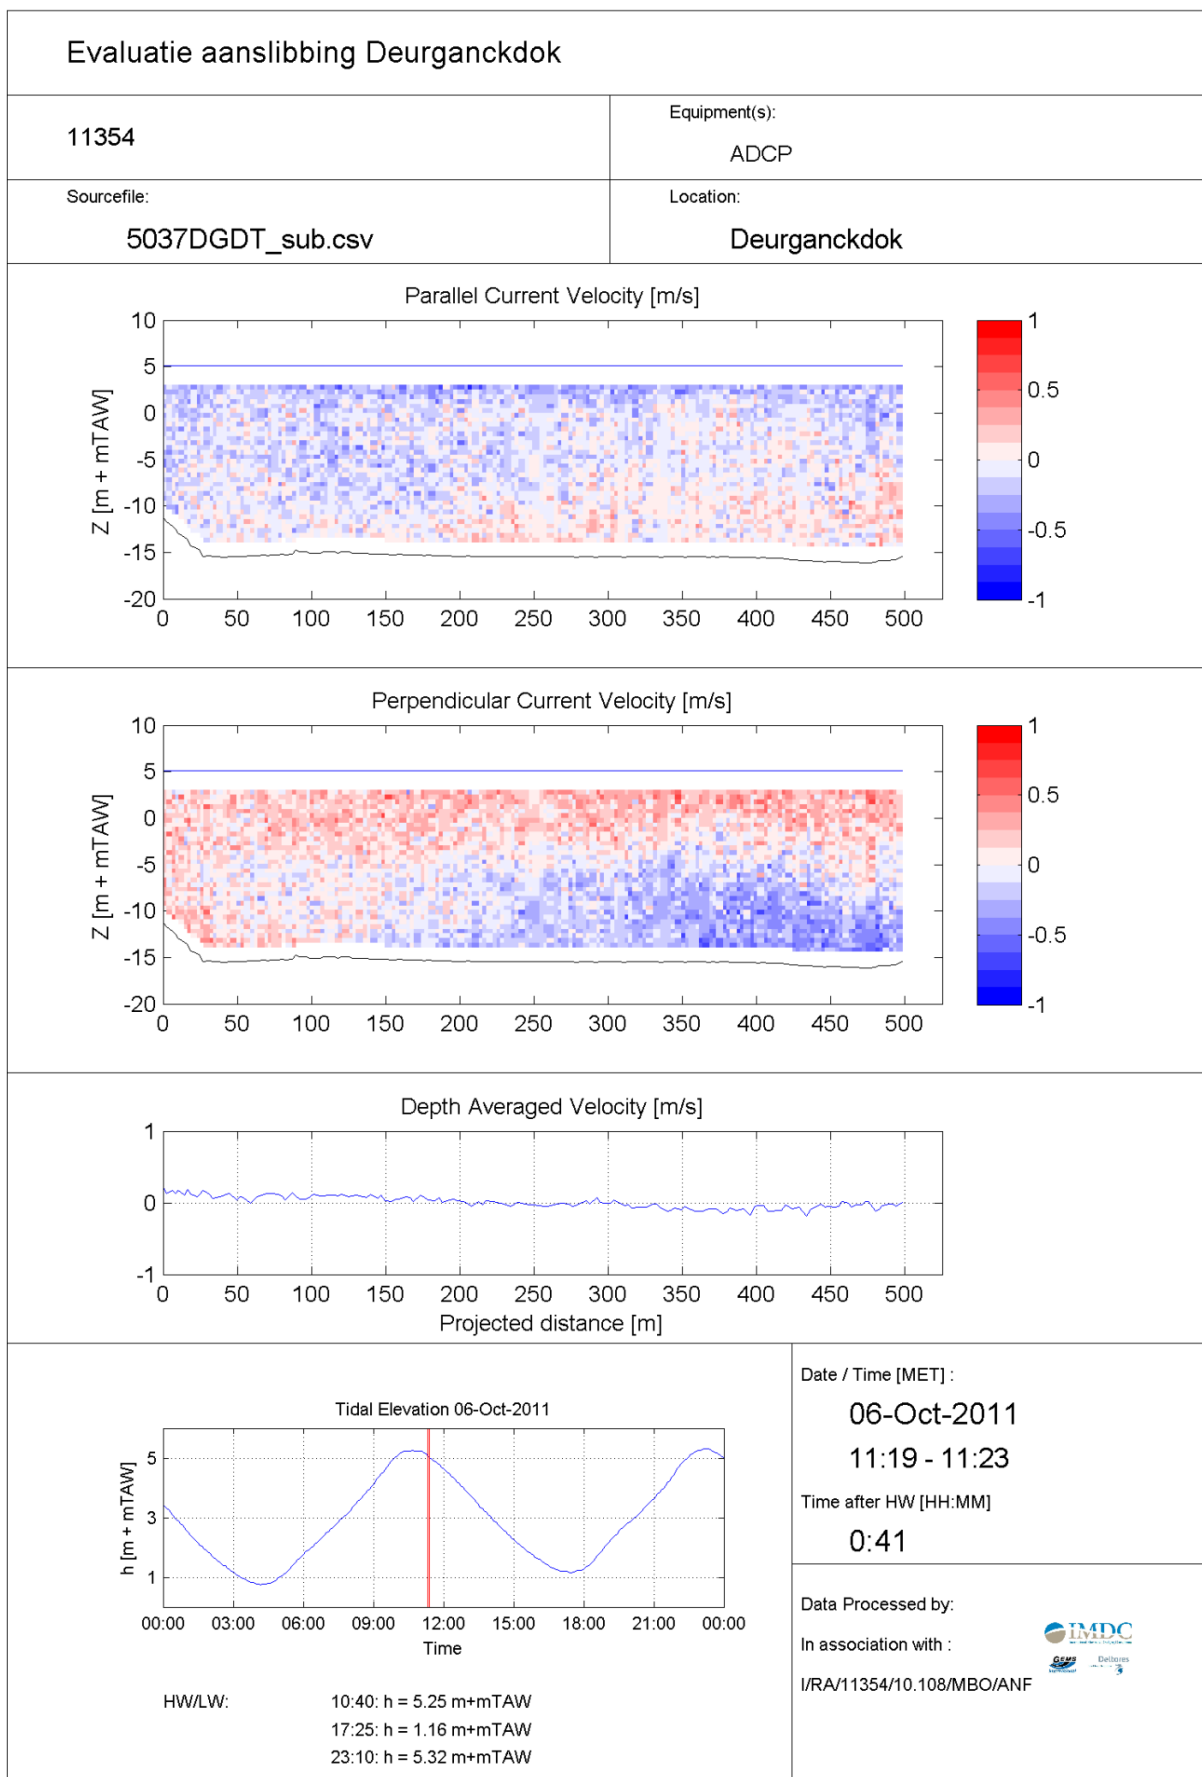

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5037DGMT_sub.csv

Location:

Deurganckdok

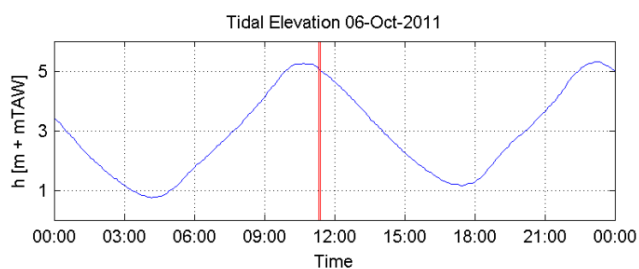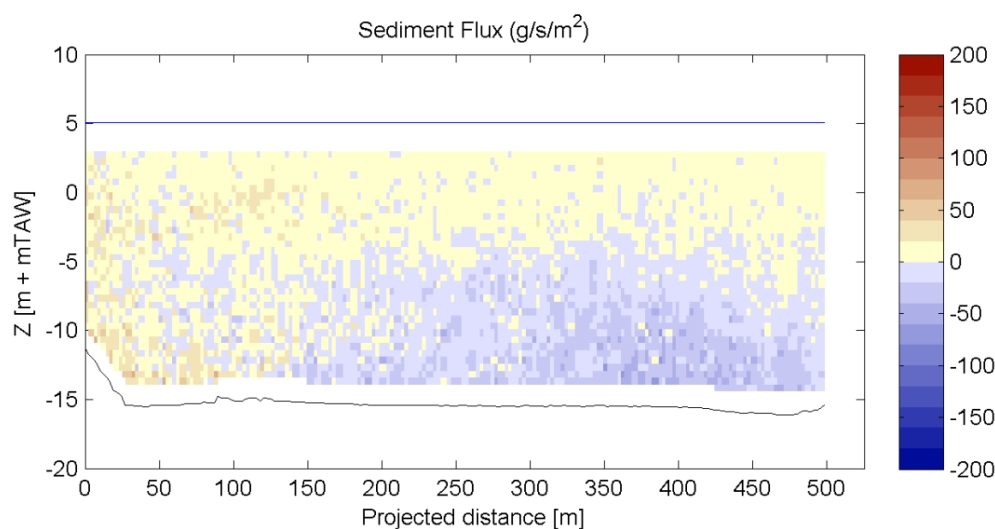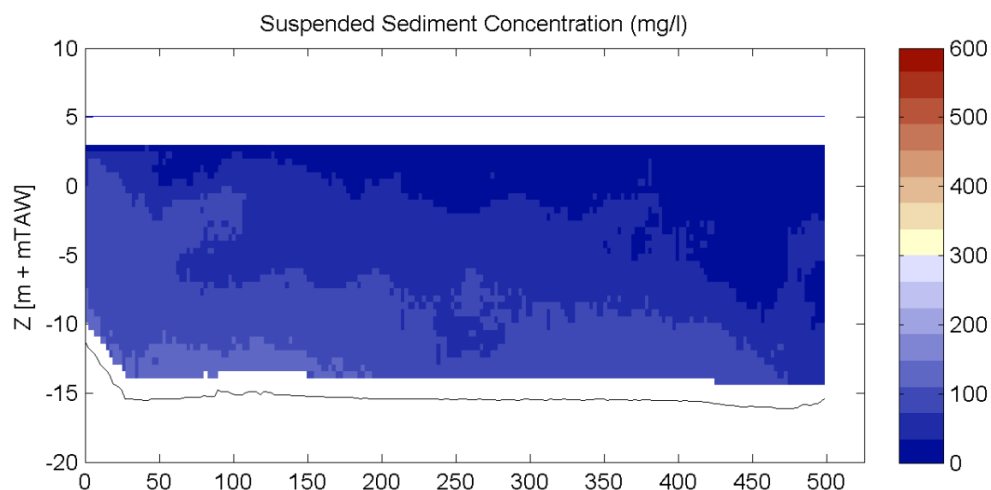

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

11:19 - 11:23

Time after HW [HH:MM]


0:41


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



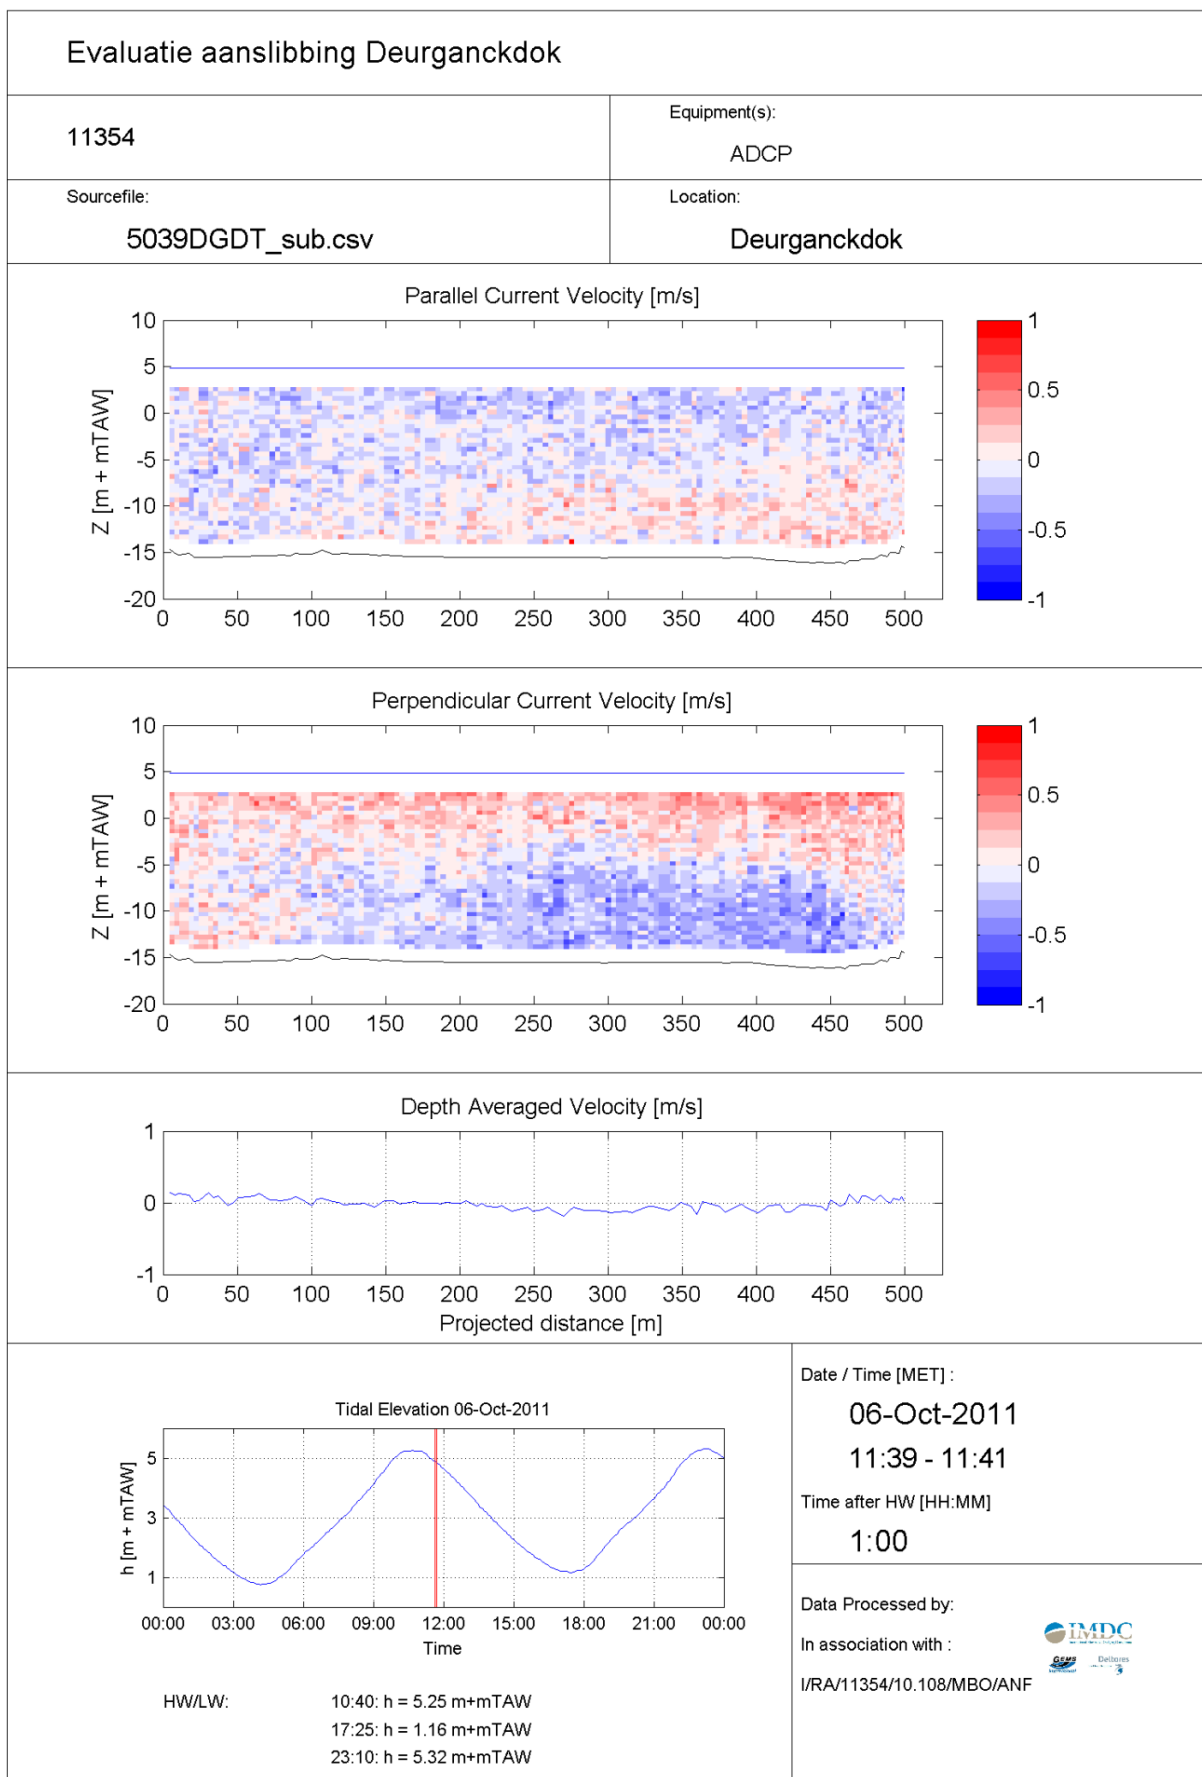

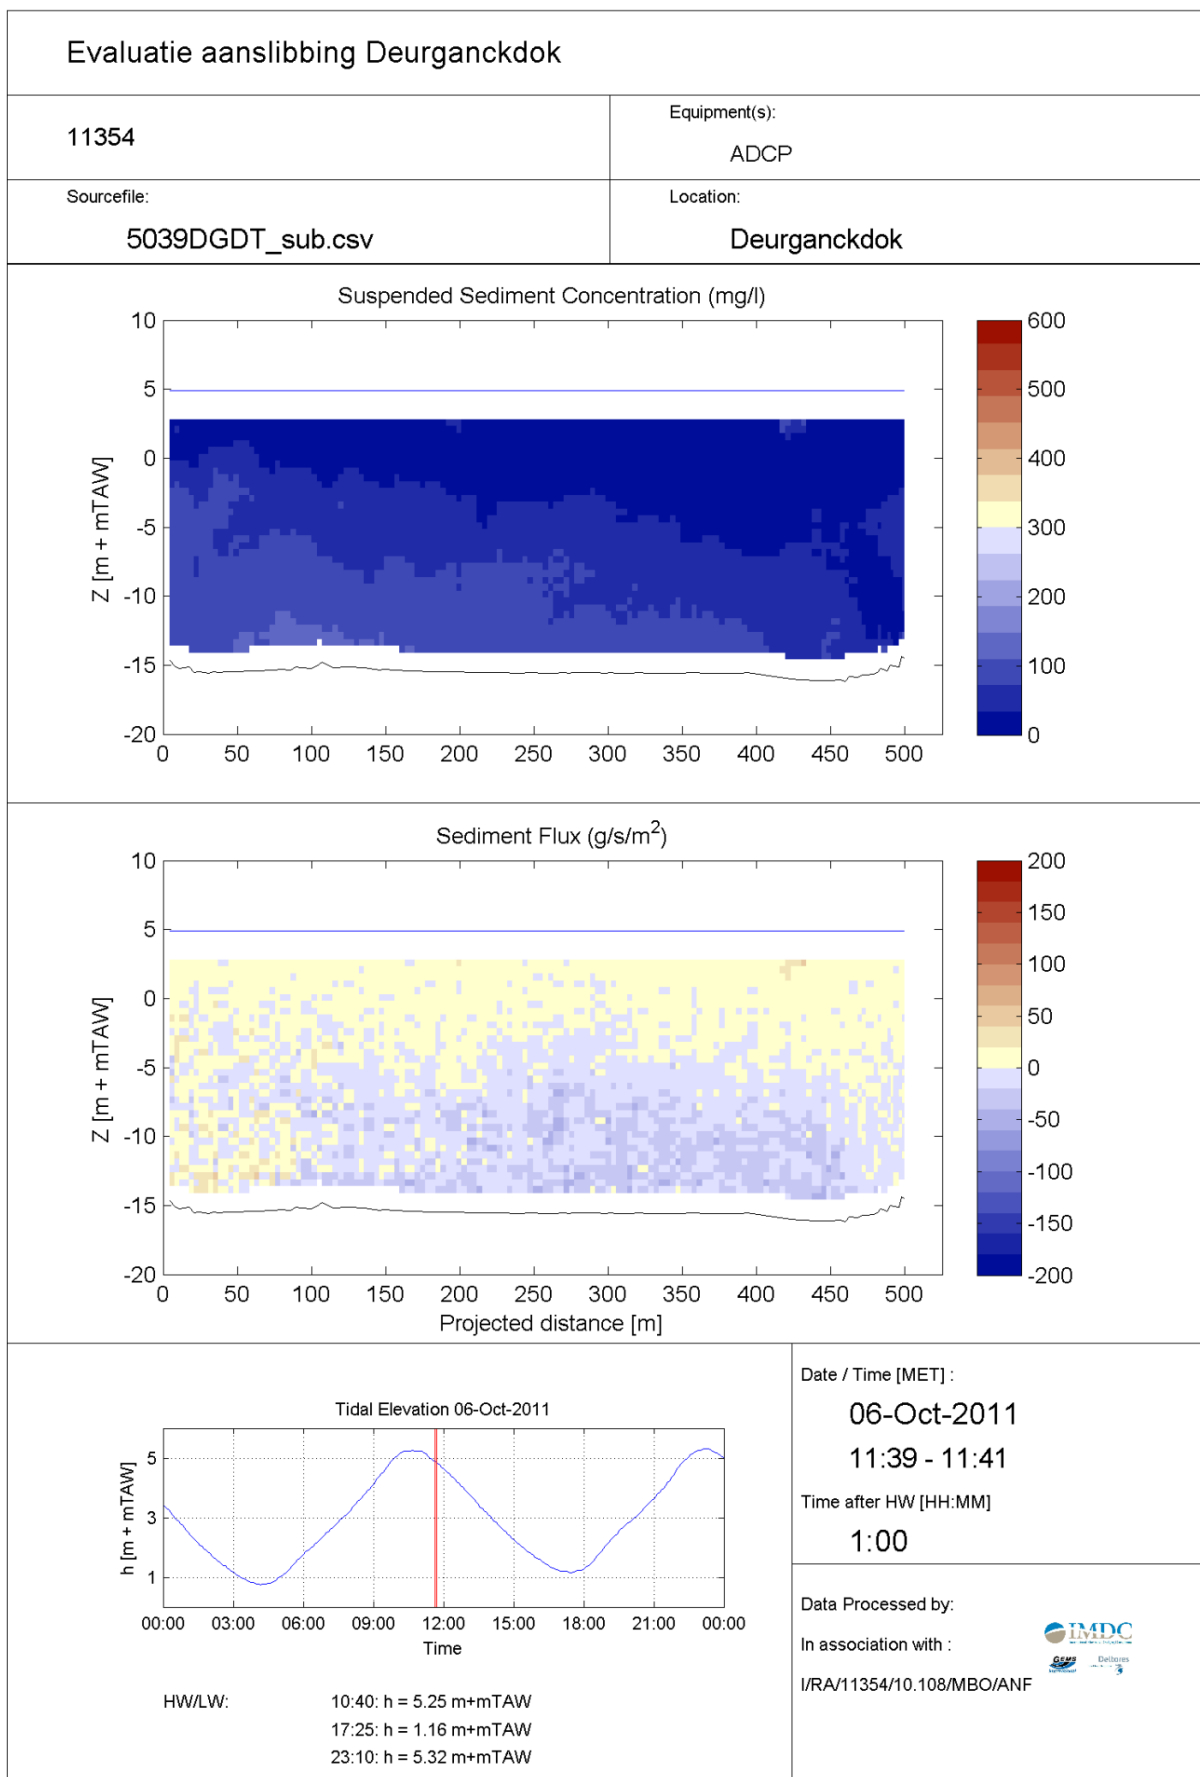

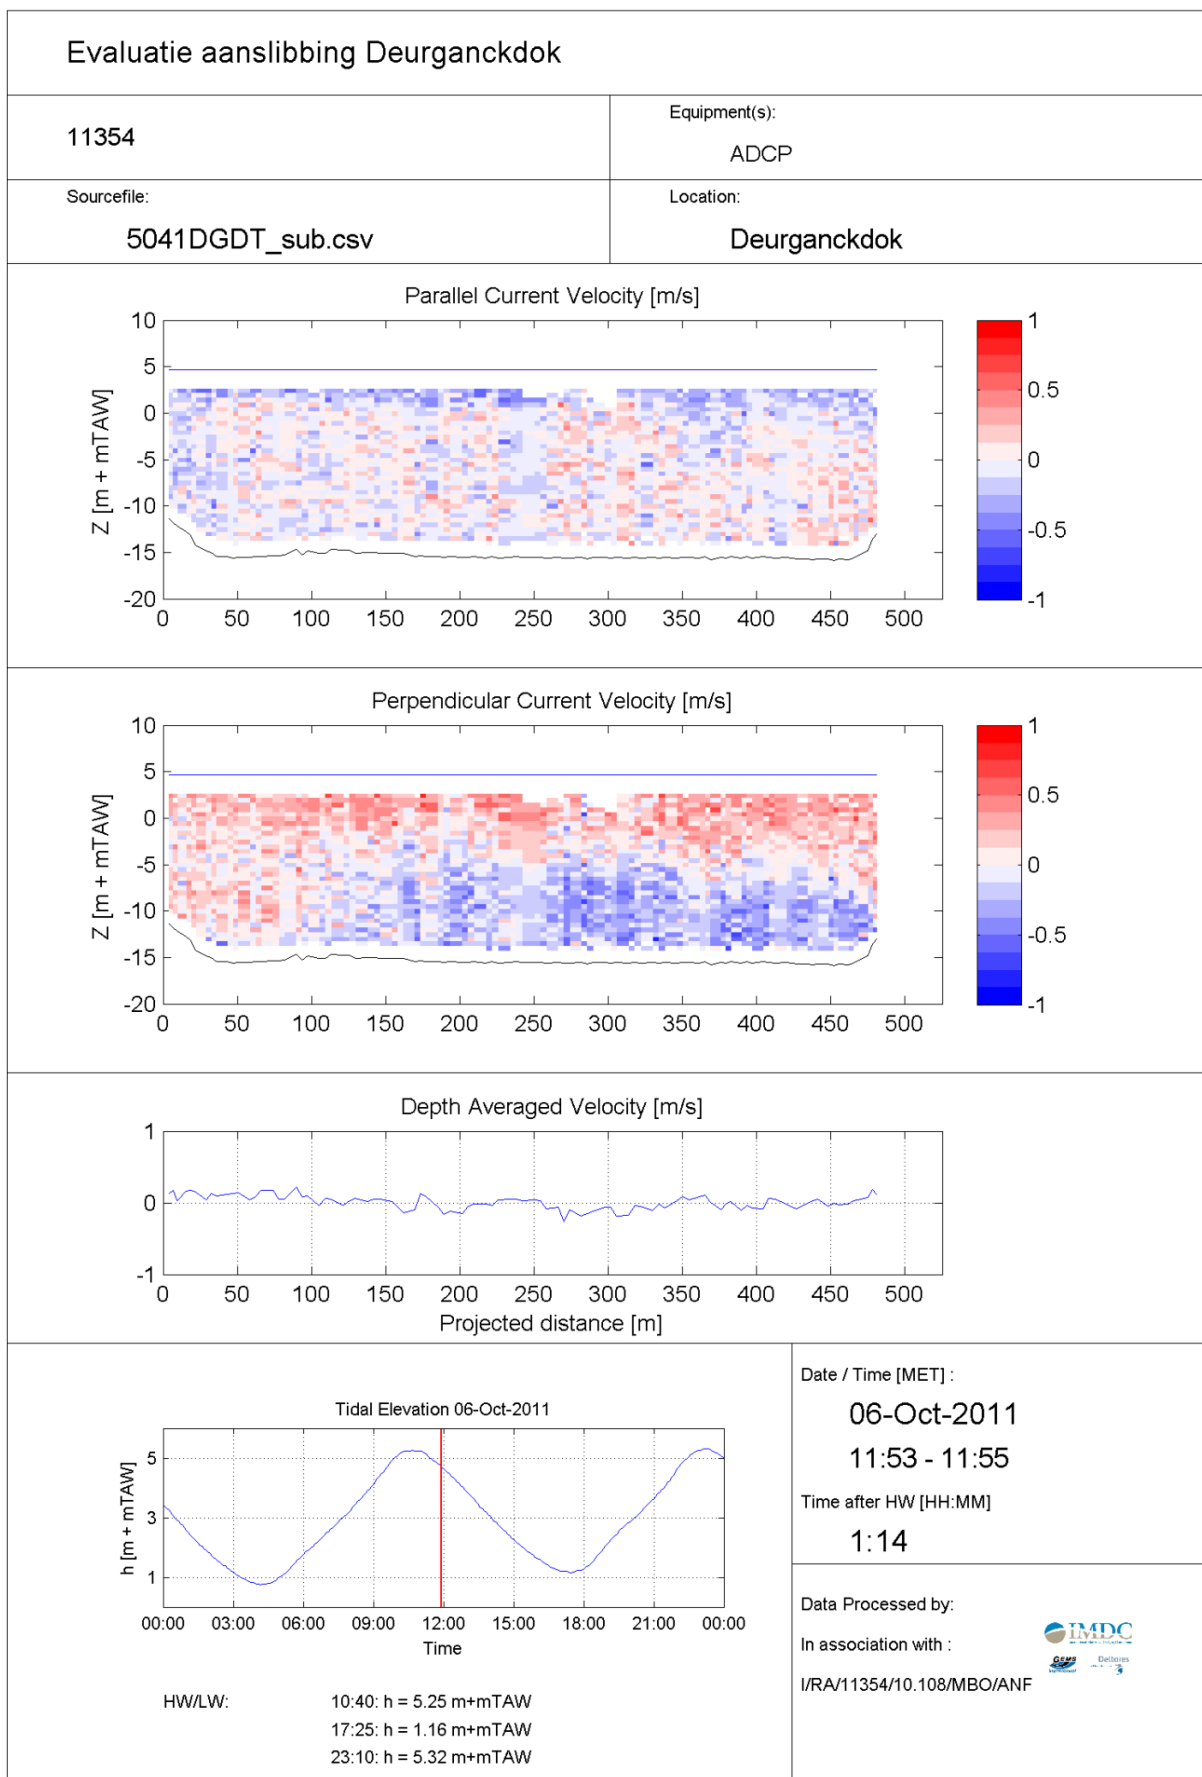

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5041DGDT_sub.csv

Location:

Deurganckdok

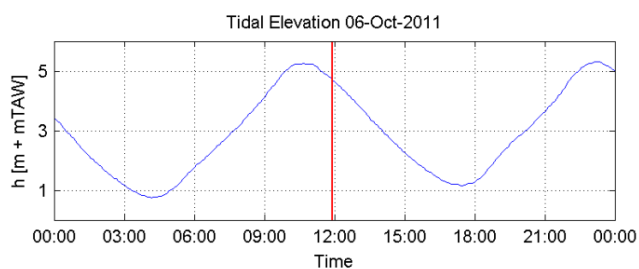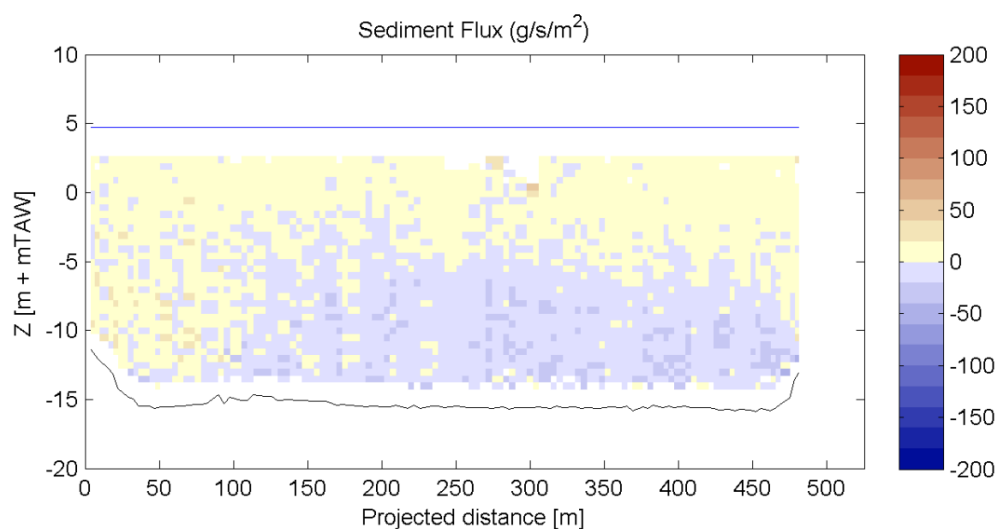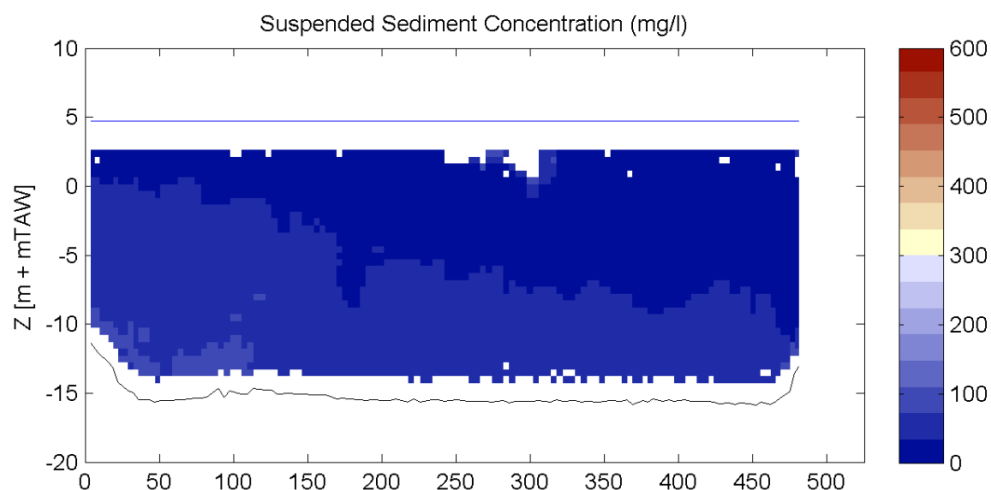

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

11:53 - 11:55

Time after HW [HH:MM]


1:14


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



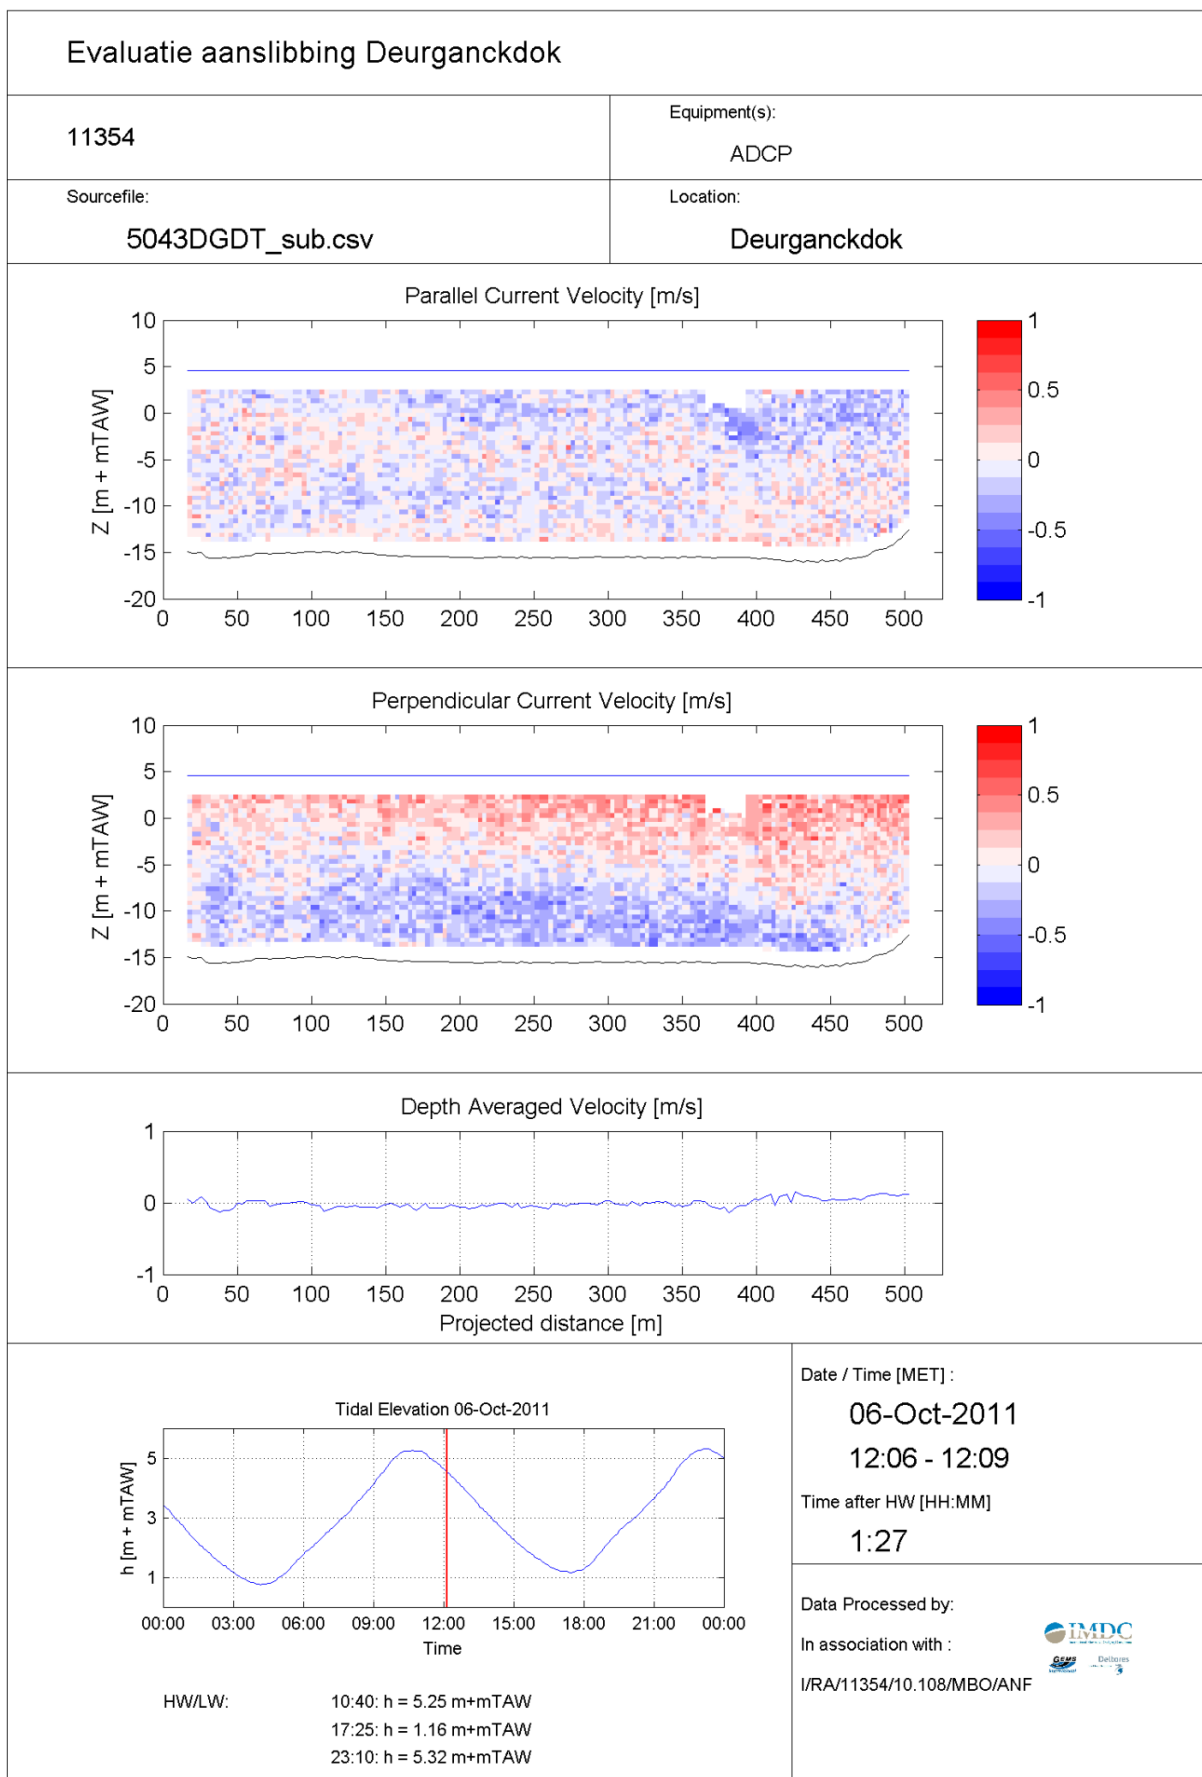

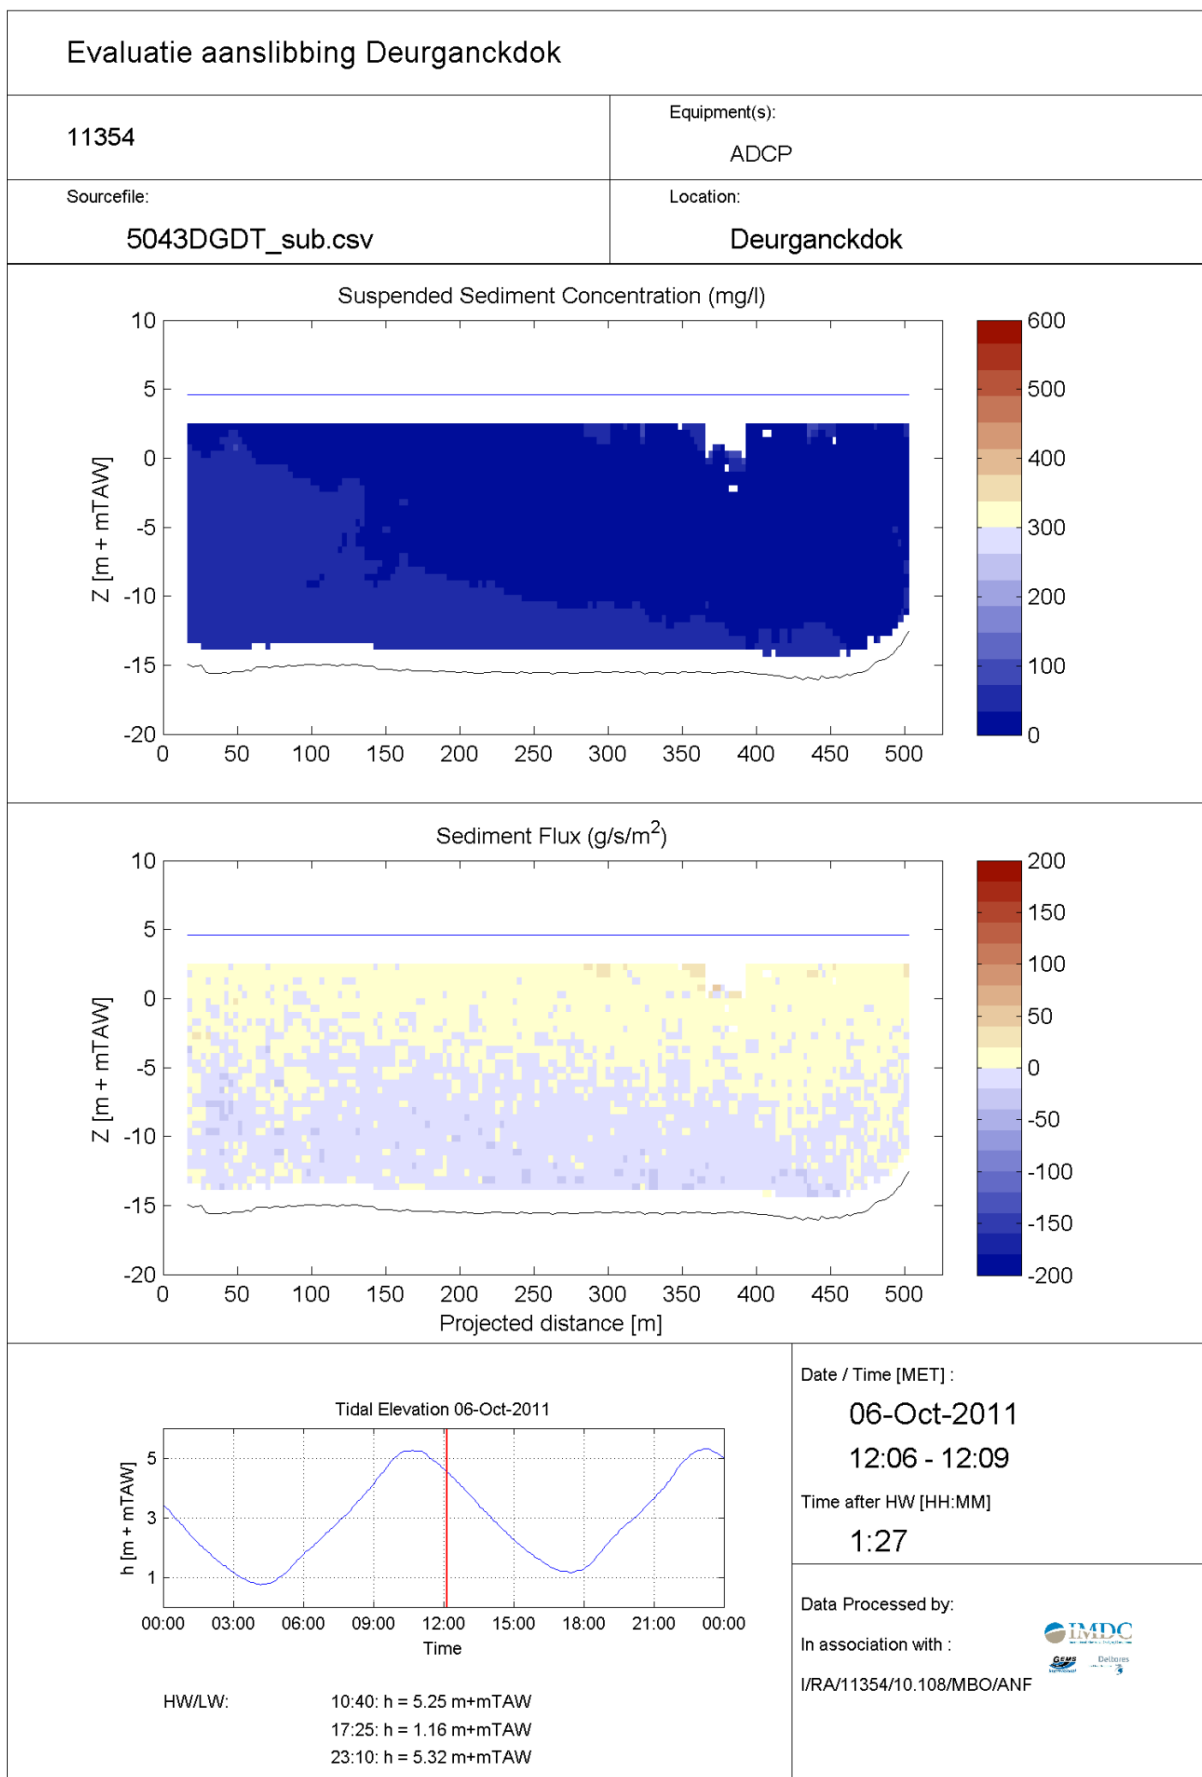

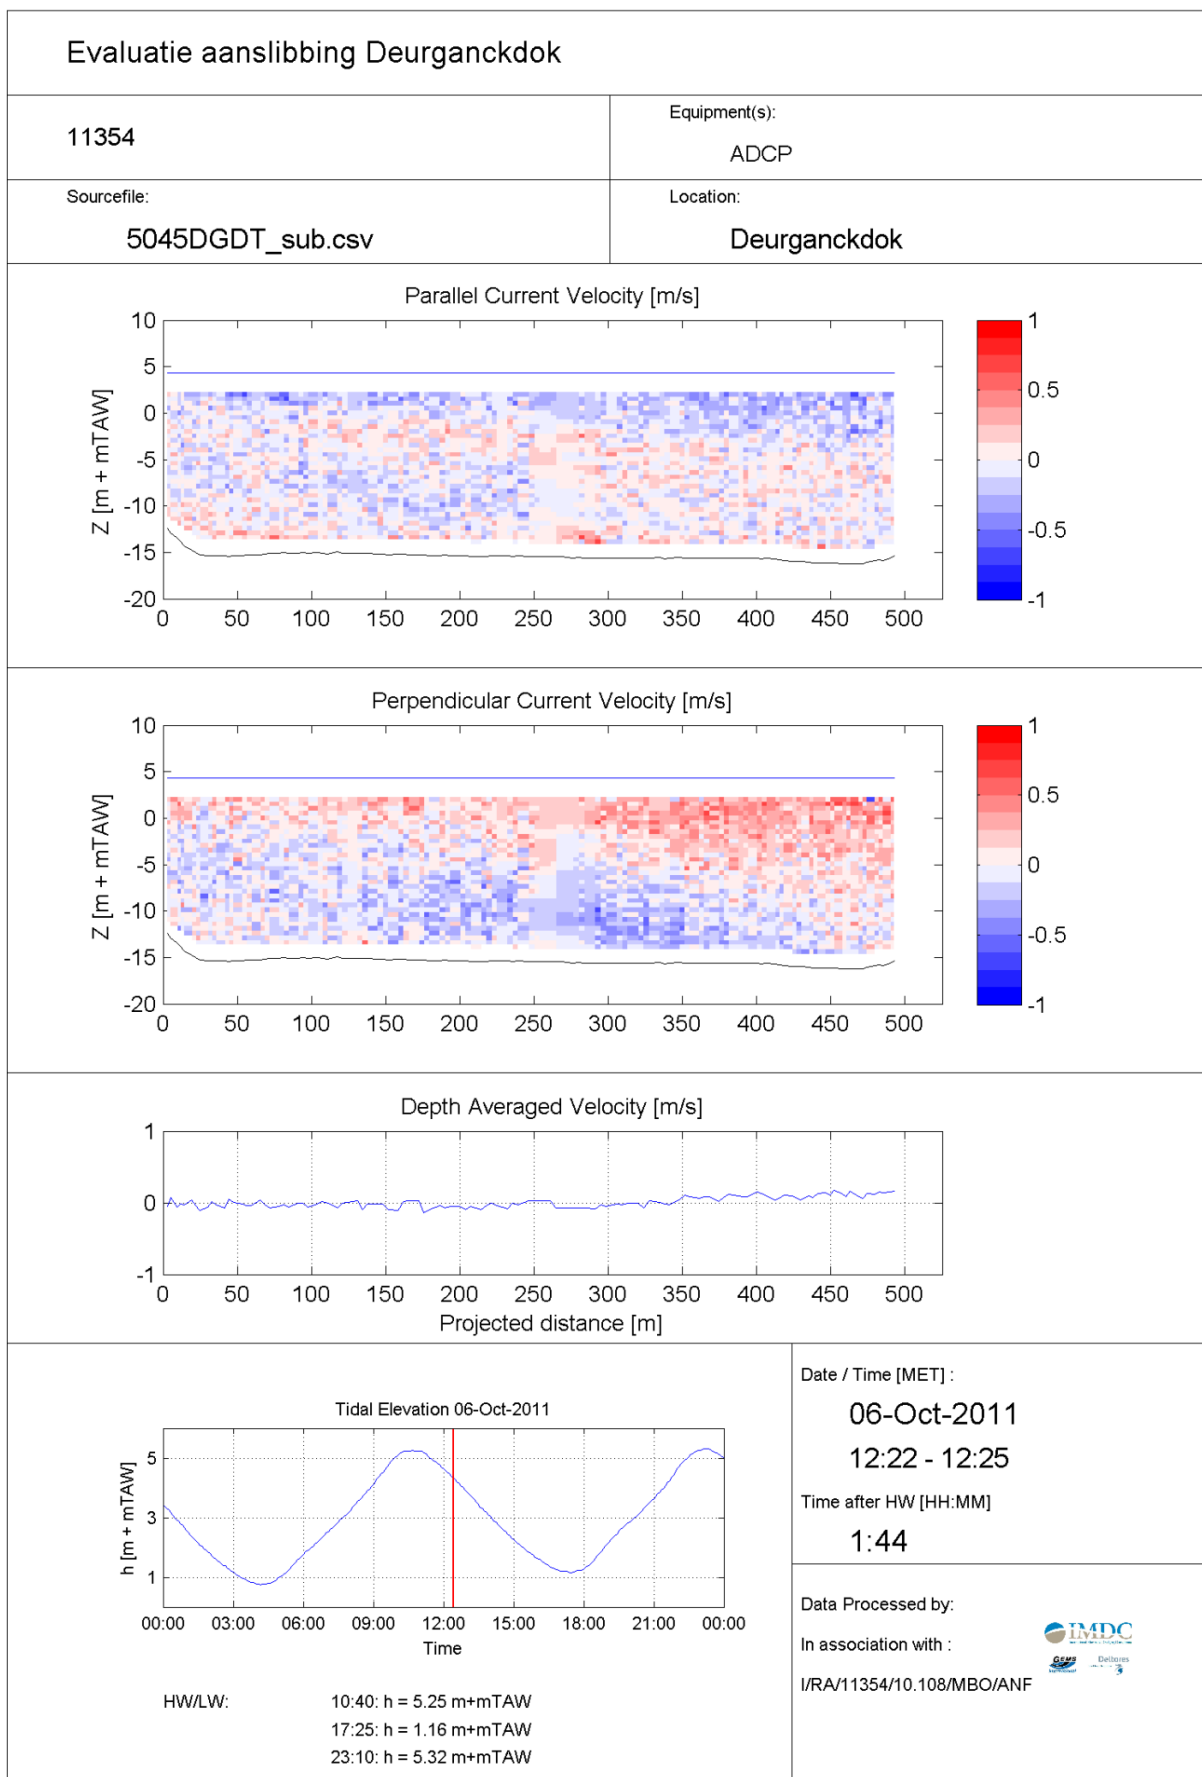

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5045DGDT_sub.csv

Location:

Deurganckdok

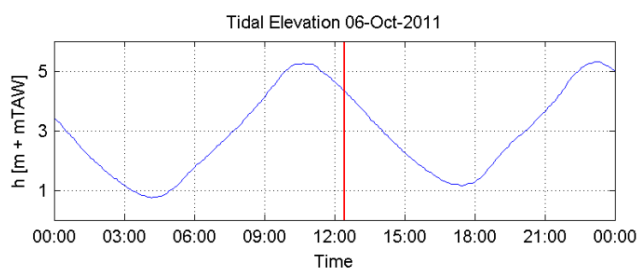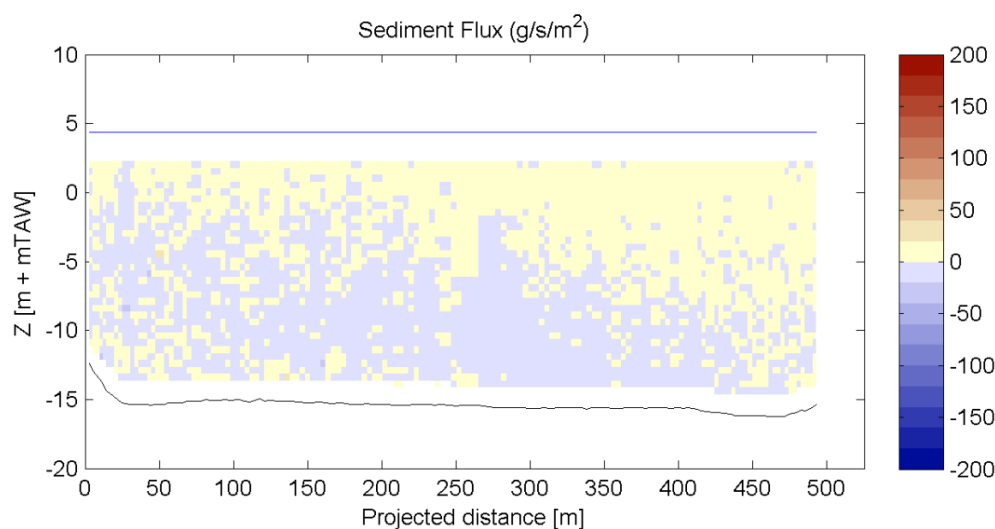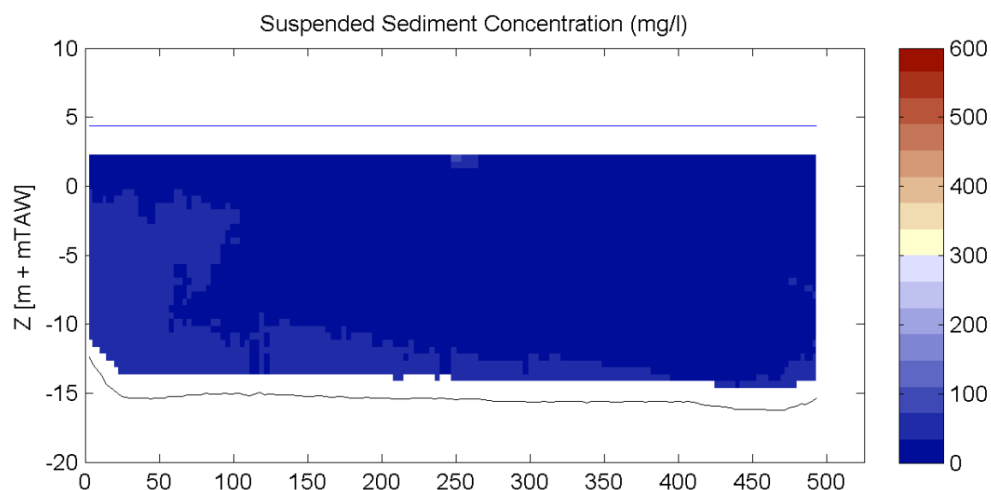

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

12:22 - 12:25

Time after HW [HH:MM]


1:44


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



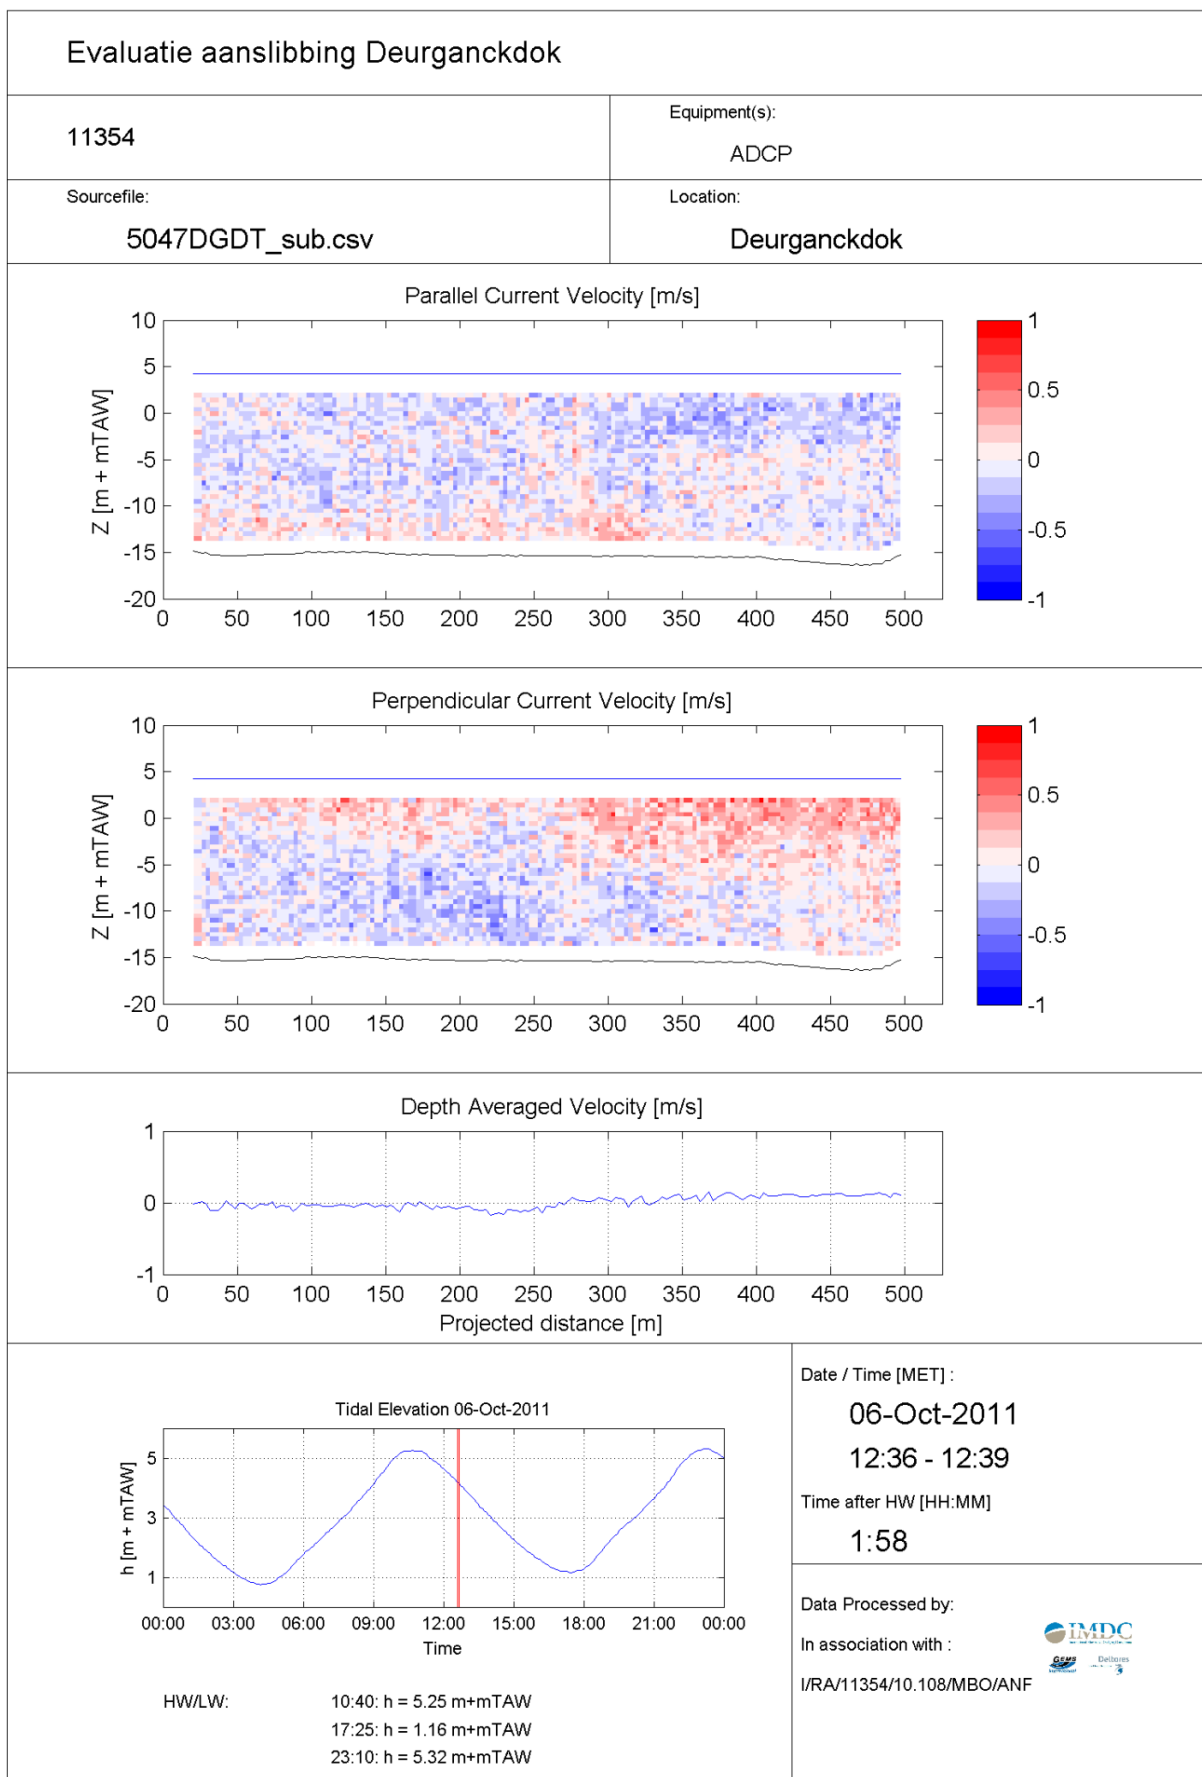

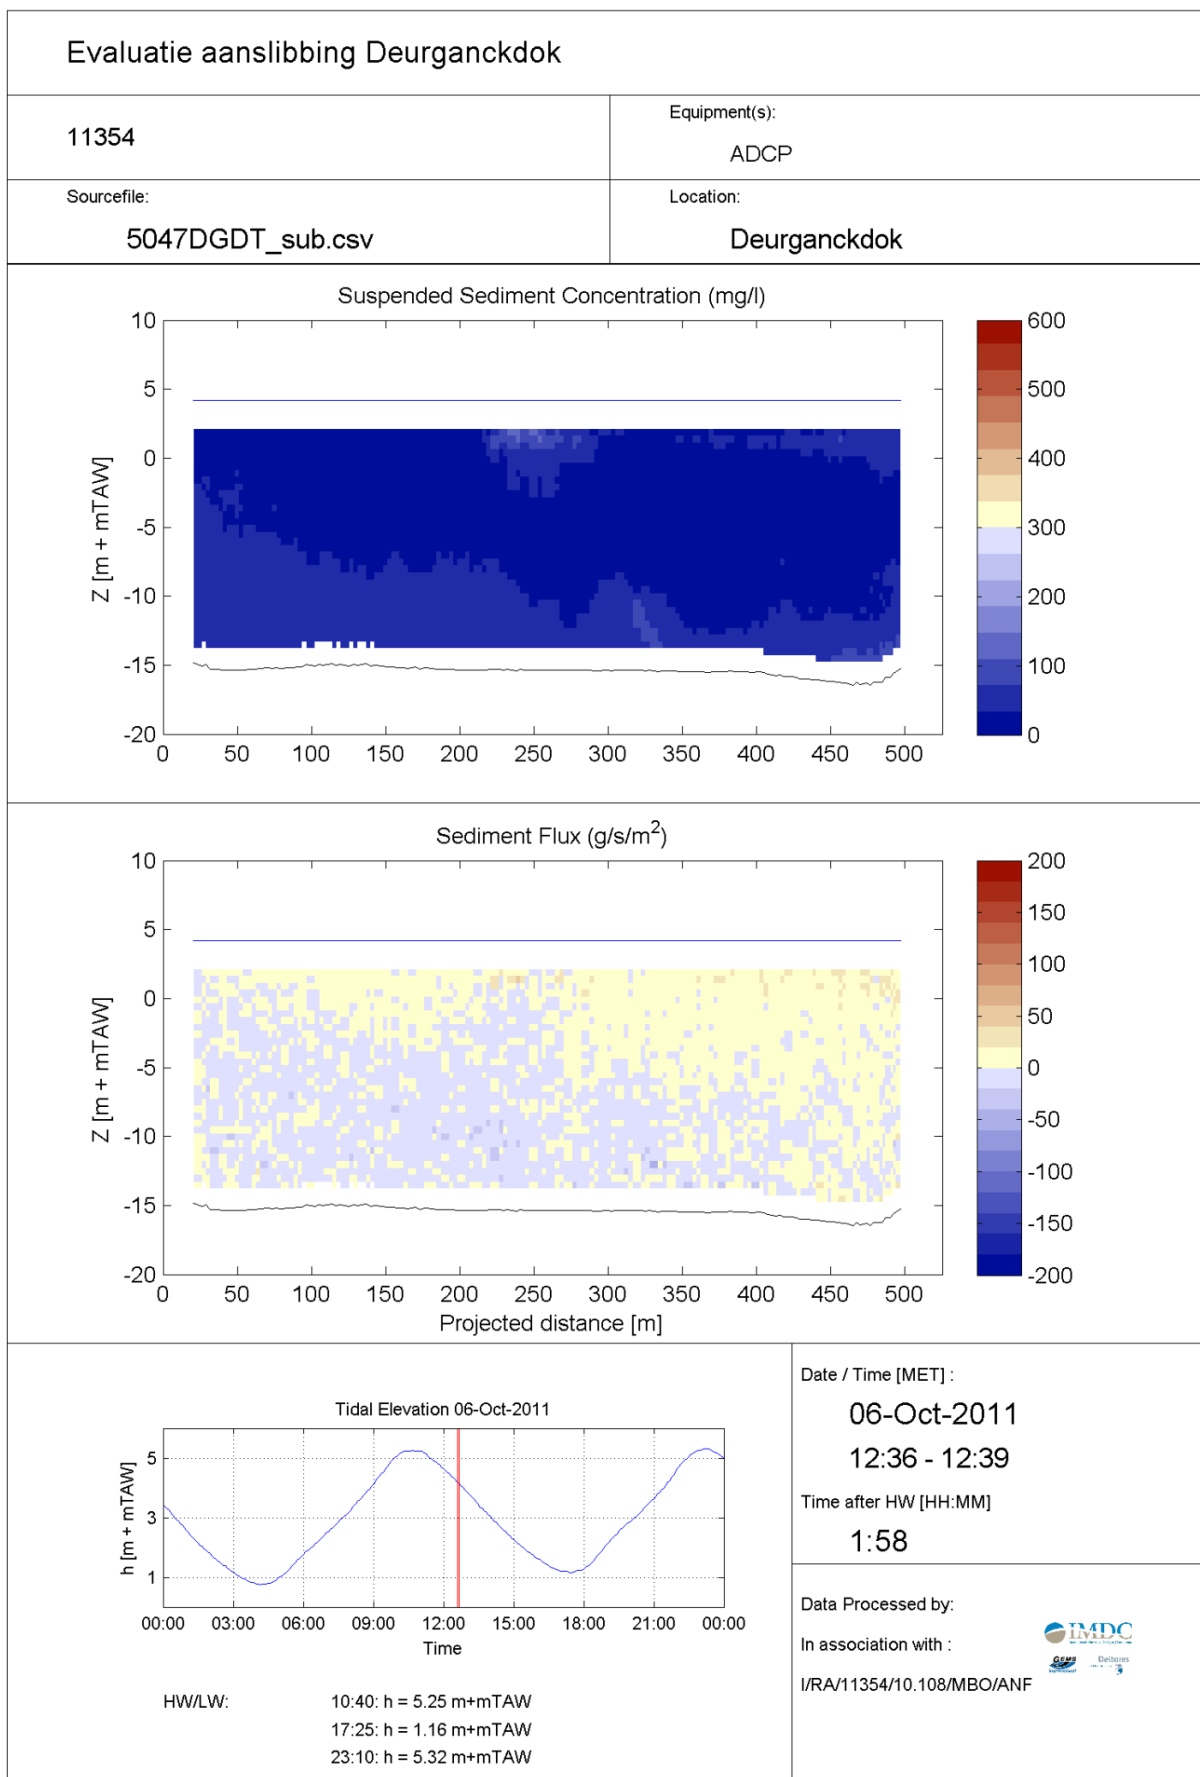

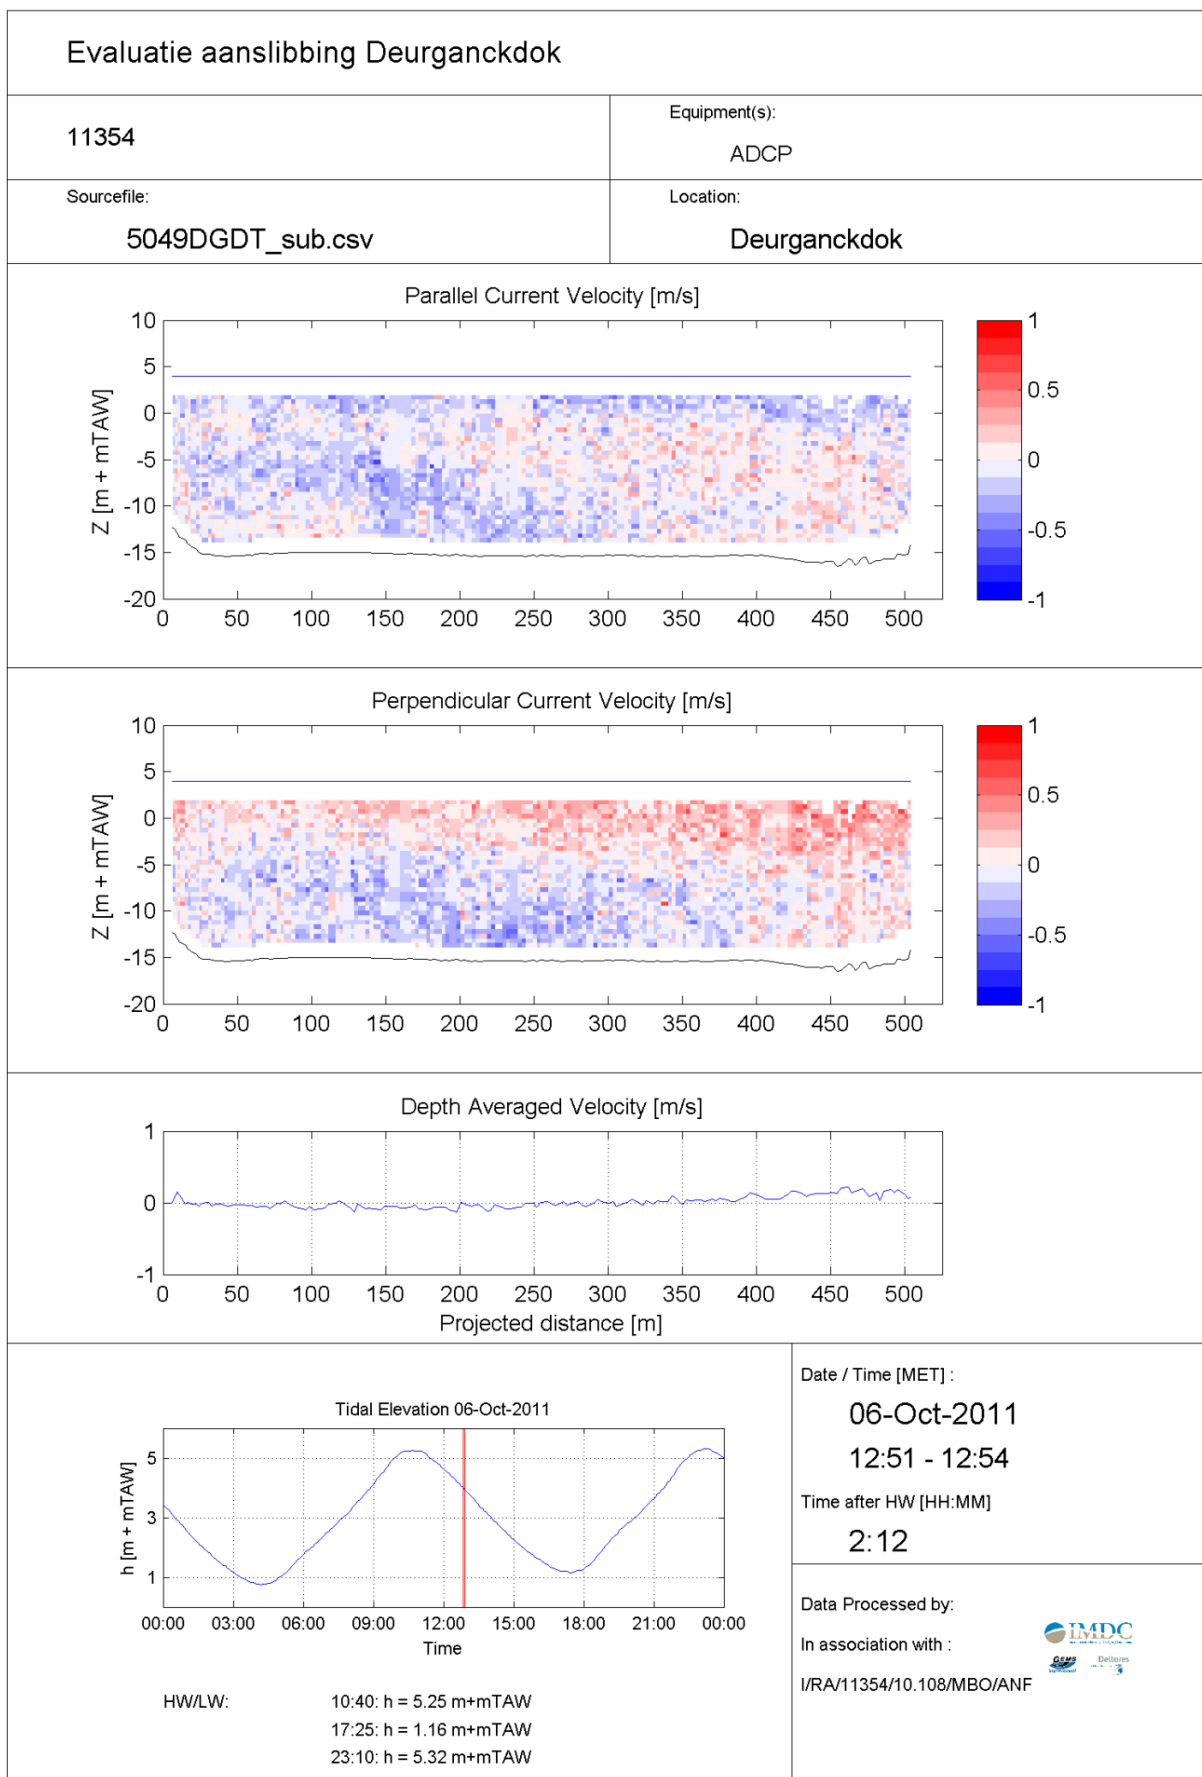

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5049DGDT_sub.csv

Location:

Deurganckdok

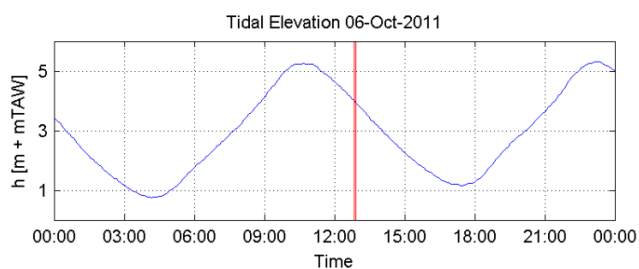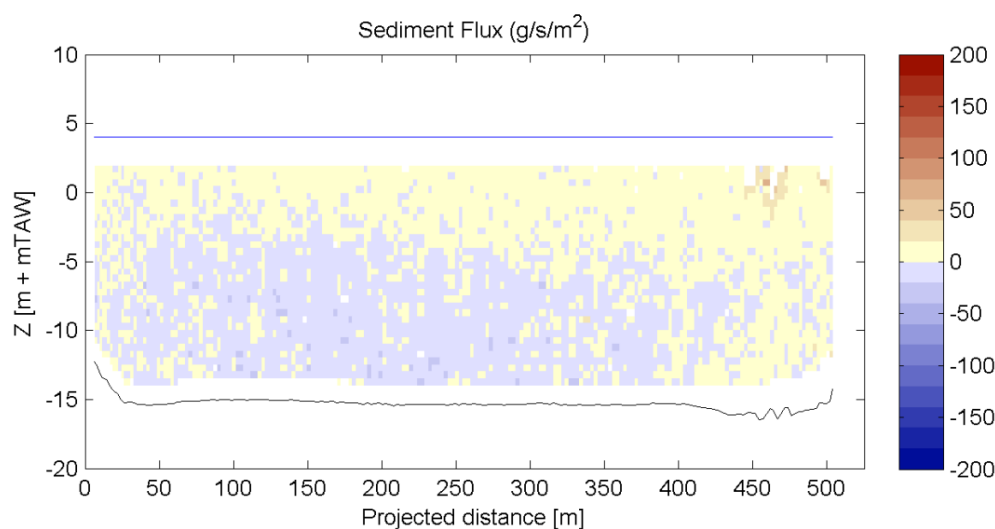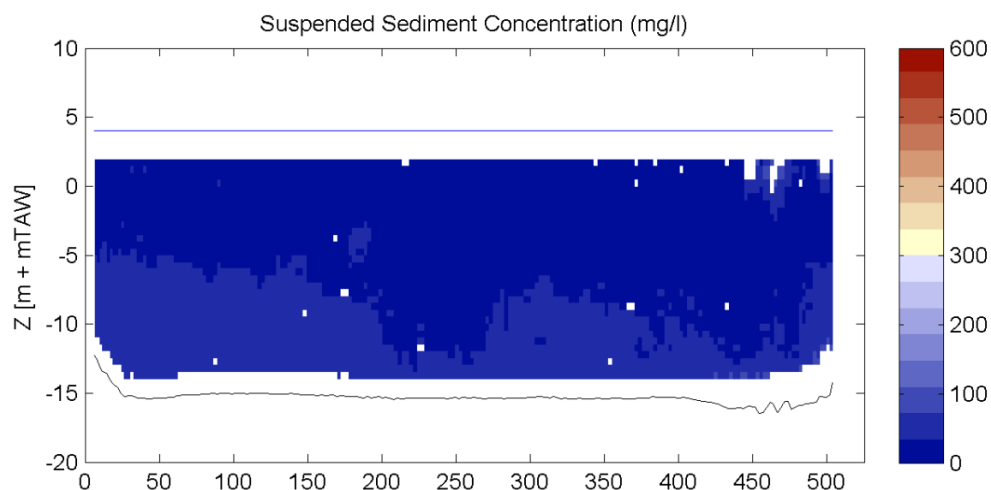

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

12:51 - 12:54

Time after HW [HH:MM]


2:12


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




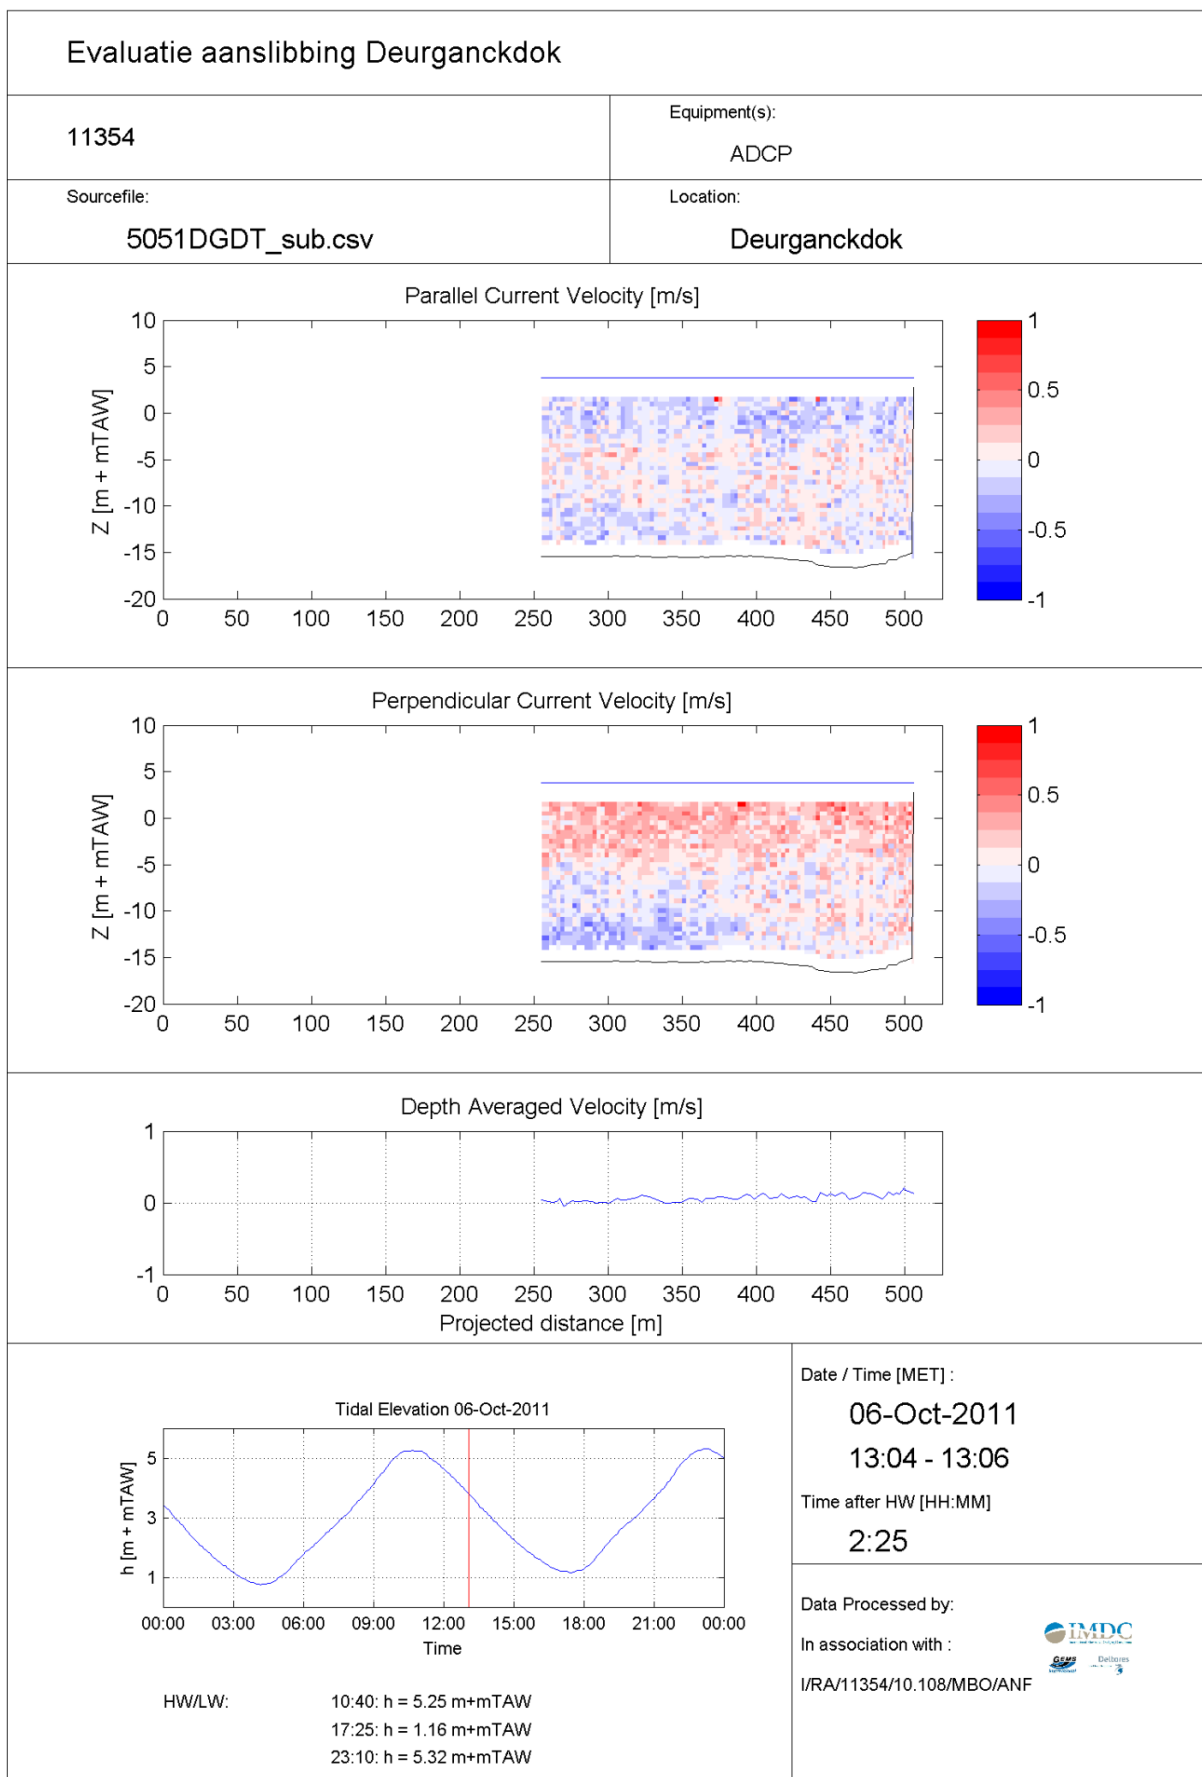


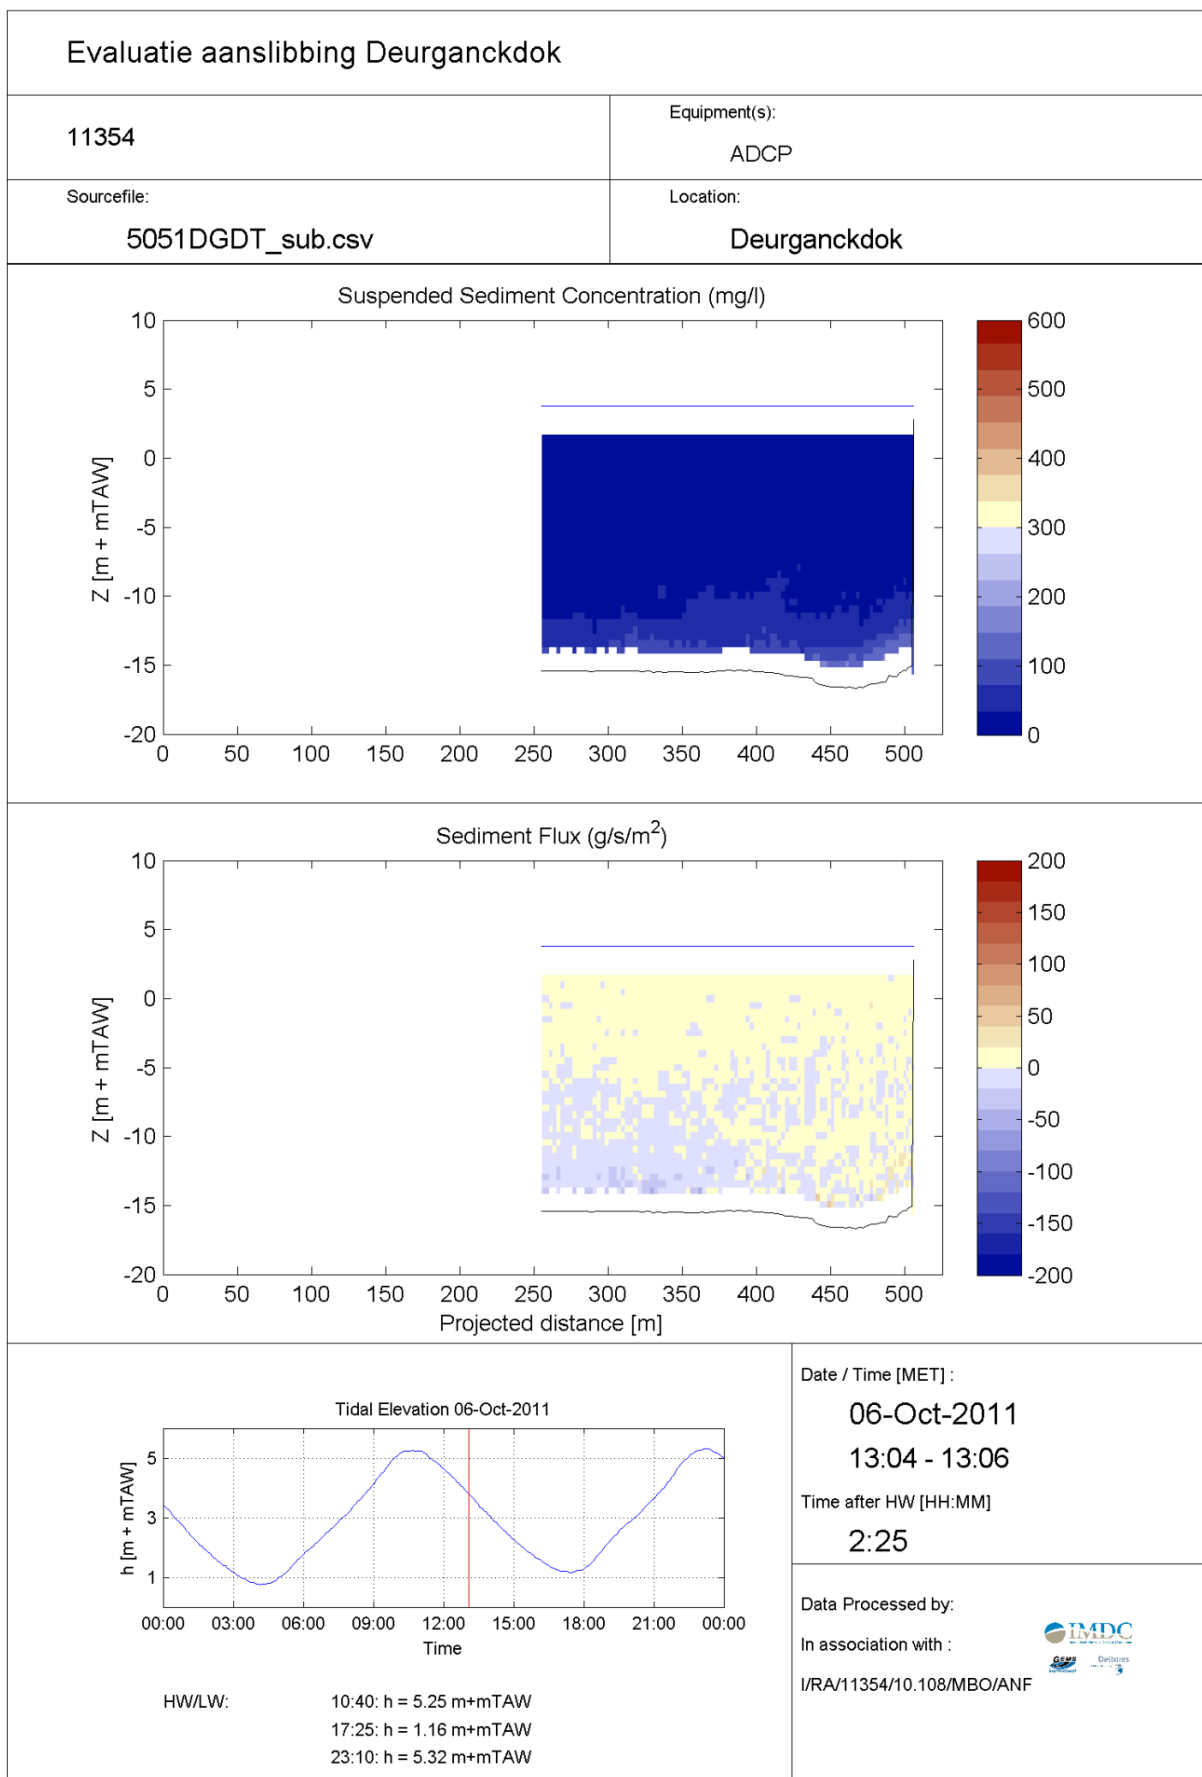


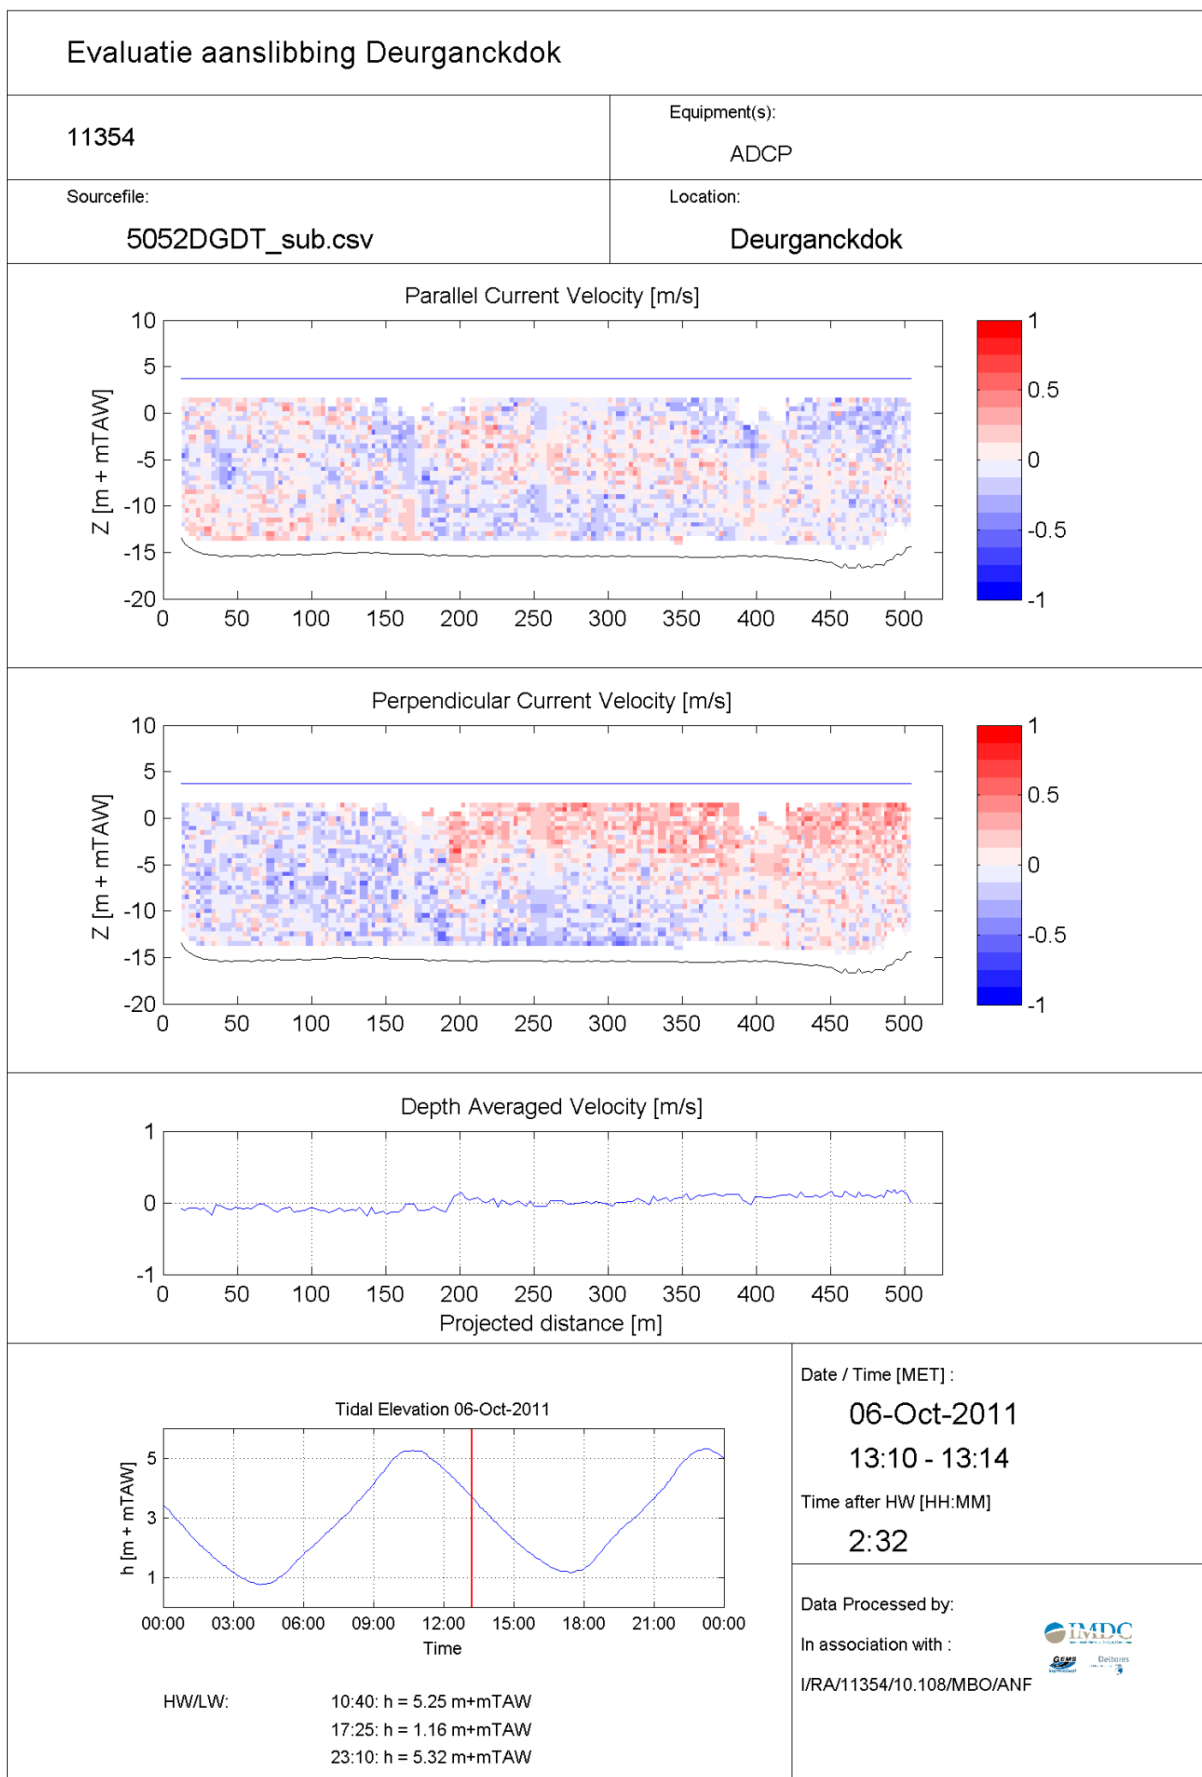


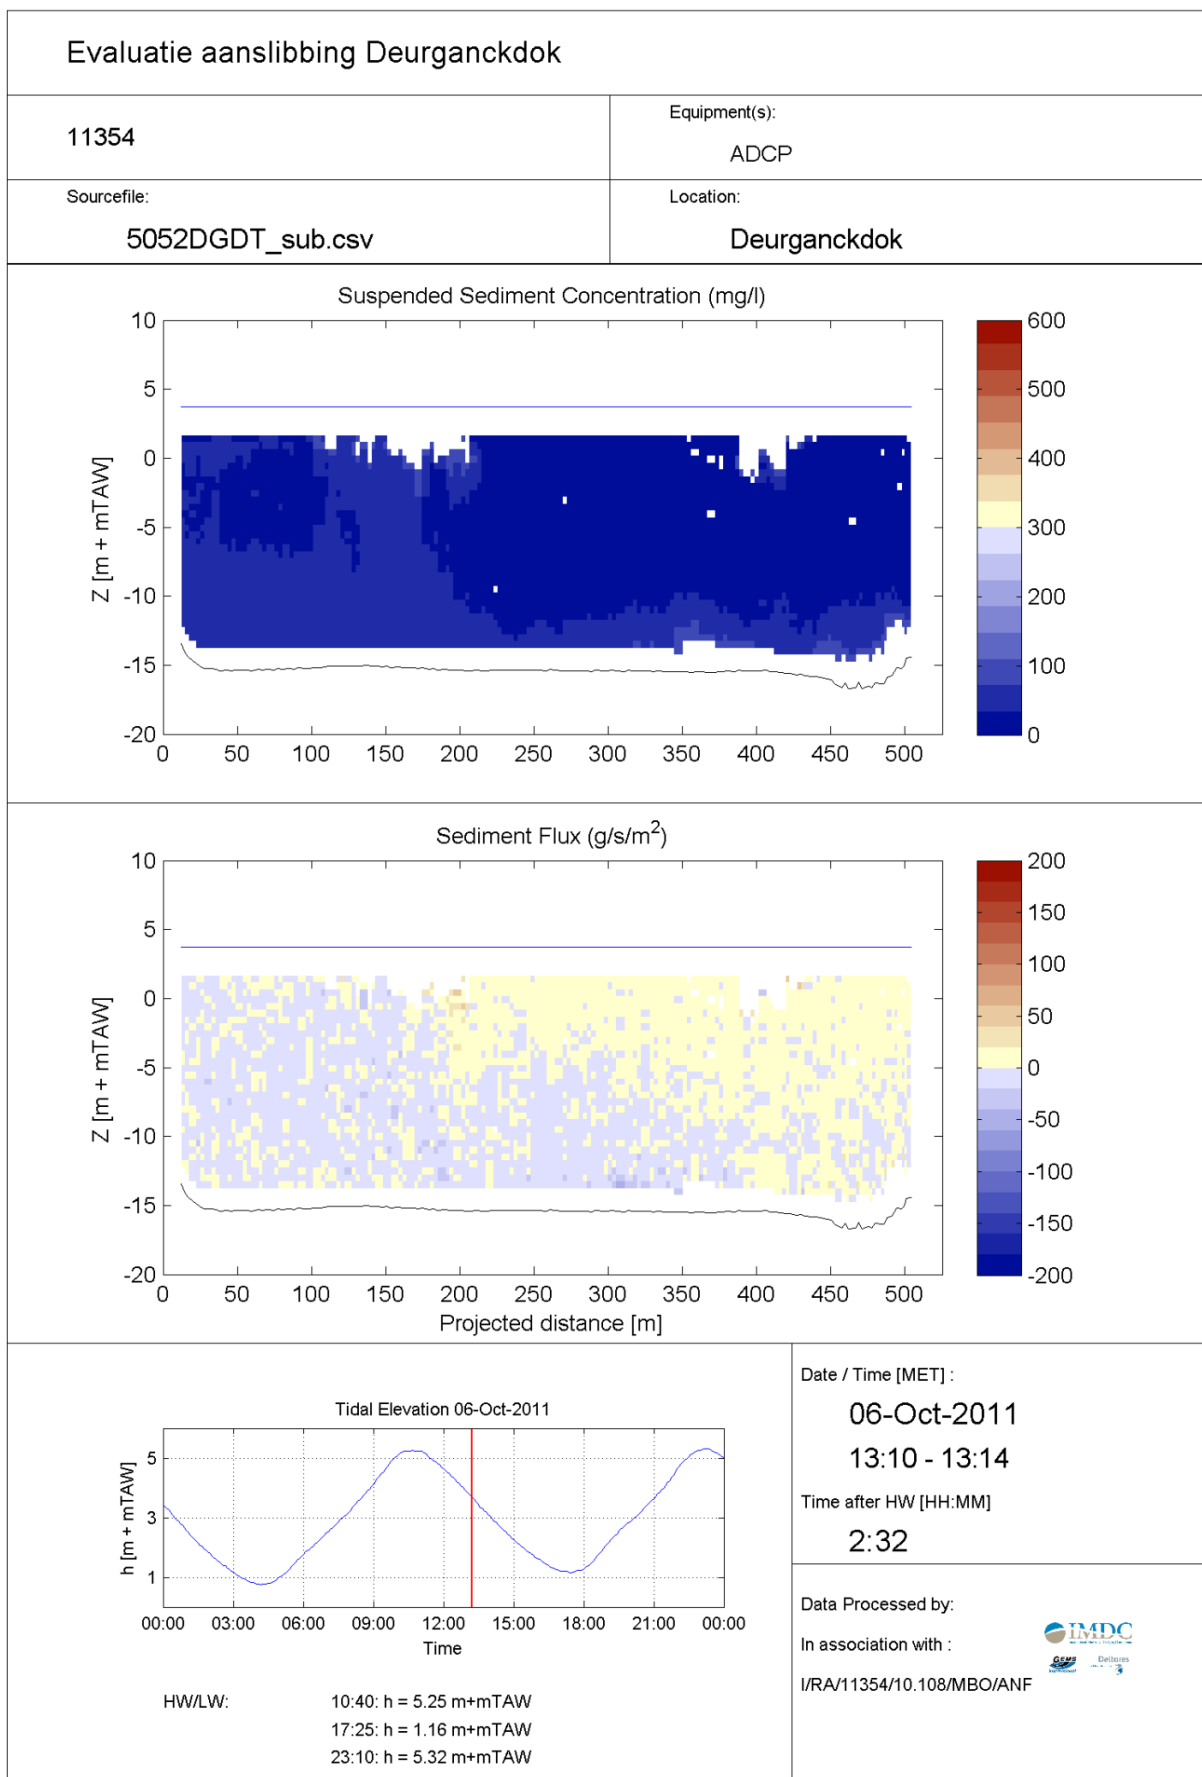


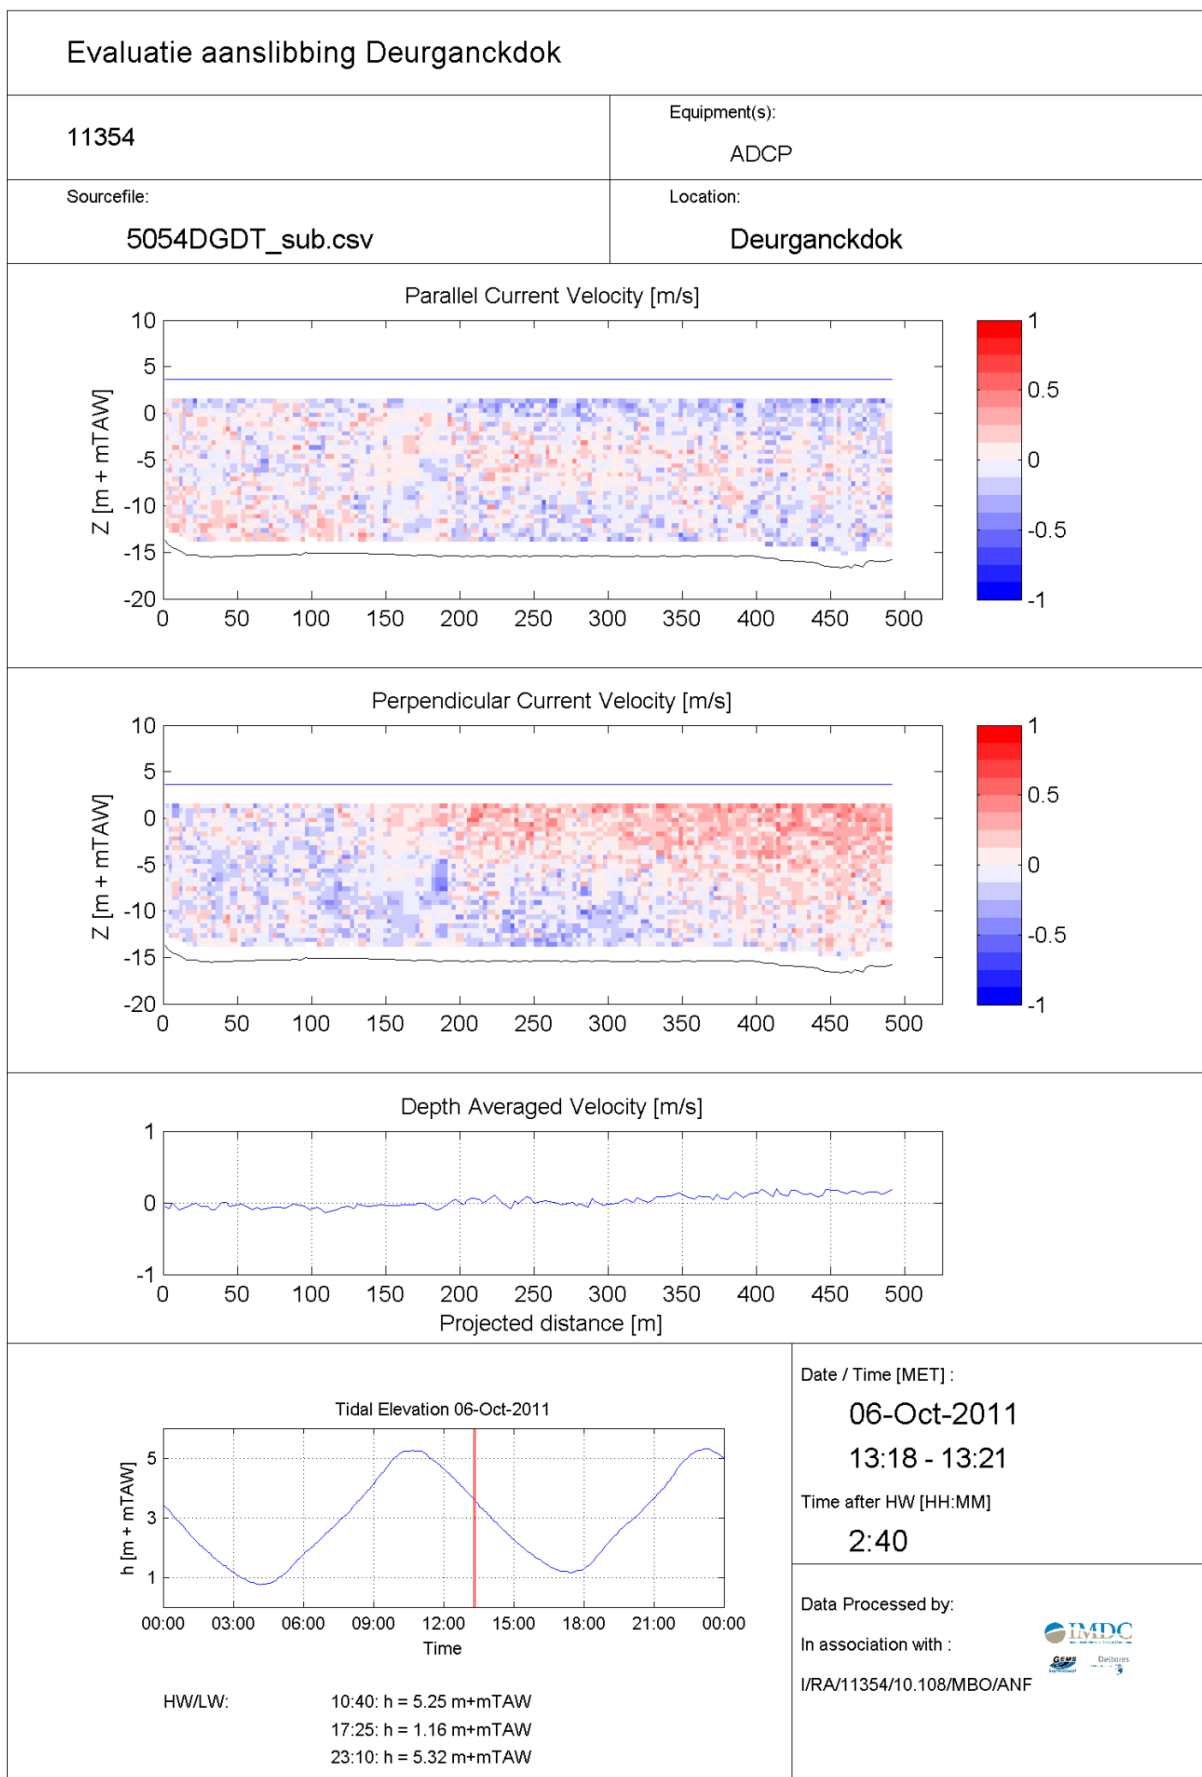

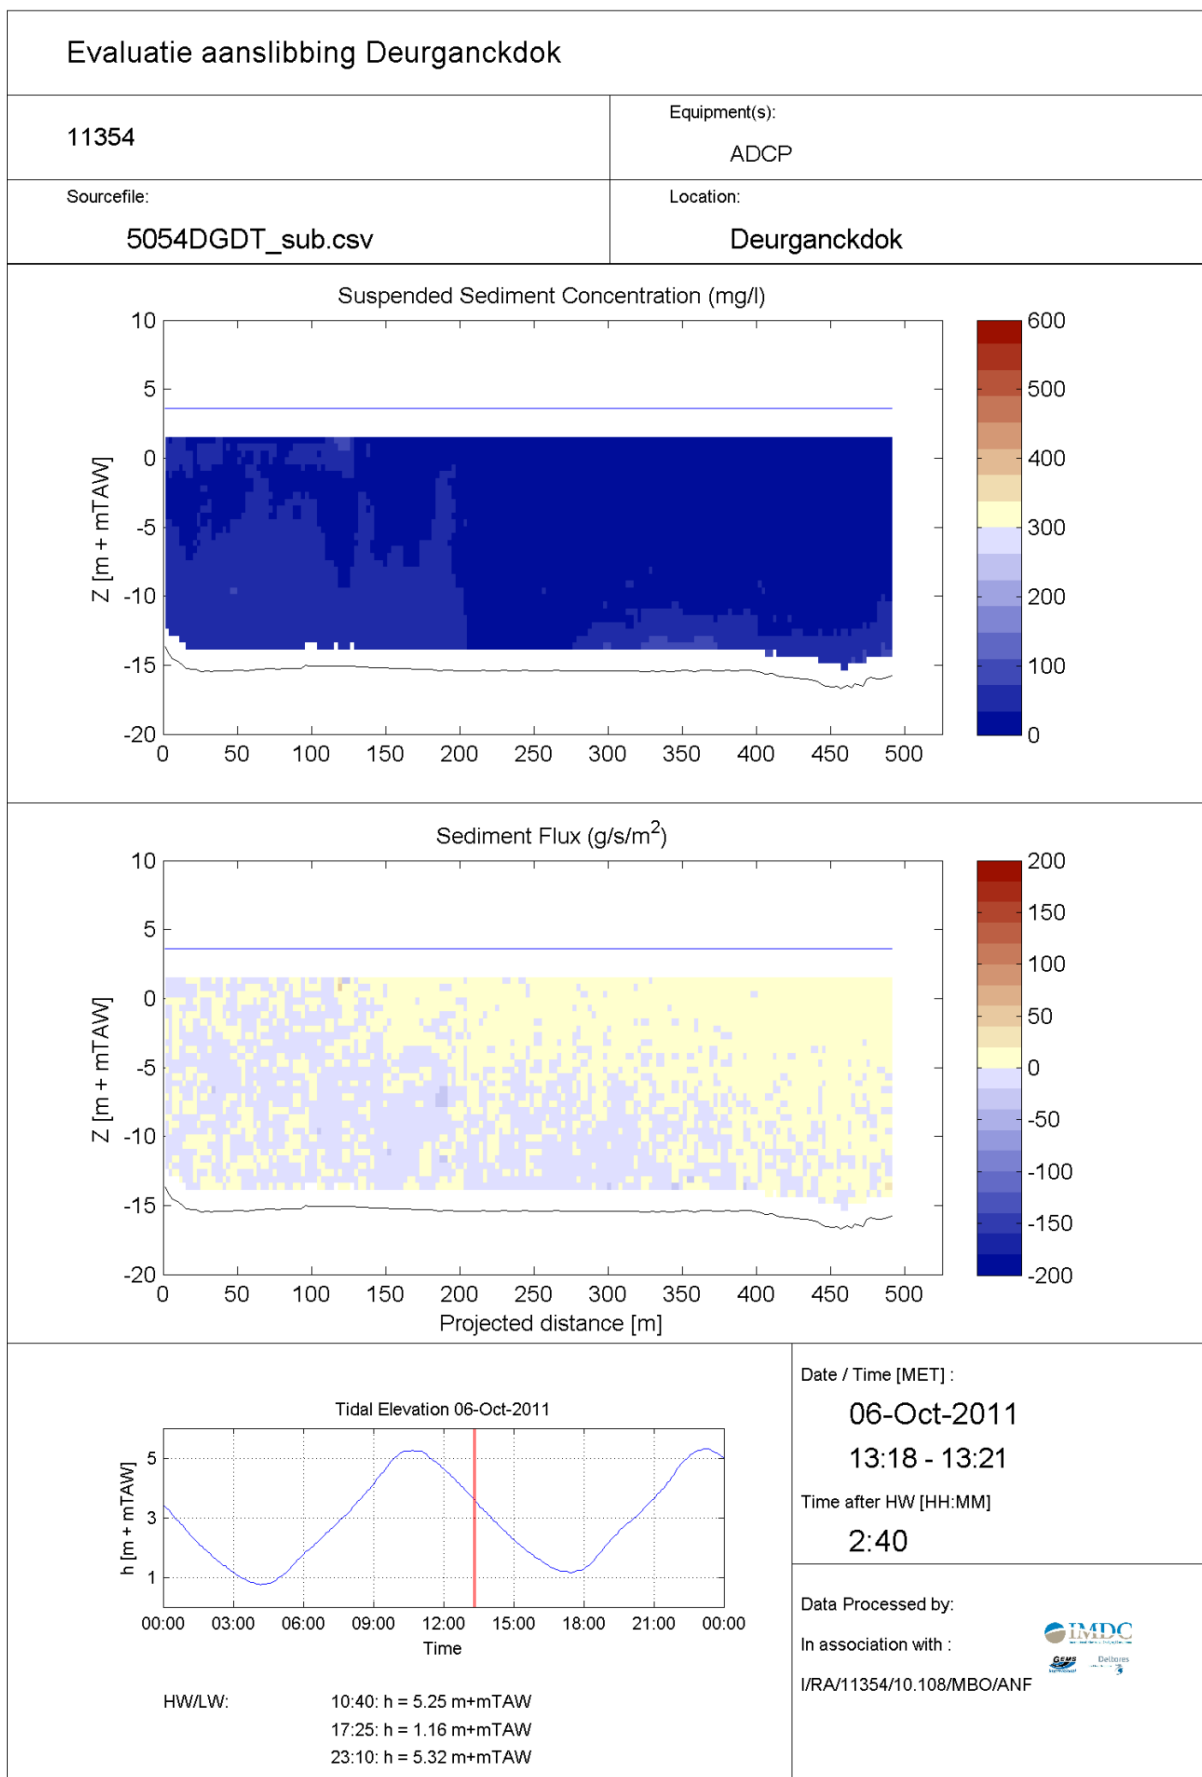

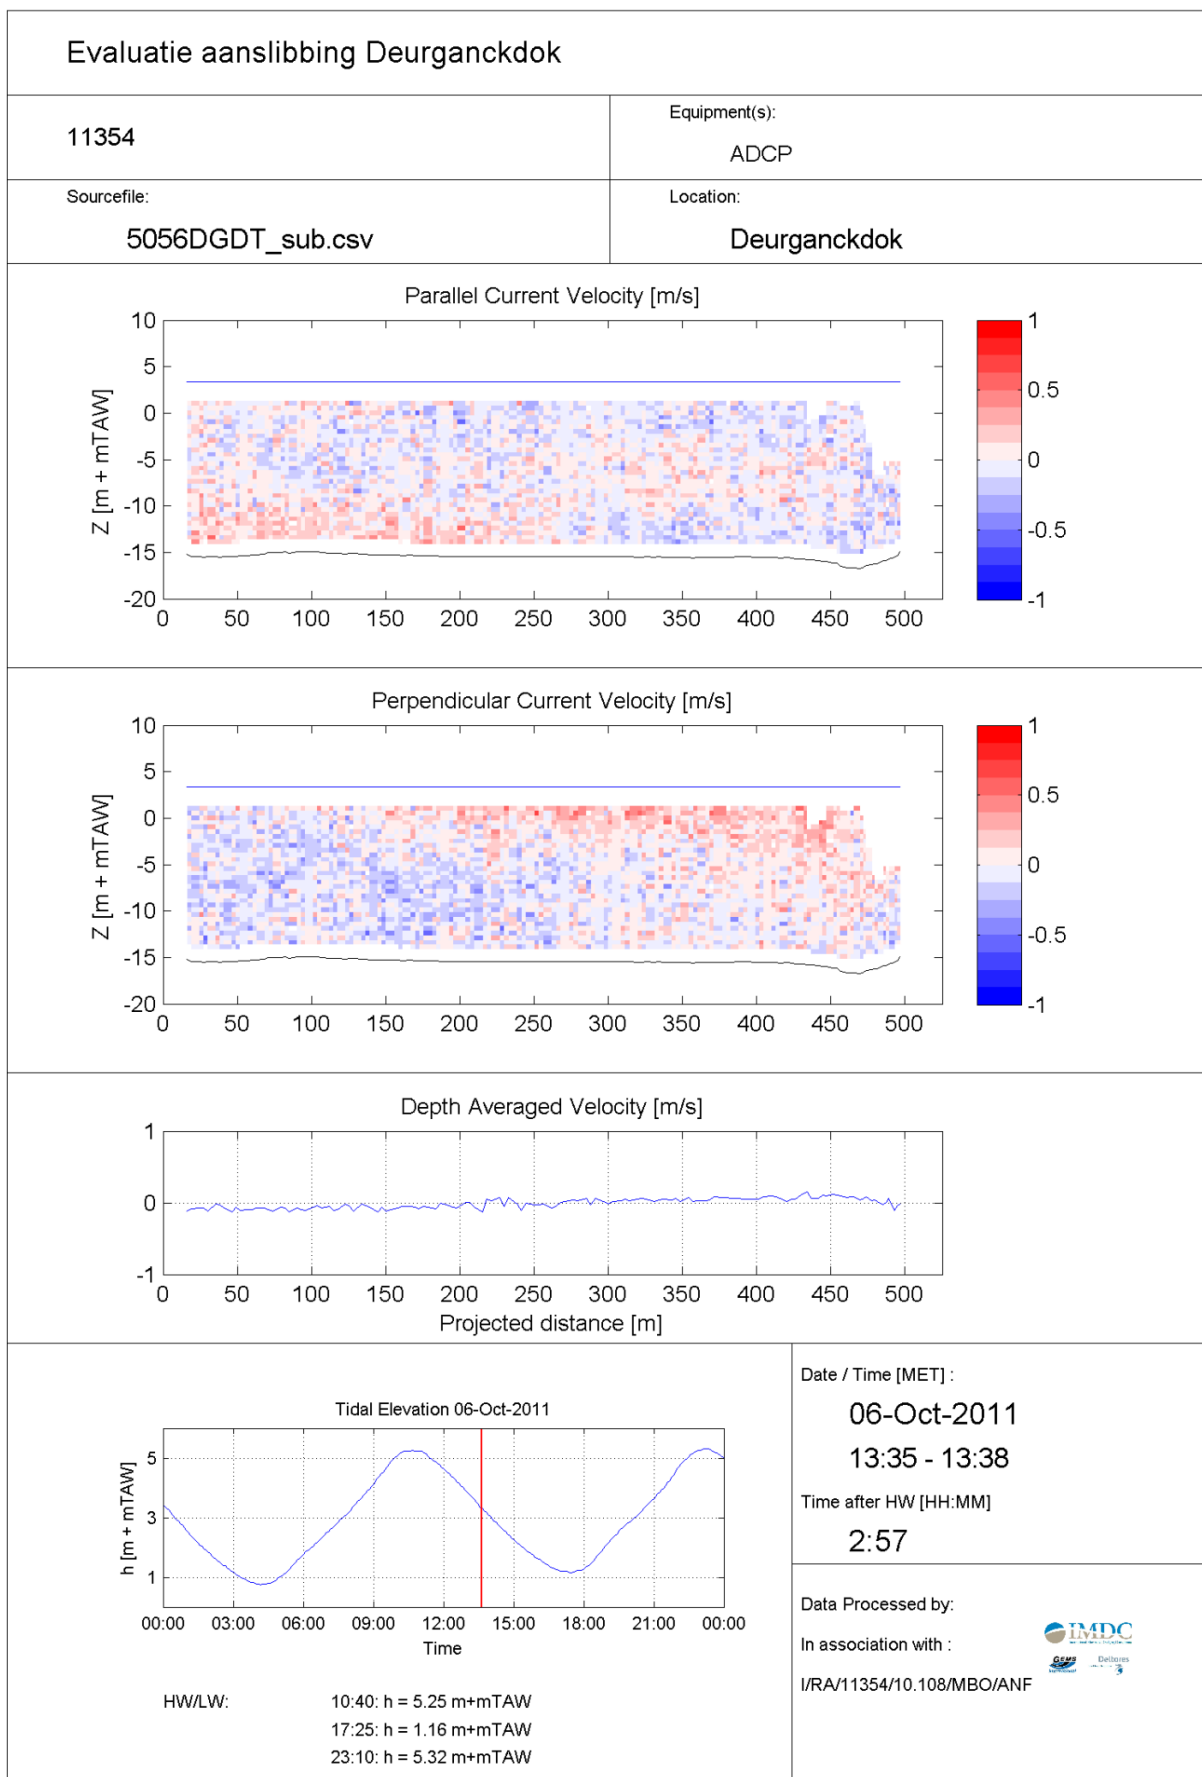

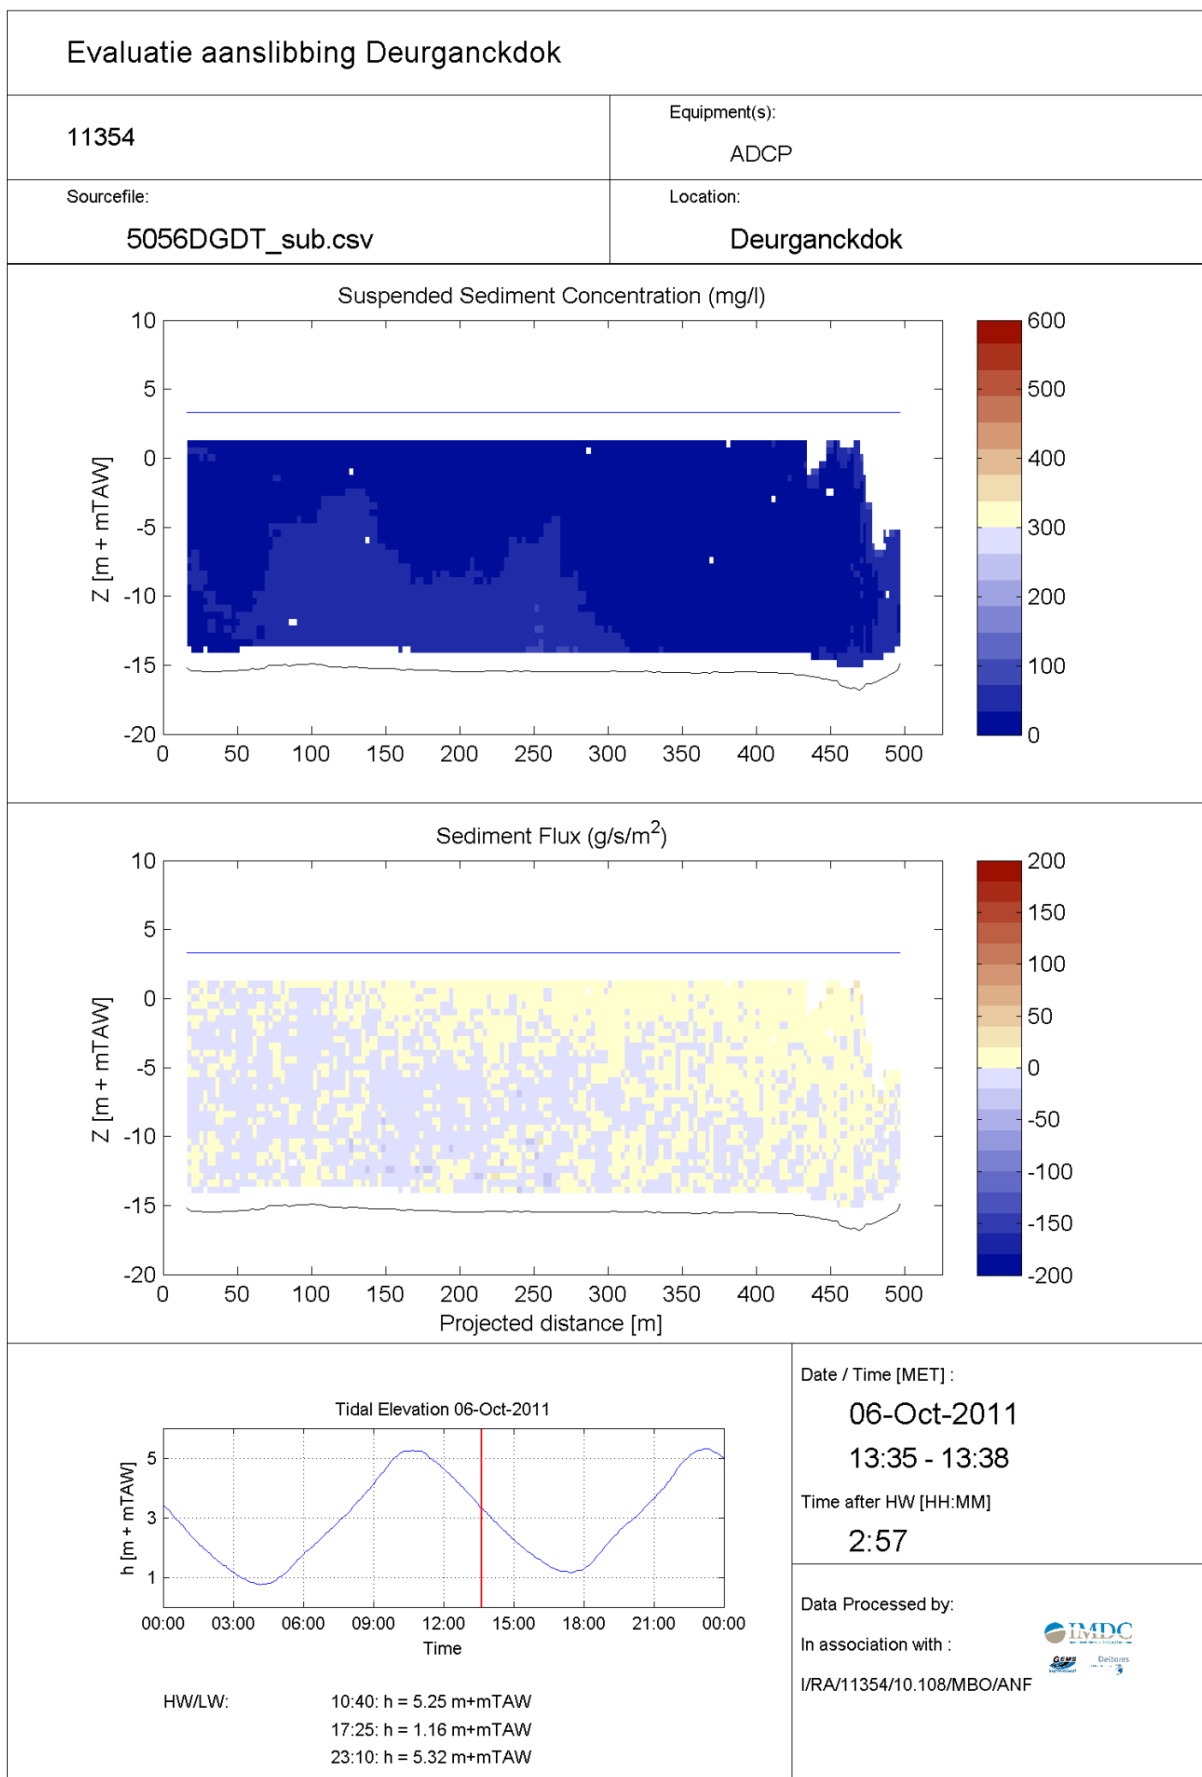

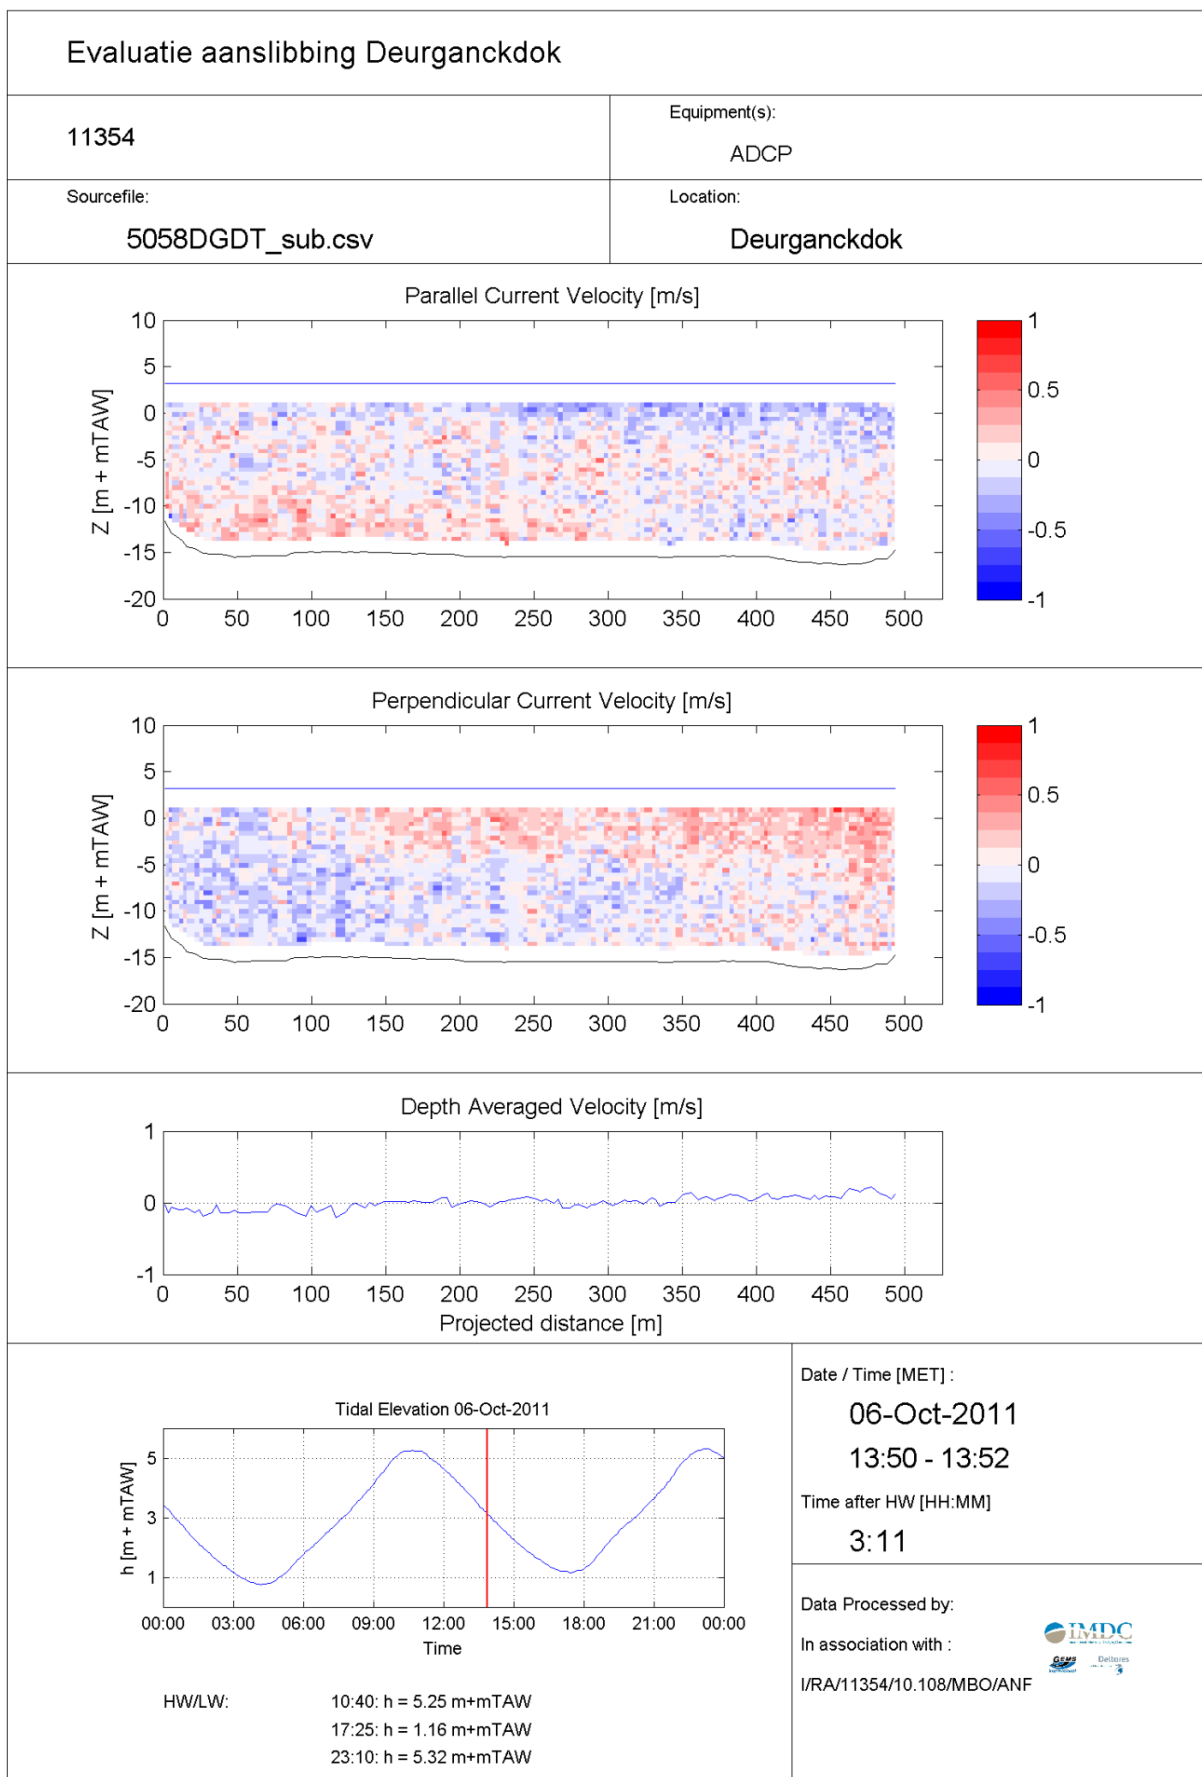

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5058DGDT_sub.csv

Location:

Deurganckdok

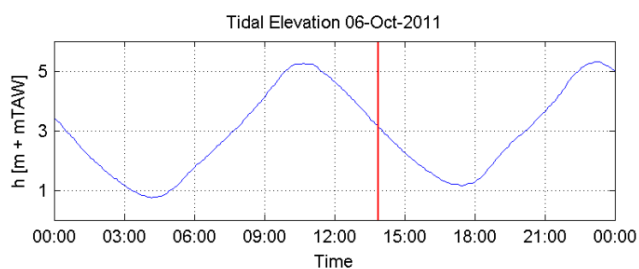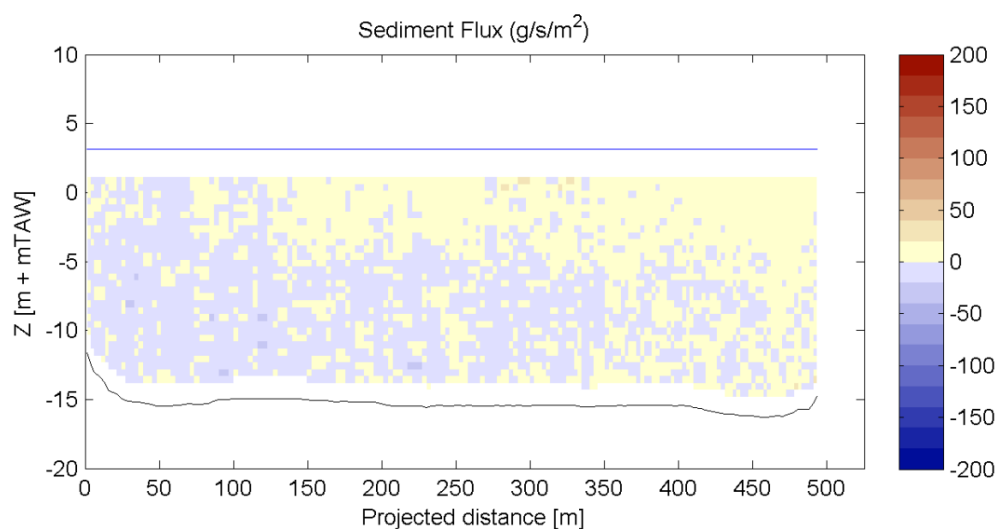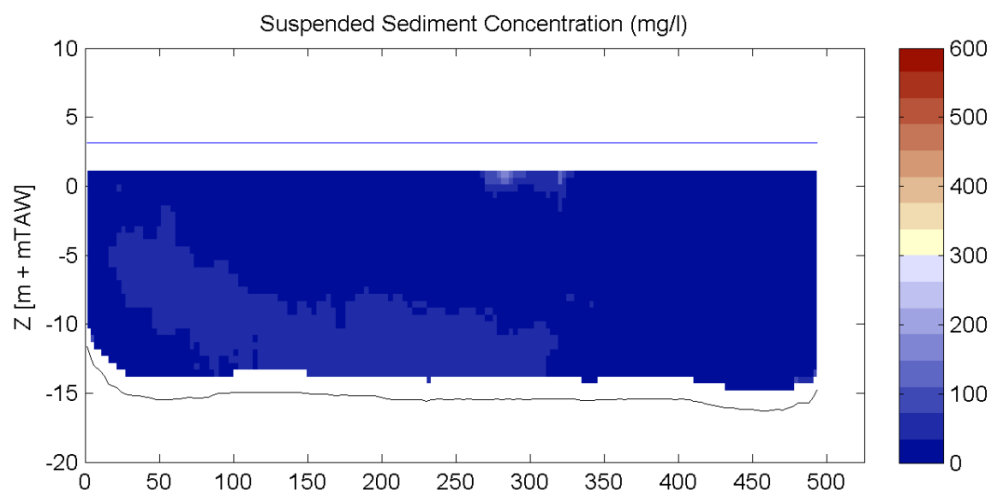

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

13:50 - 13:52

Time after HW [HH:MM]


3:11

Data Processed by:

In association with :

I/RA/11354/10.108/MBO/ANF



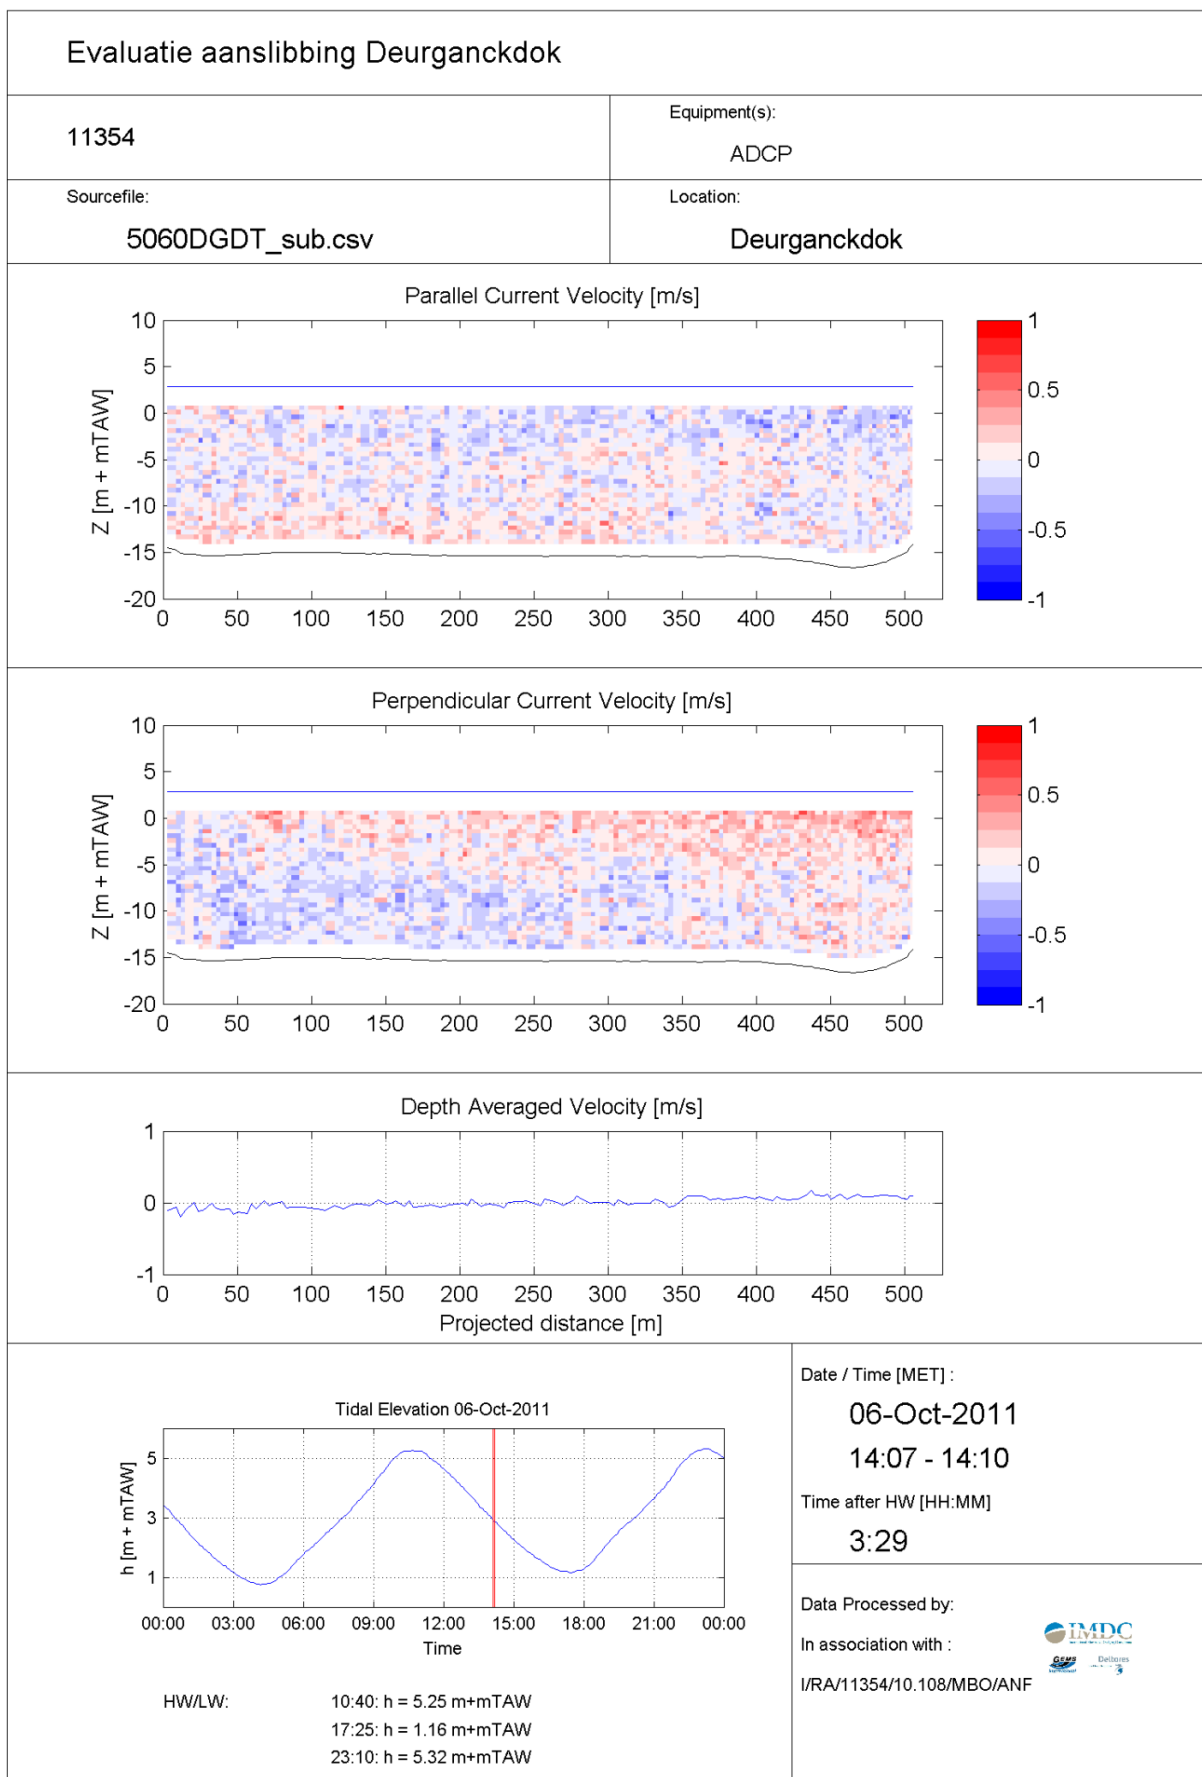

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5060DGDT_sub.csv

Location:

Deurganckdok

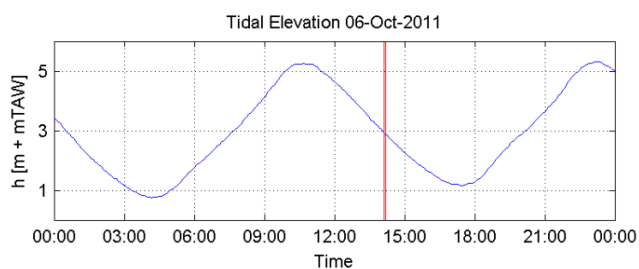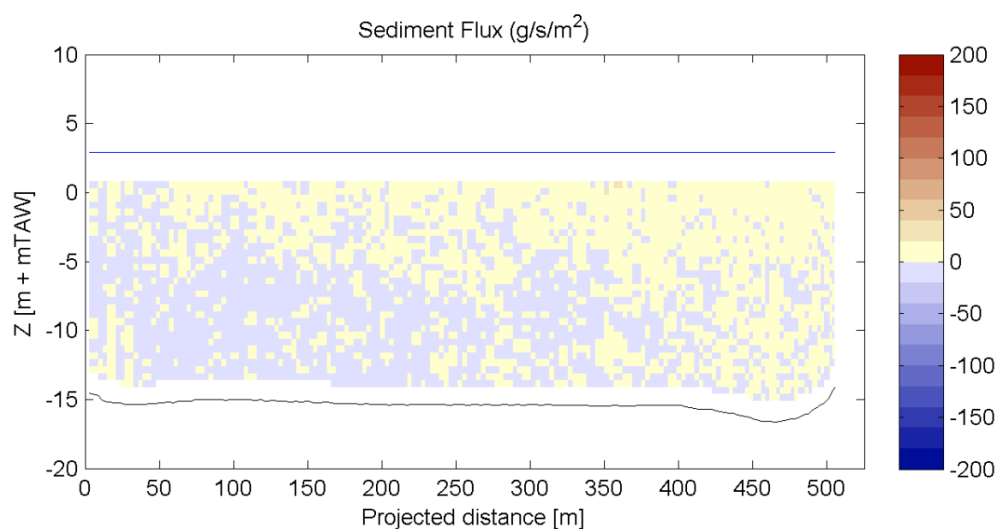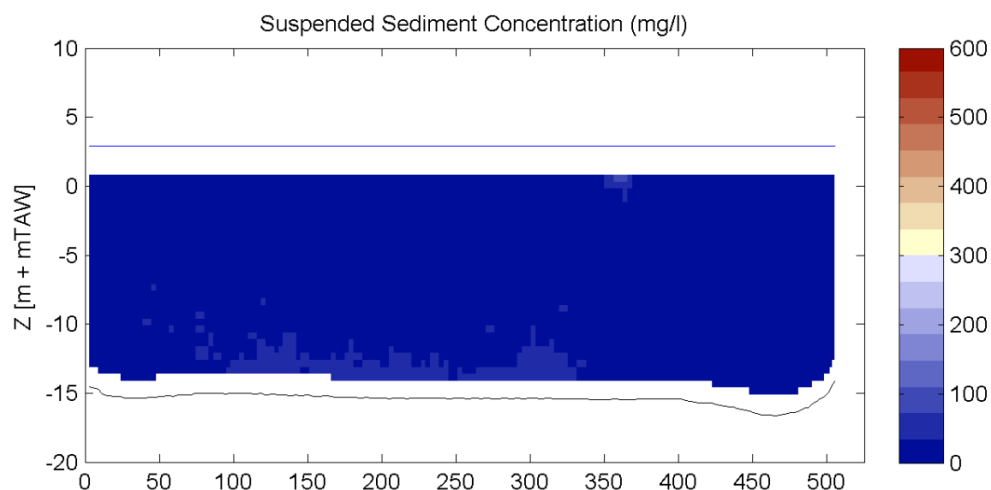

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

14:07 - 14:10

Time after HW [HH:MM]


3:29


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



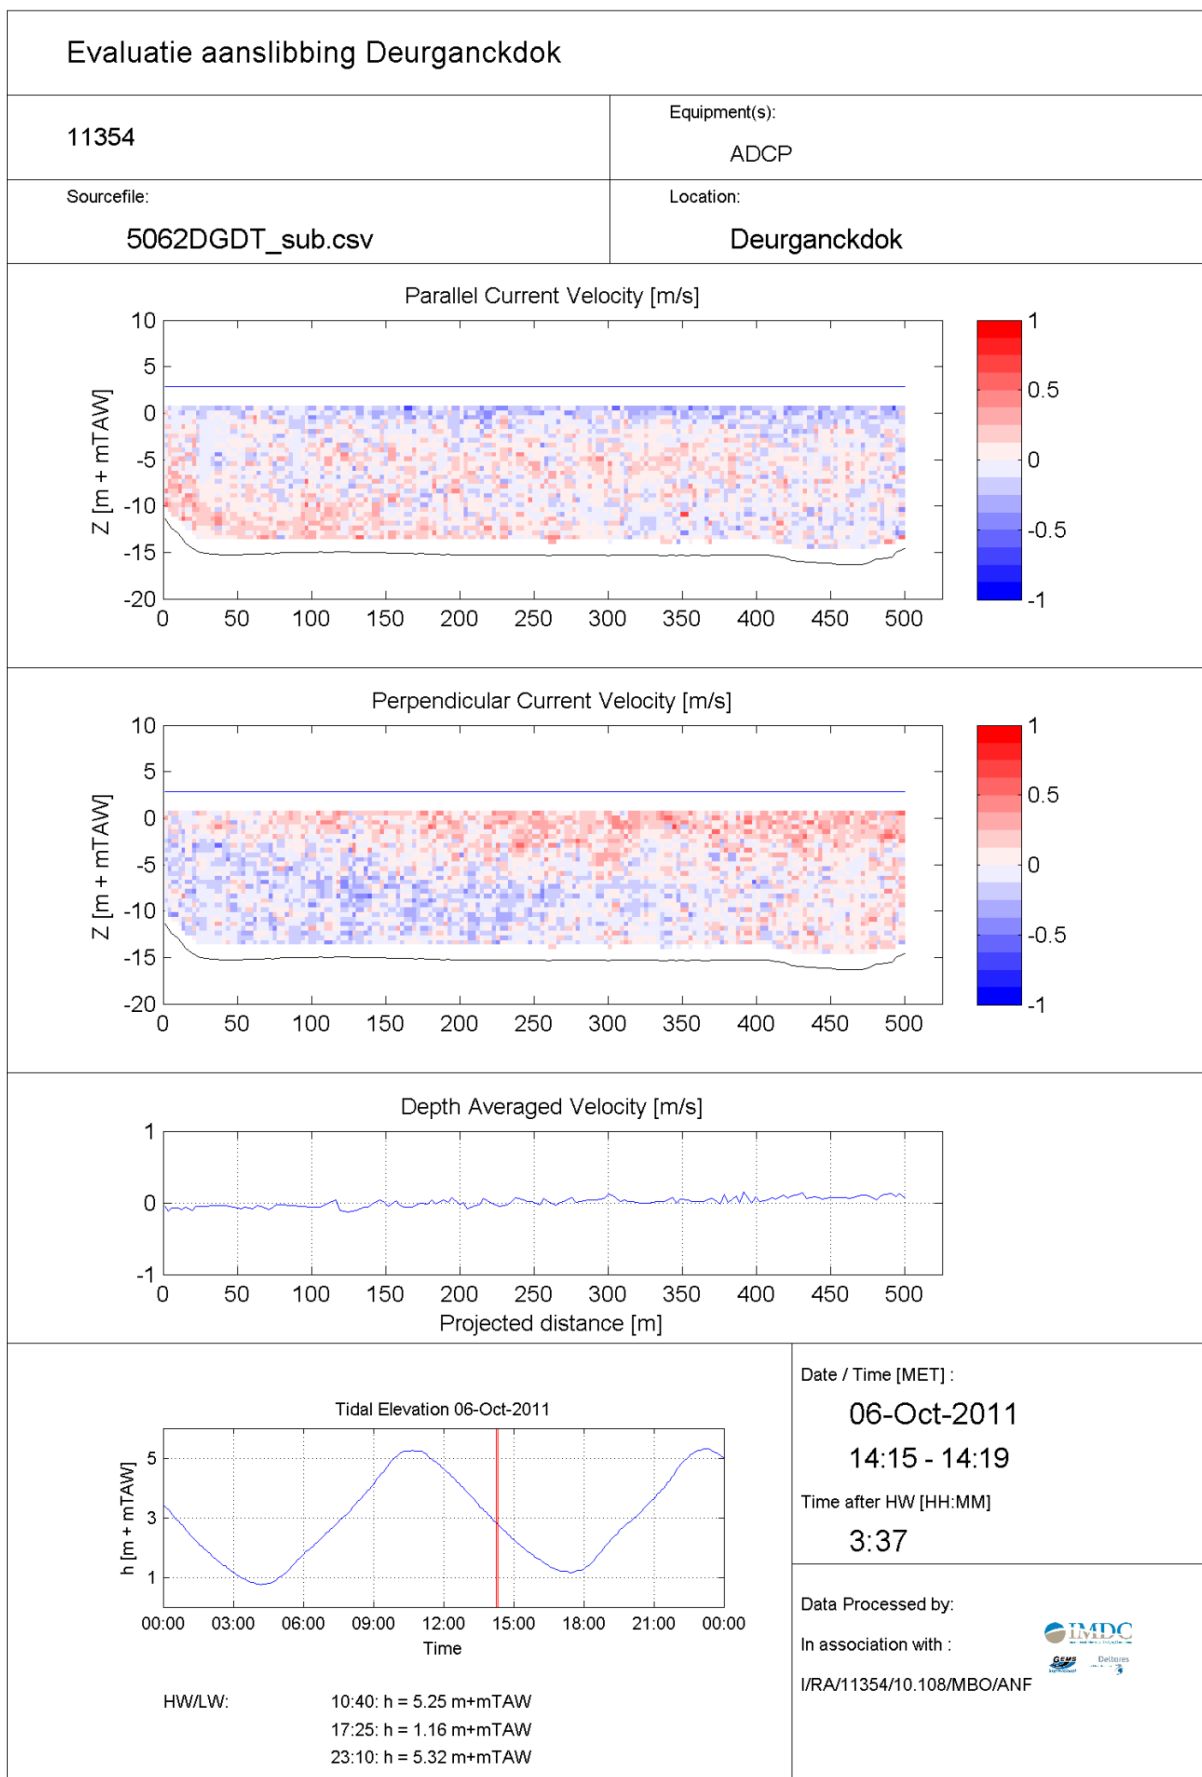

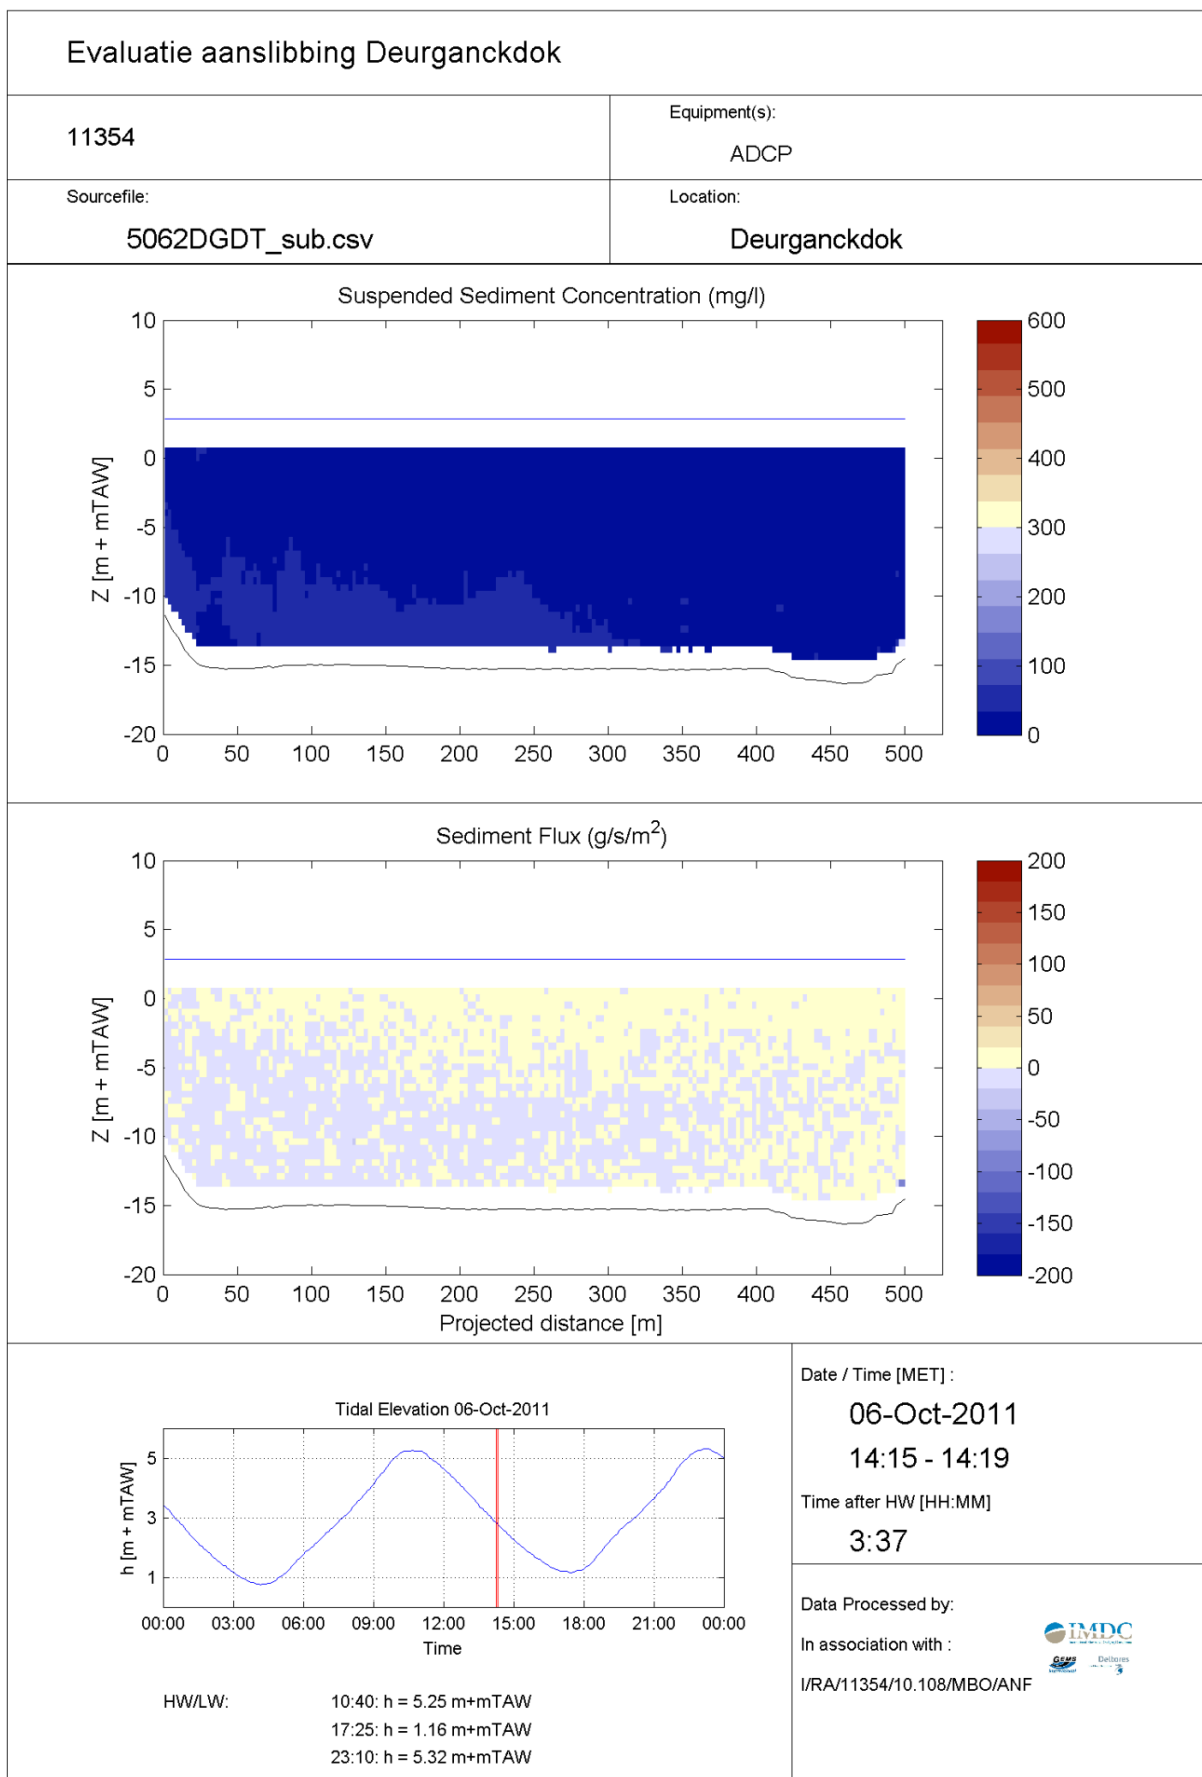

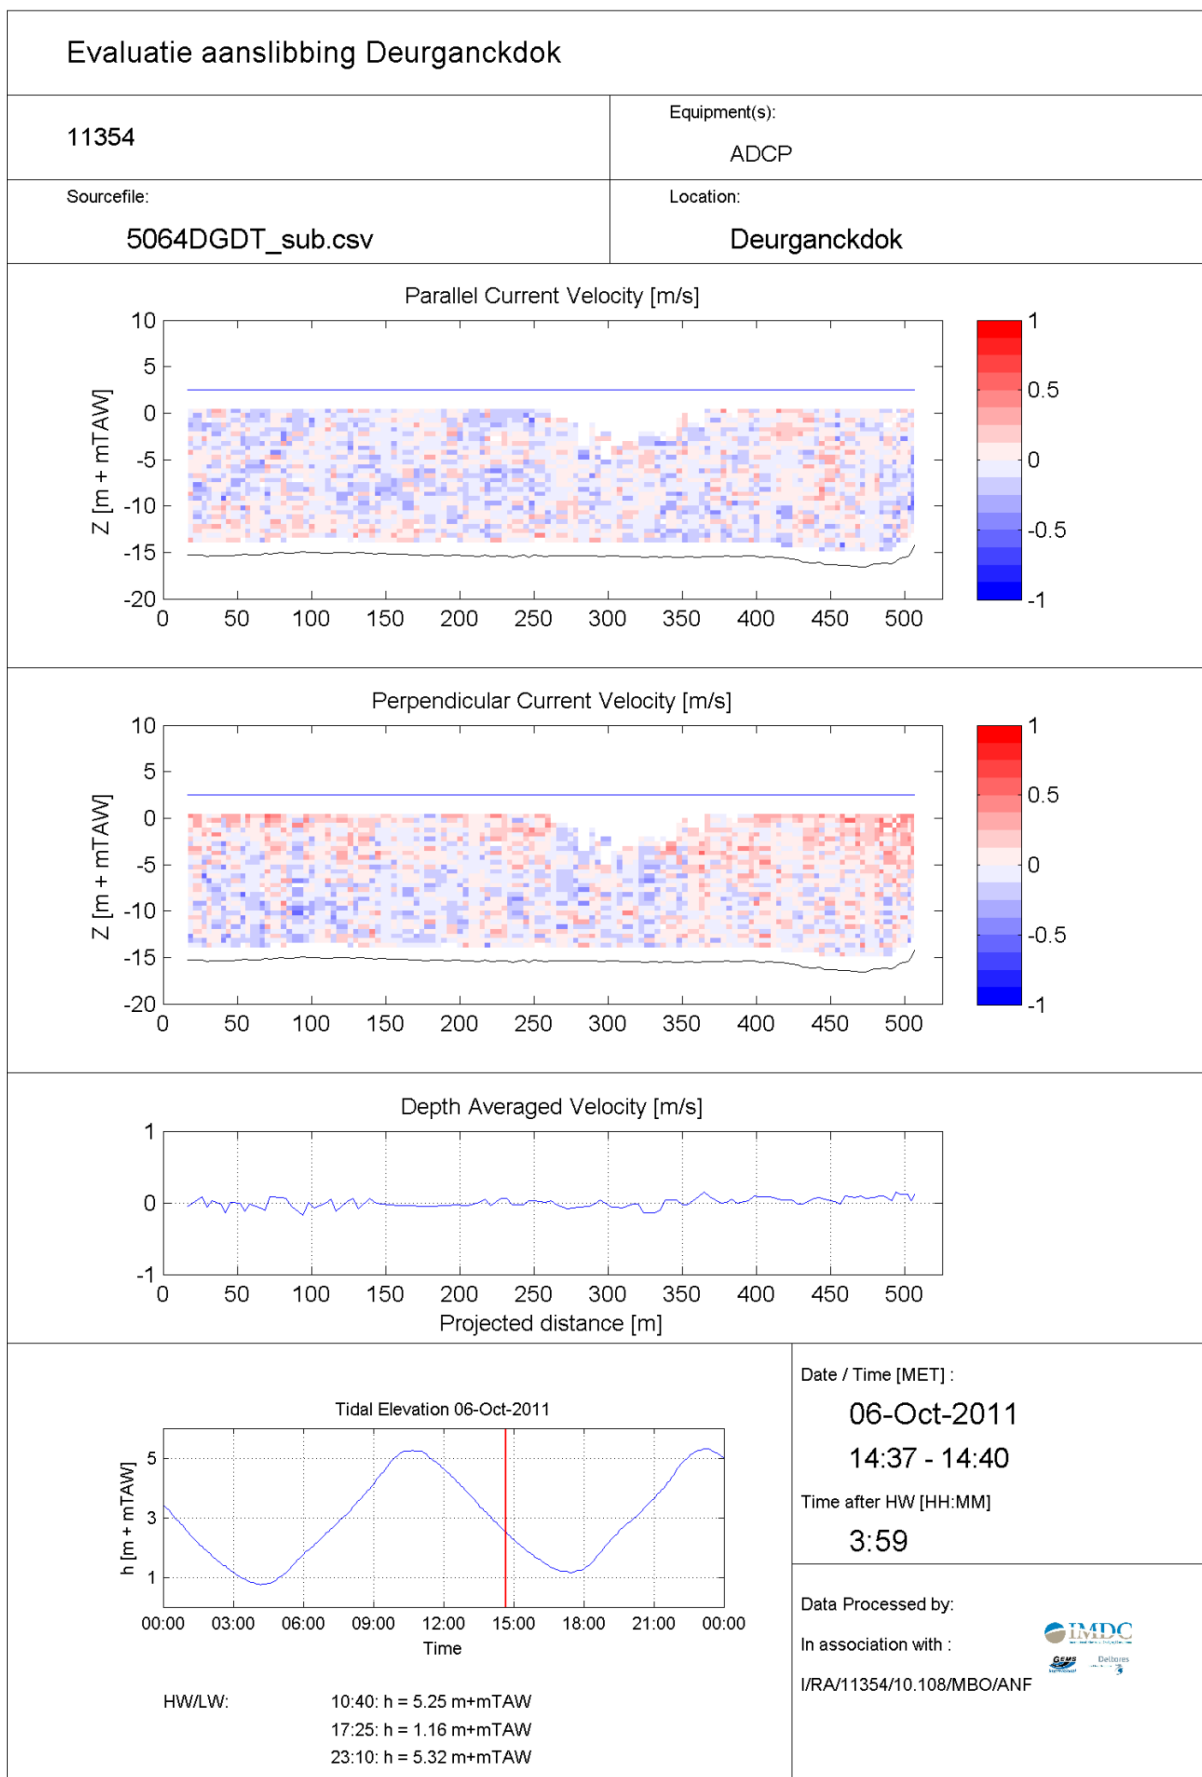

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5064DGDT_sub.csv

Location:

Deurganckdok

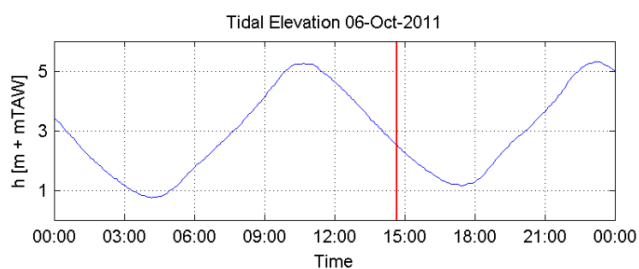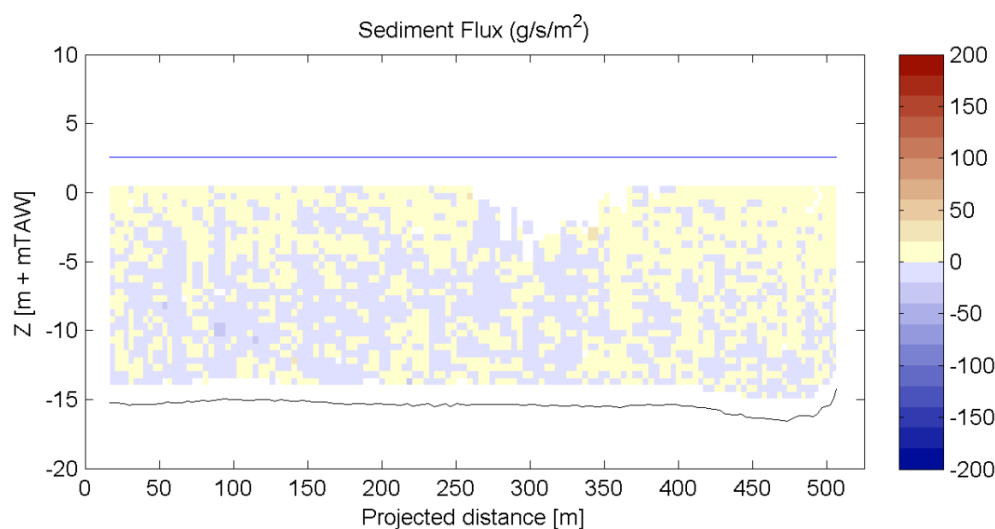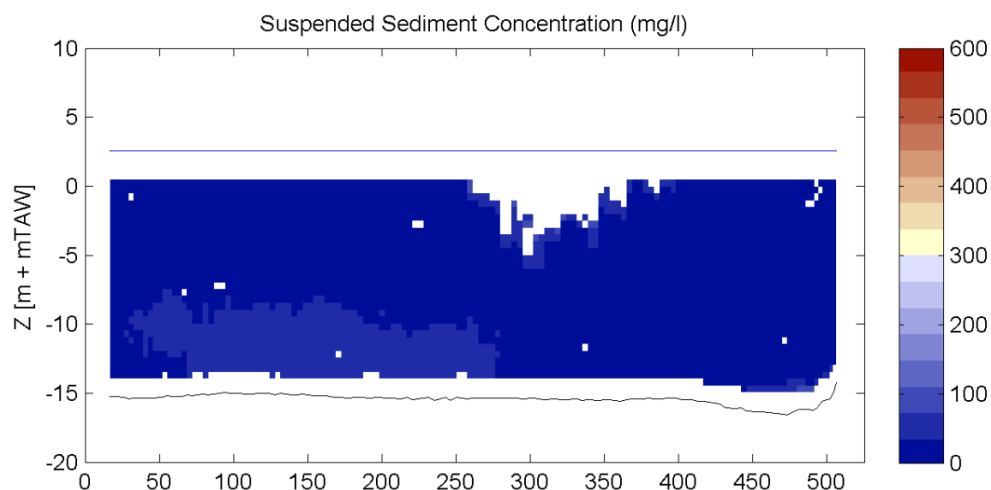

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

14:37 - 14:40

Time after HW [HH:MM]


3:59


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




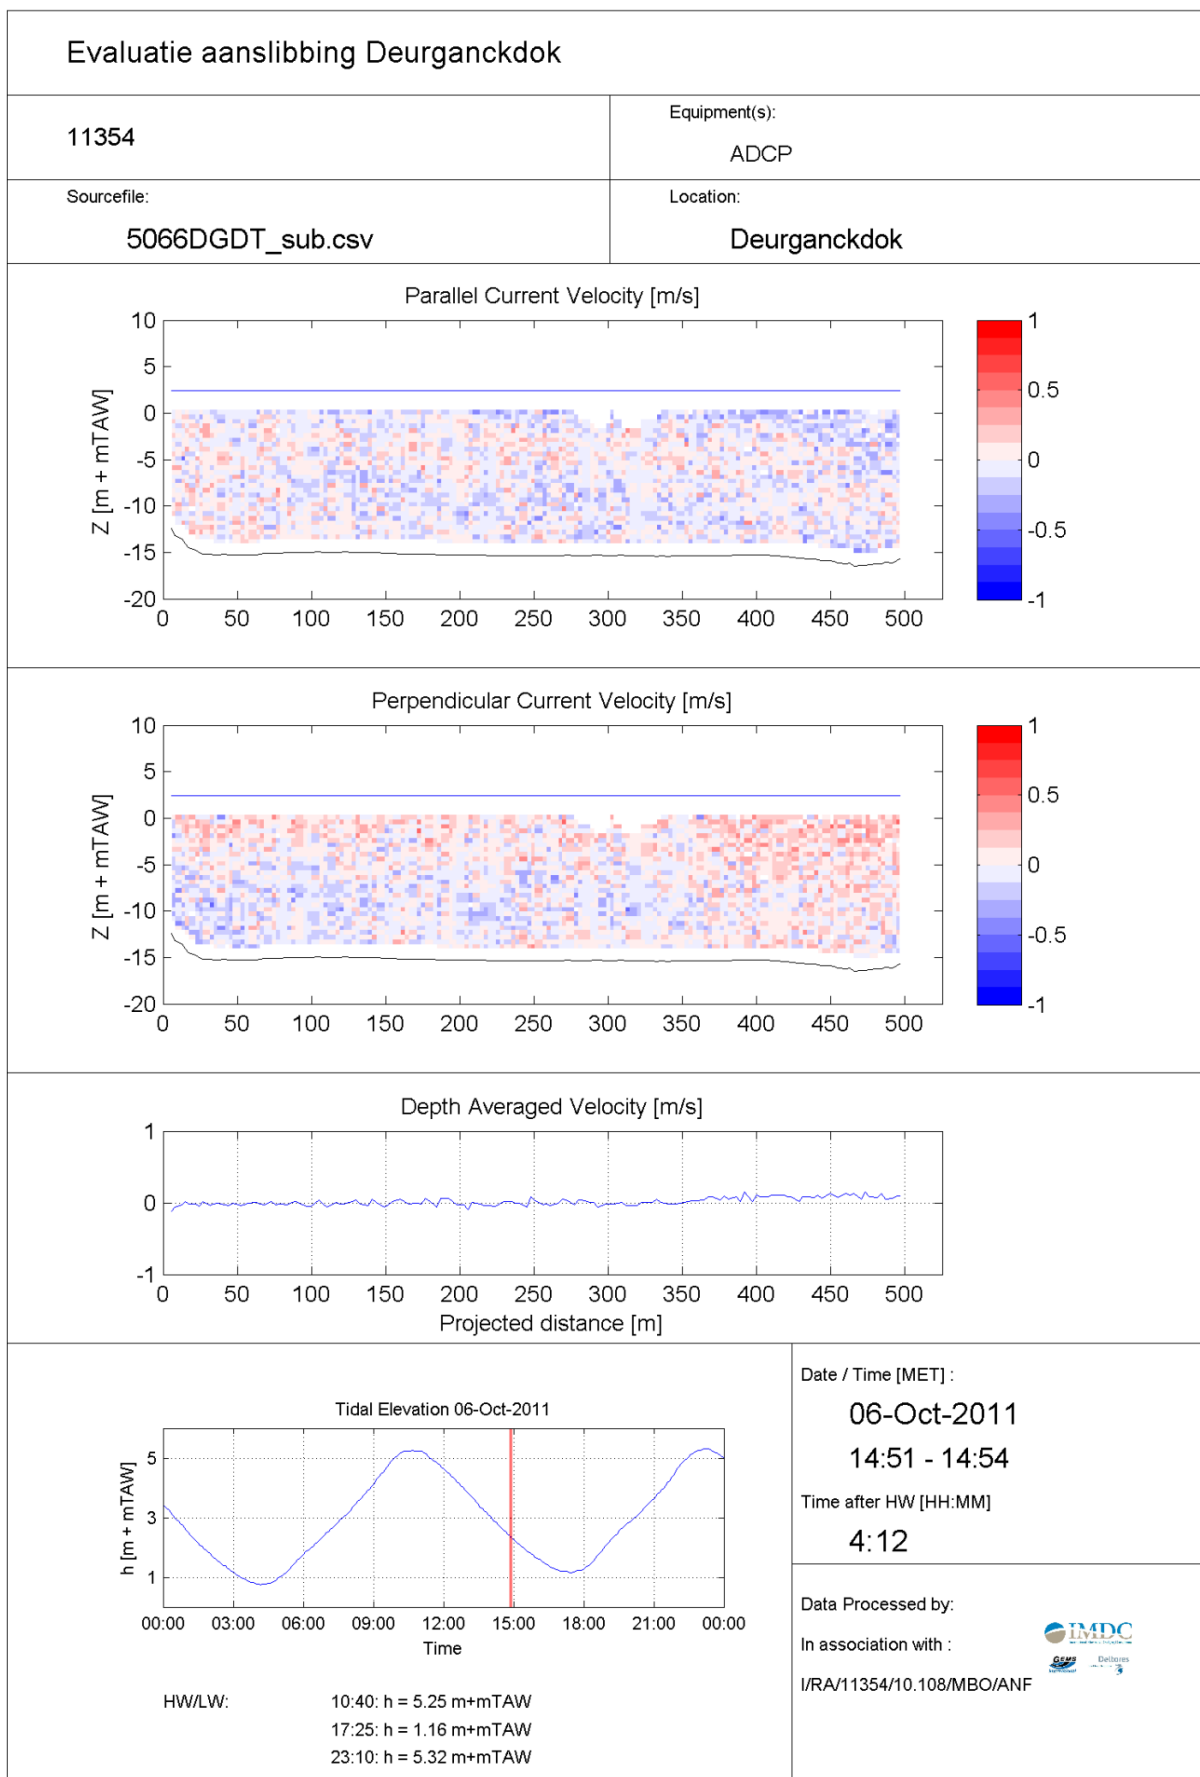

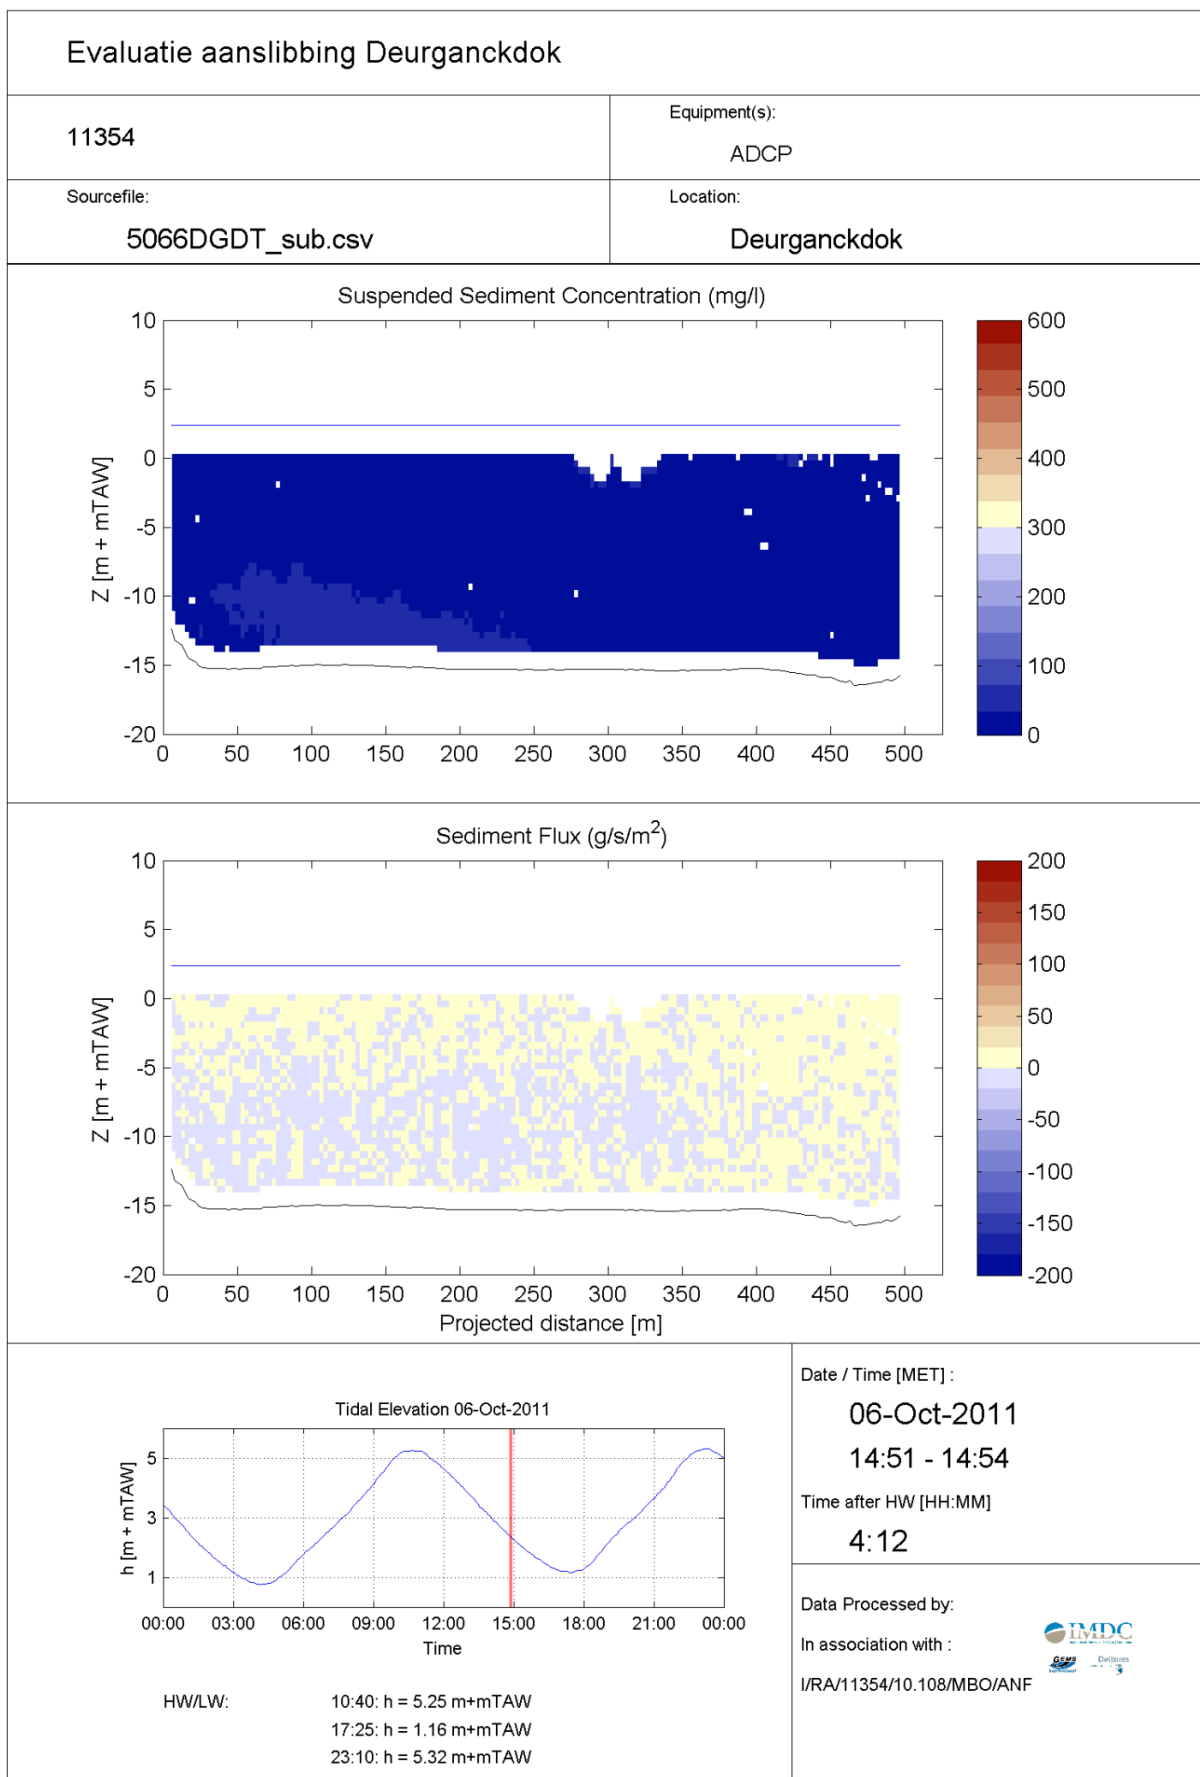

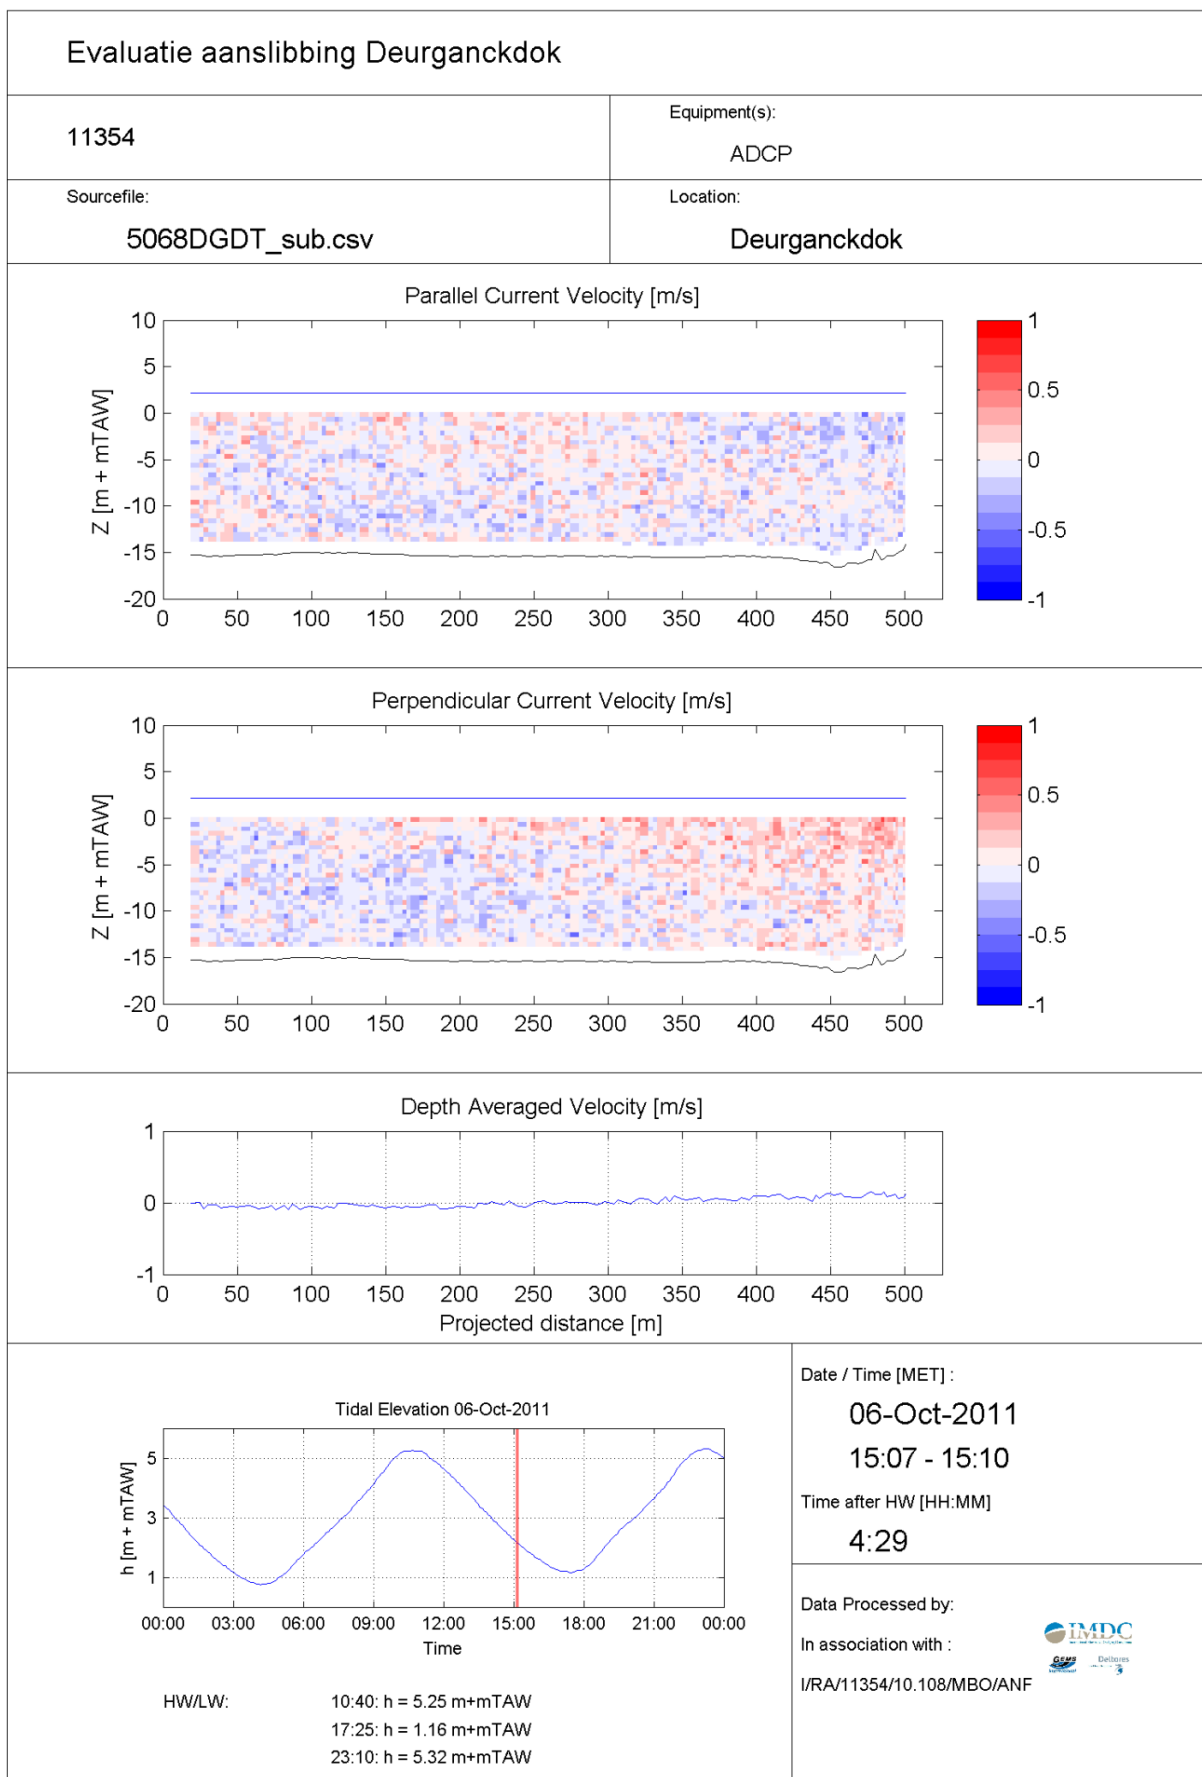

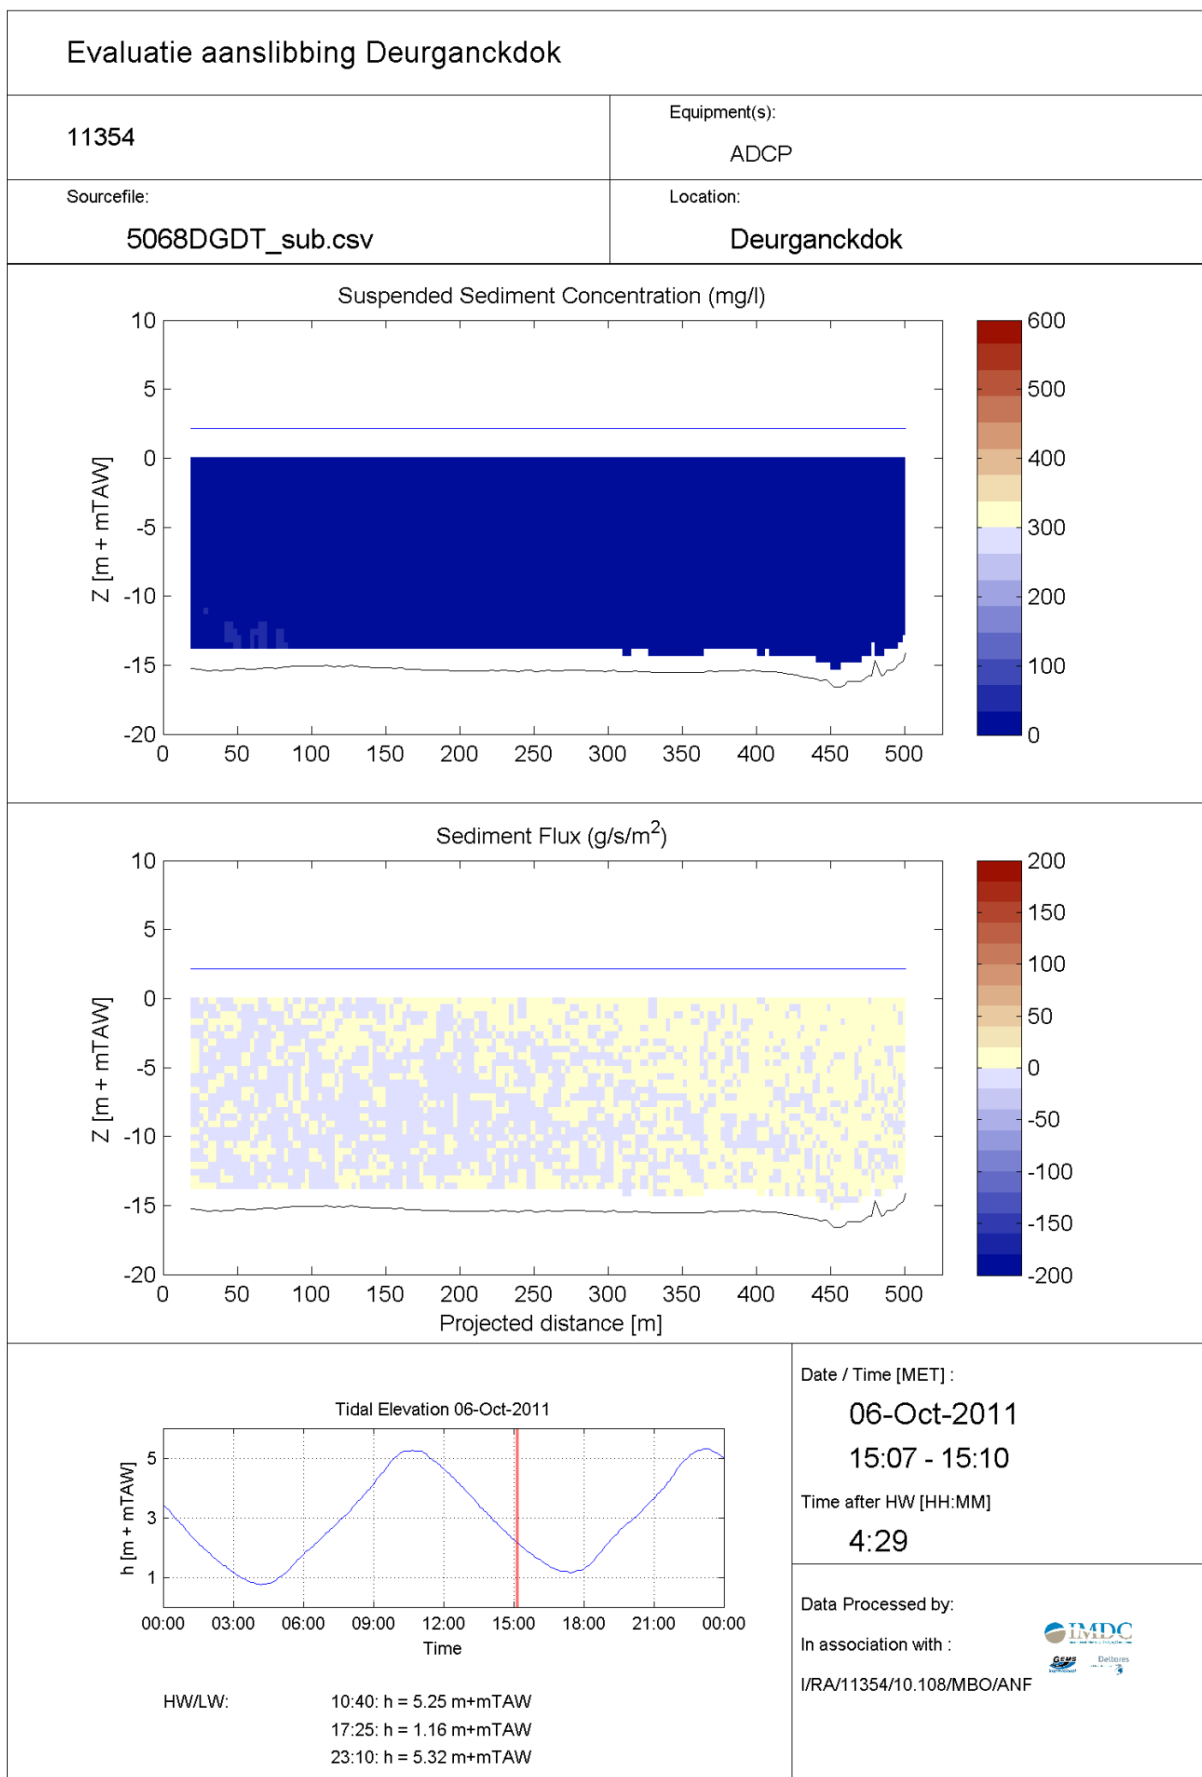

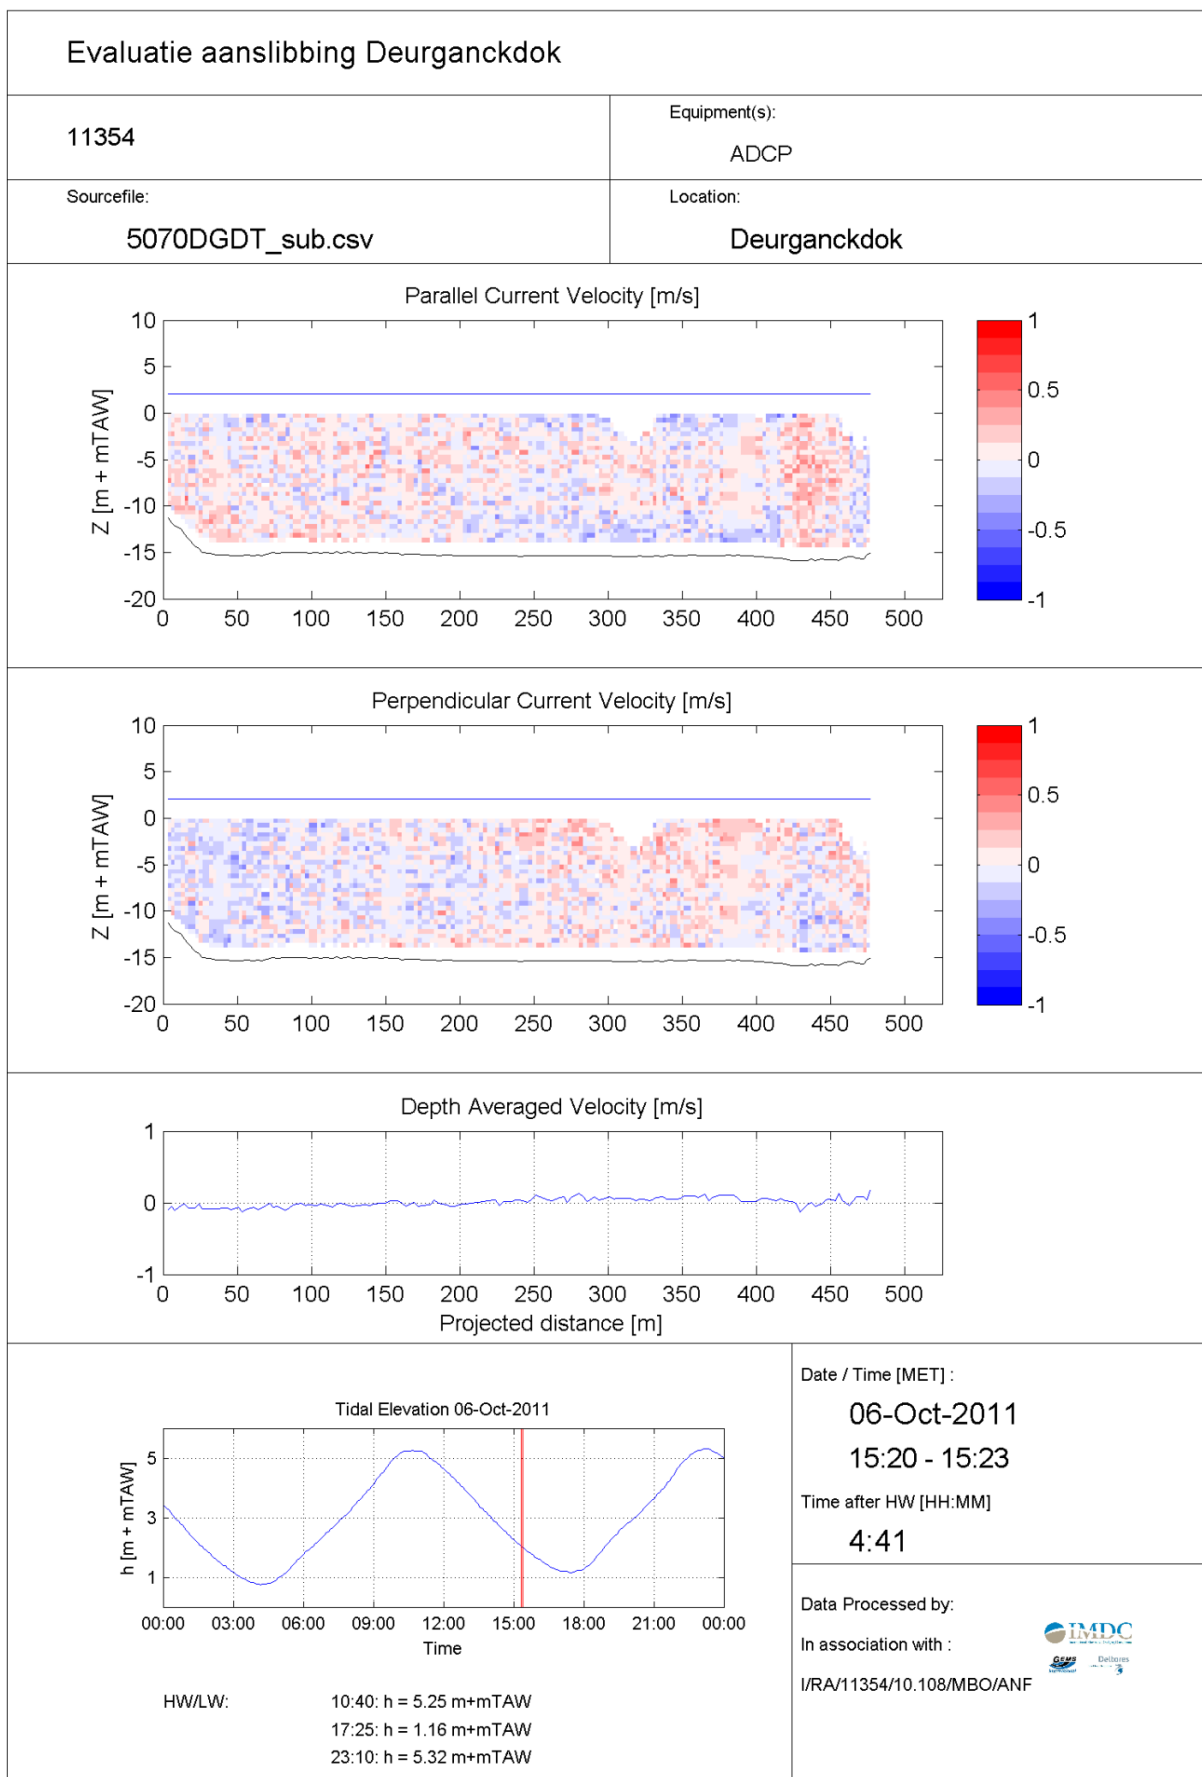

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5070DGDT_sub.csv

Location:

Deurganckdok

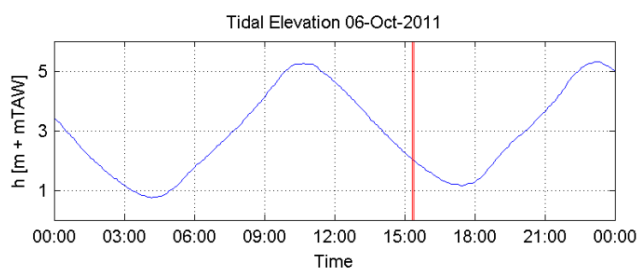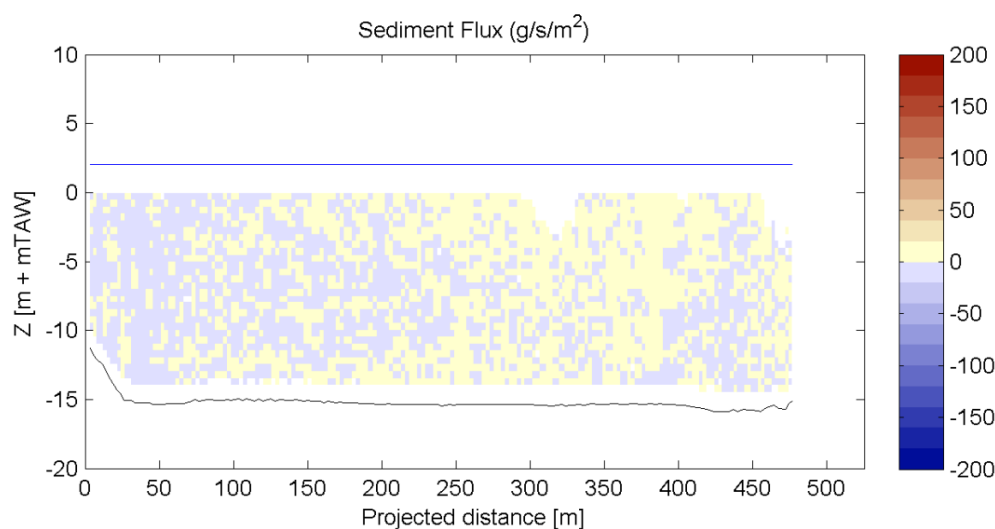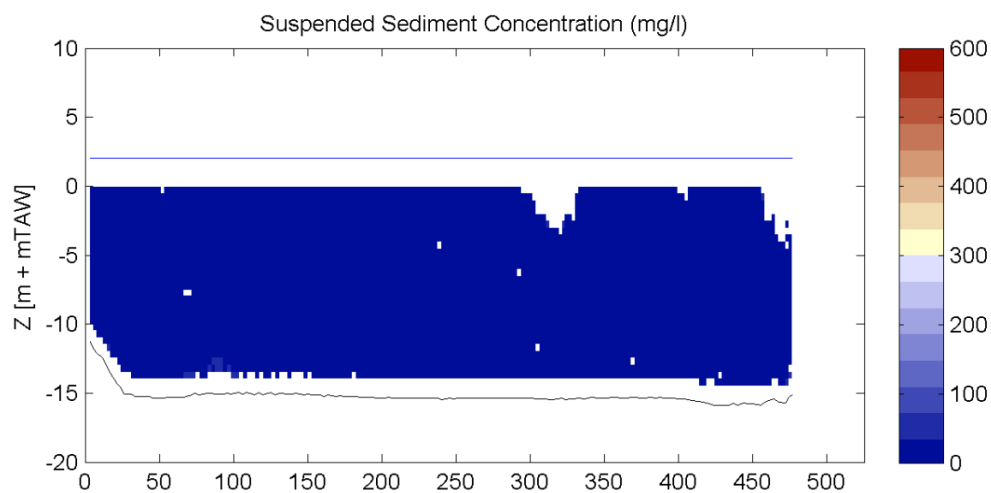

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

15:20 - 15:23

Time after HW [HH:MM]


4:41

Data Processed by:

In association with :

I/RA/11354/10.108/MBO/ANF



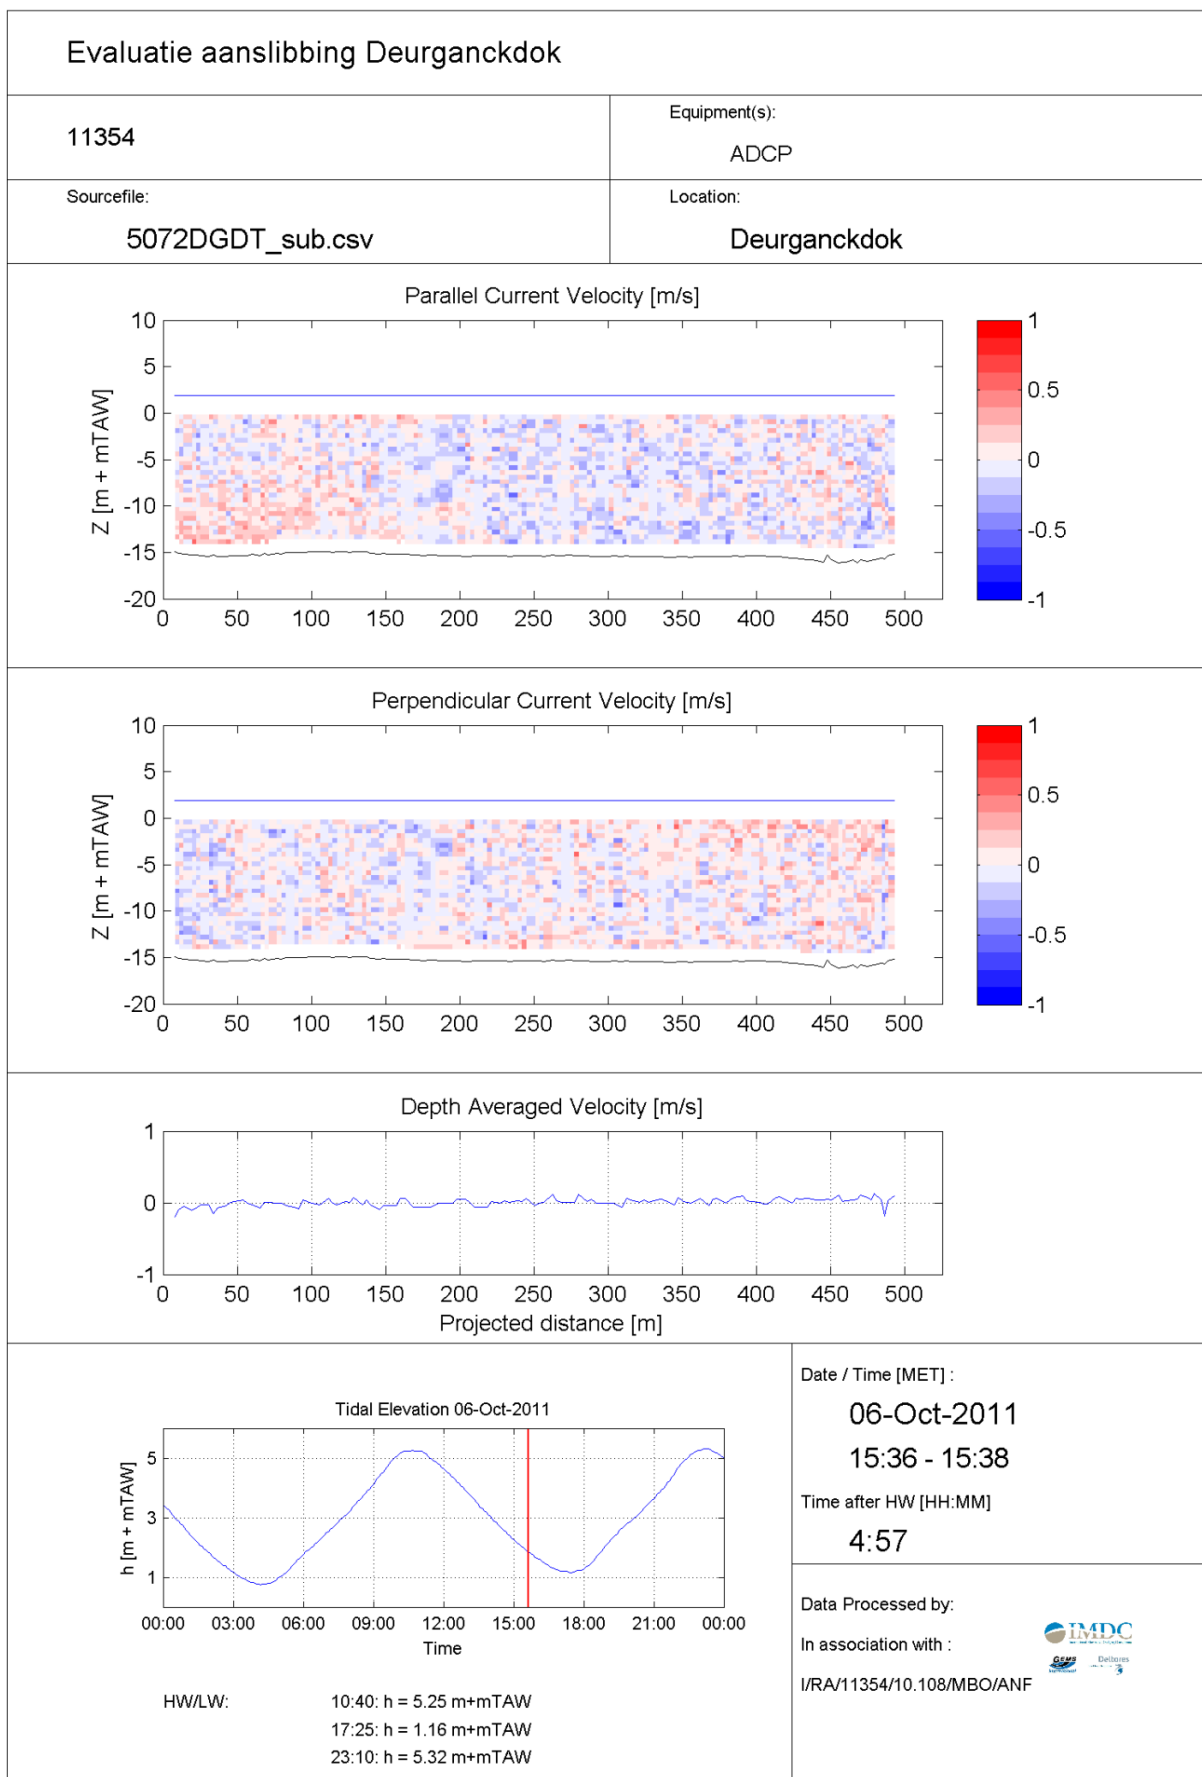

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5072DGDT_sub.csv

Location:

Deurganckdok

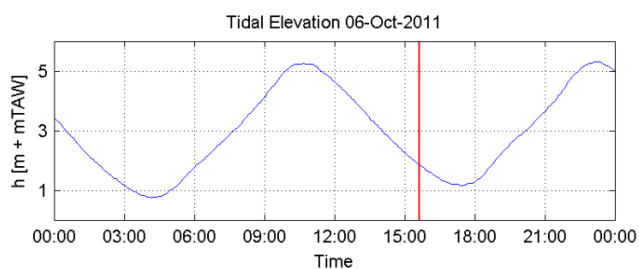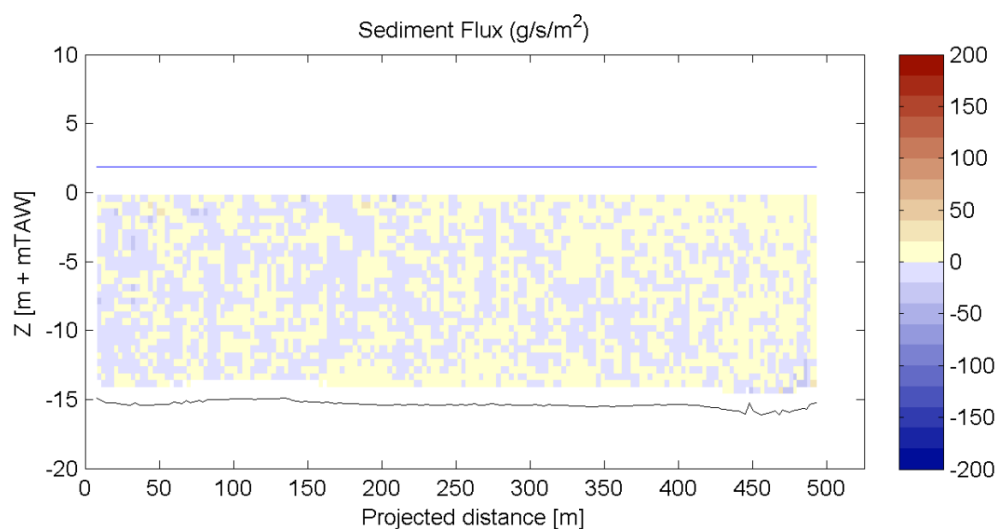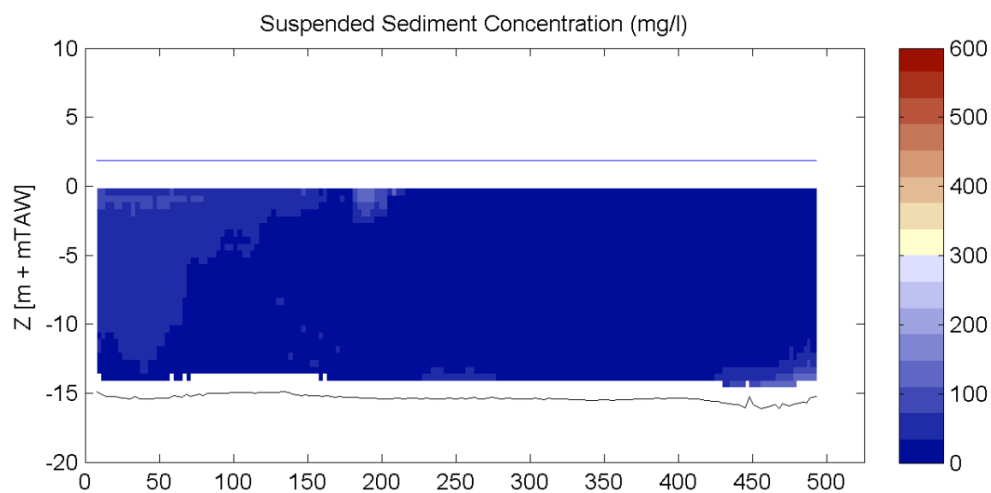

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

15:36 - 15:38

Time after HW [HH:MM]


4:57

Data Processed by:

In association with :

I/RA/11354/10.108/MBO/ANF



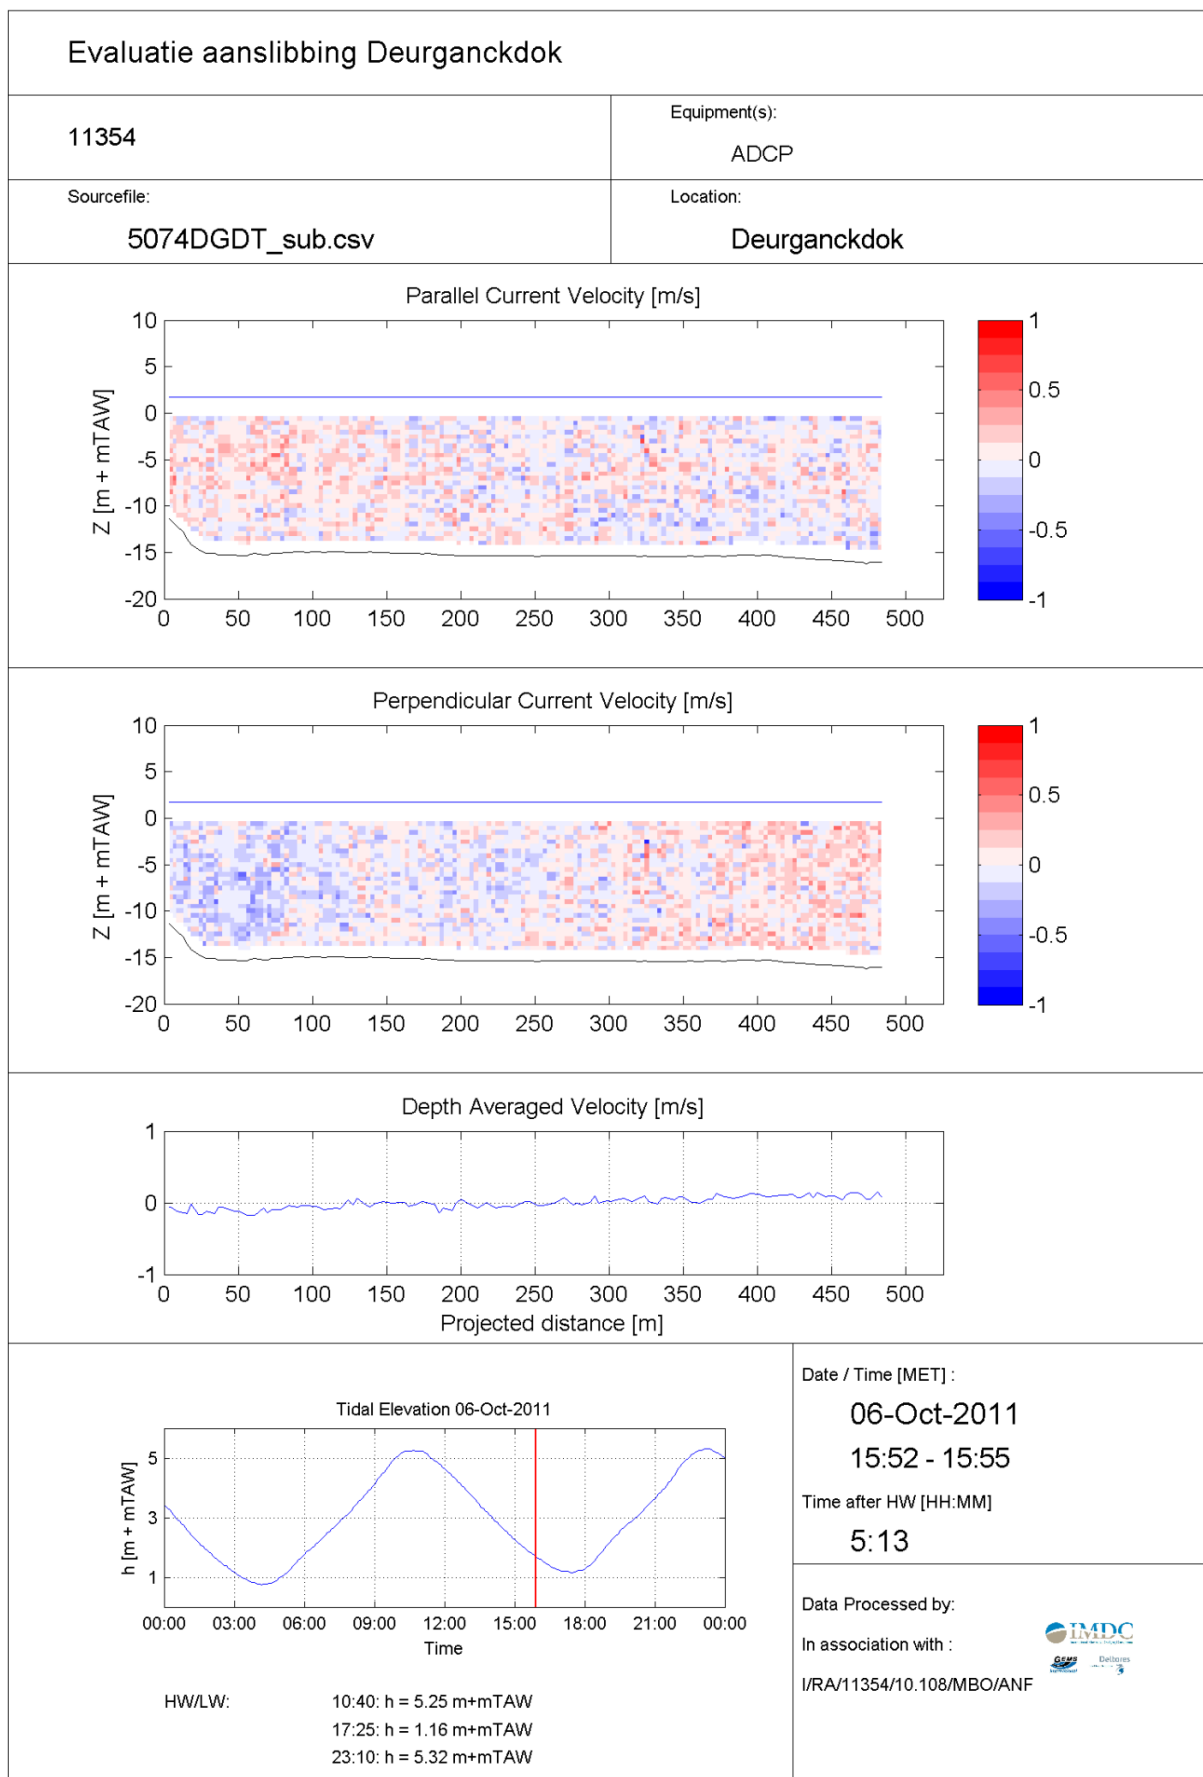

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5074DGDT_sub.csv

Location:

Deurganckdok

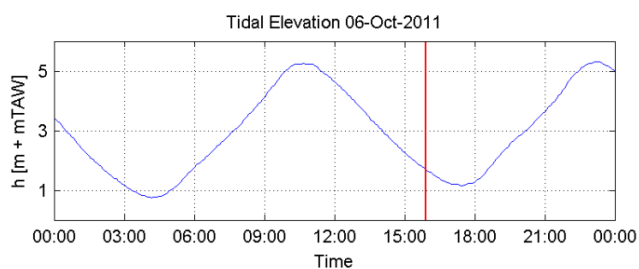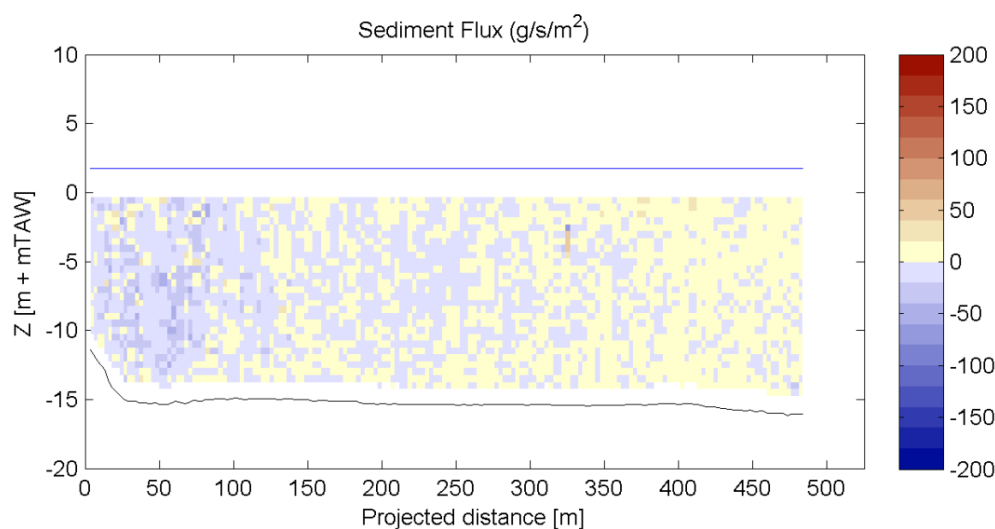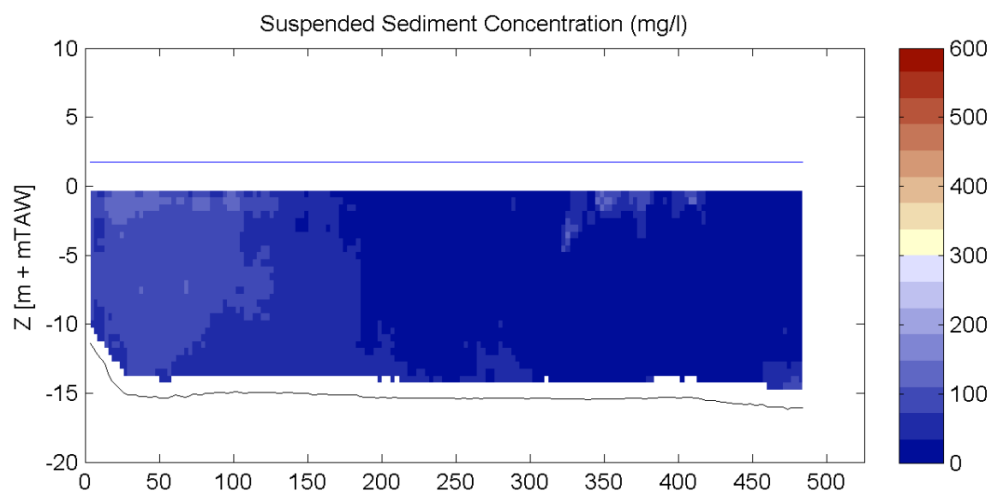

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

15:52 - 15:55

Time after HW [HH:MM]


5:13

Data Processed by:

In association with :

I/RA/11354/10.108/MBO/ANF



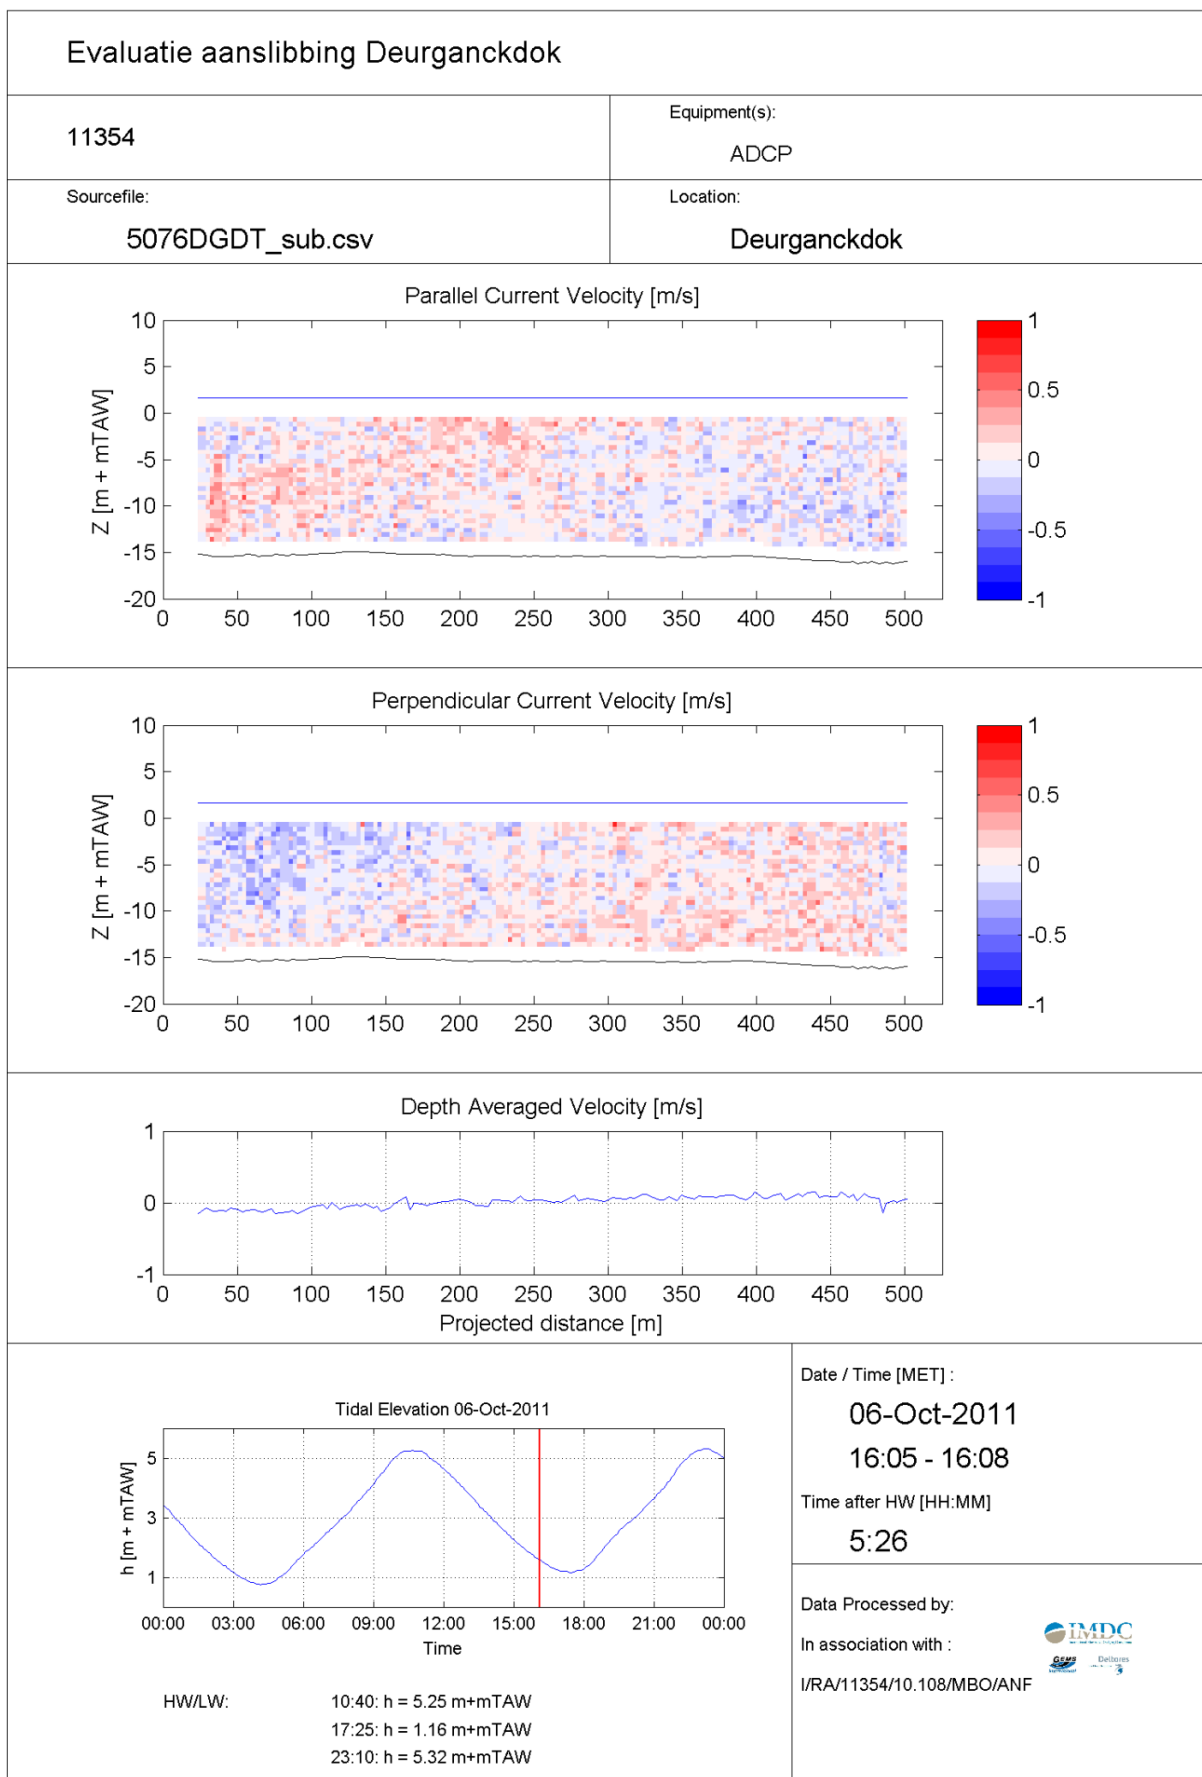

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5076DGDT_sub.csv

Location:

Deurganckdok

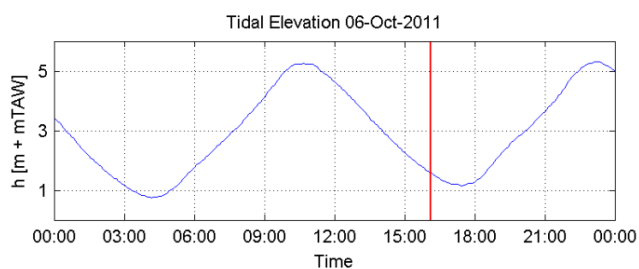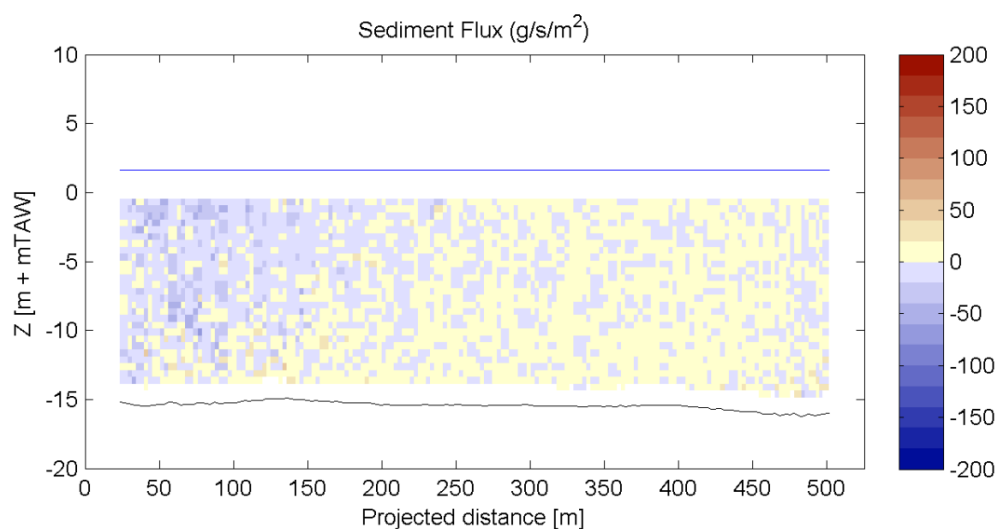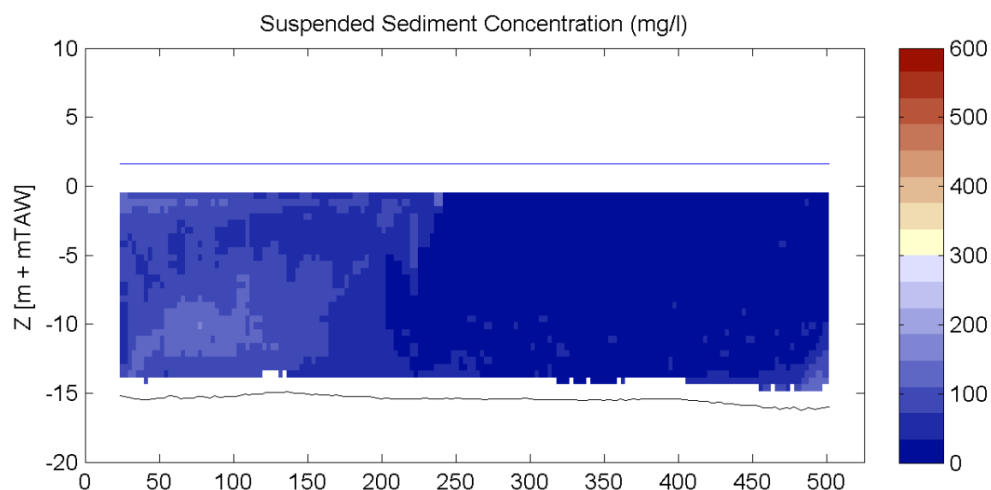

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

16:05 - 16:08

Time after HW [HH:MM]


5:26


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



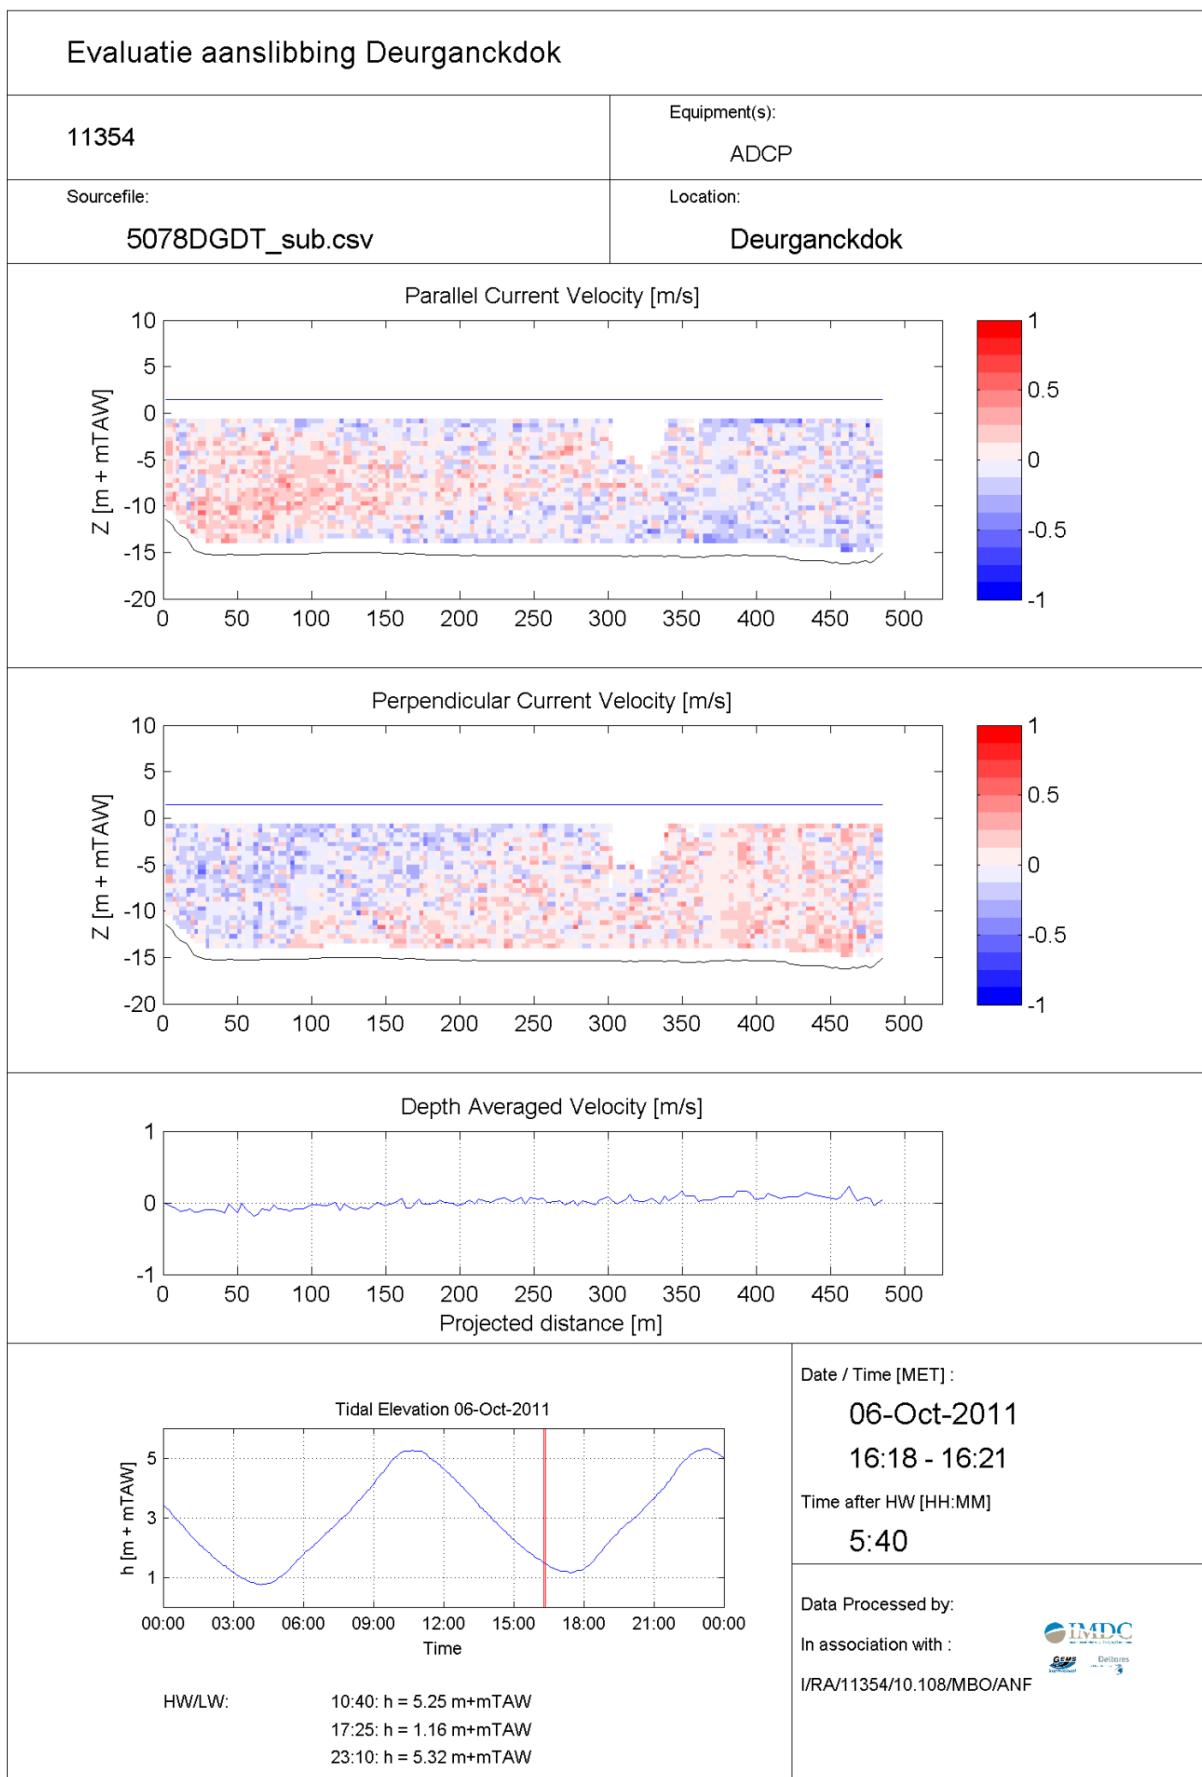

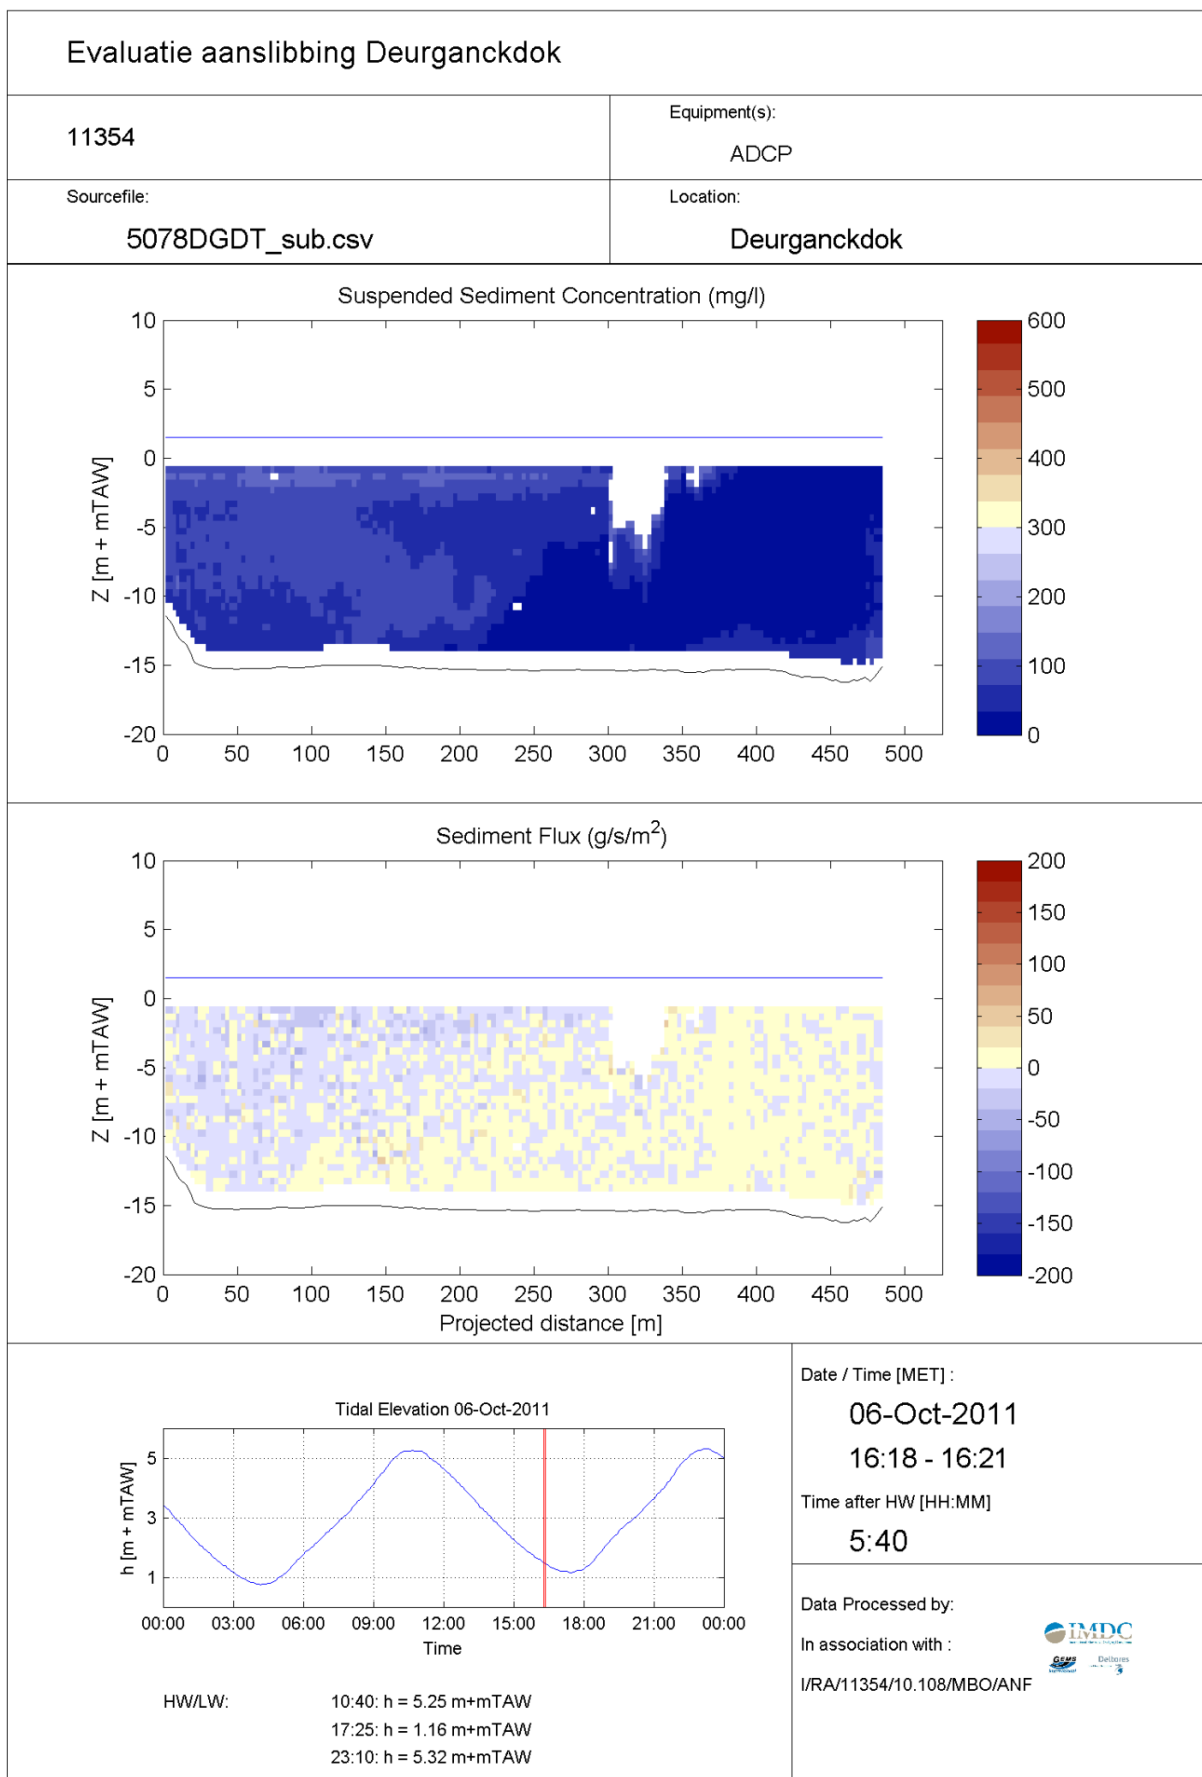

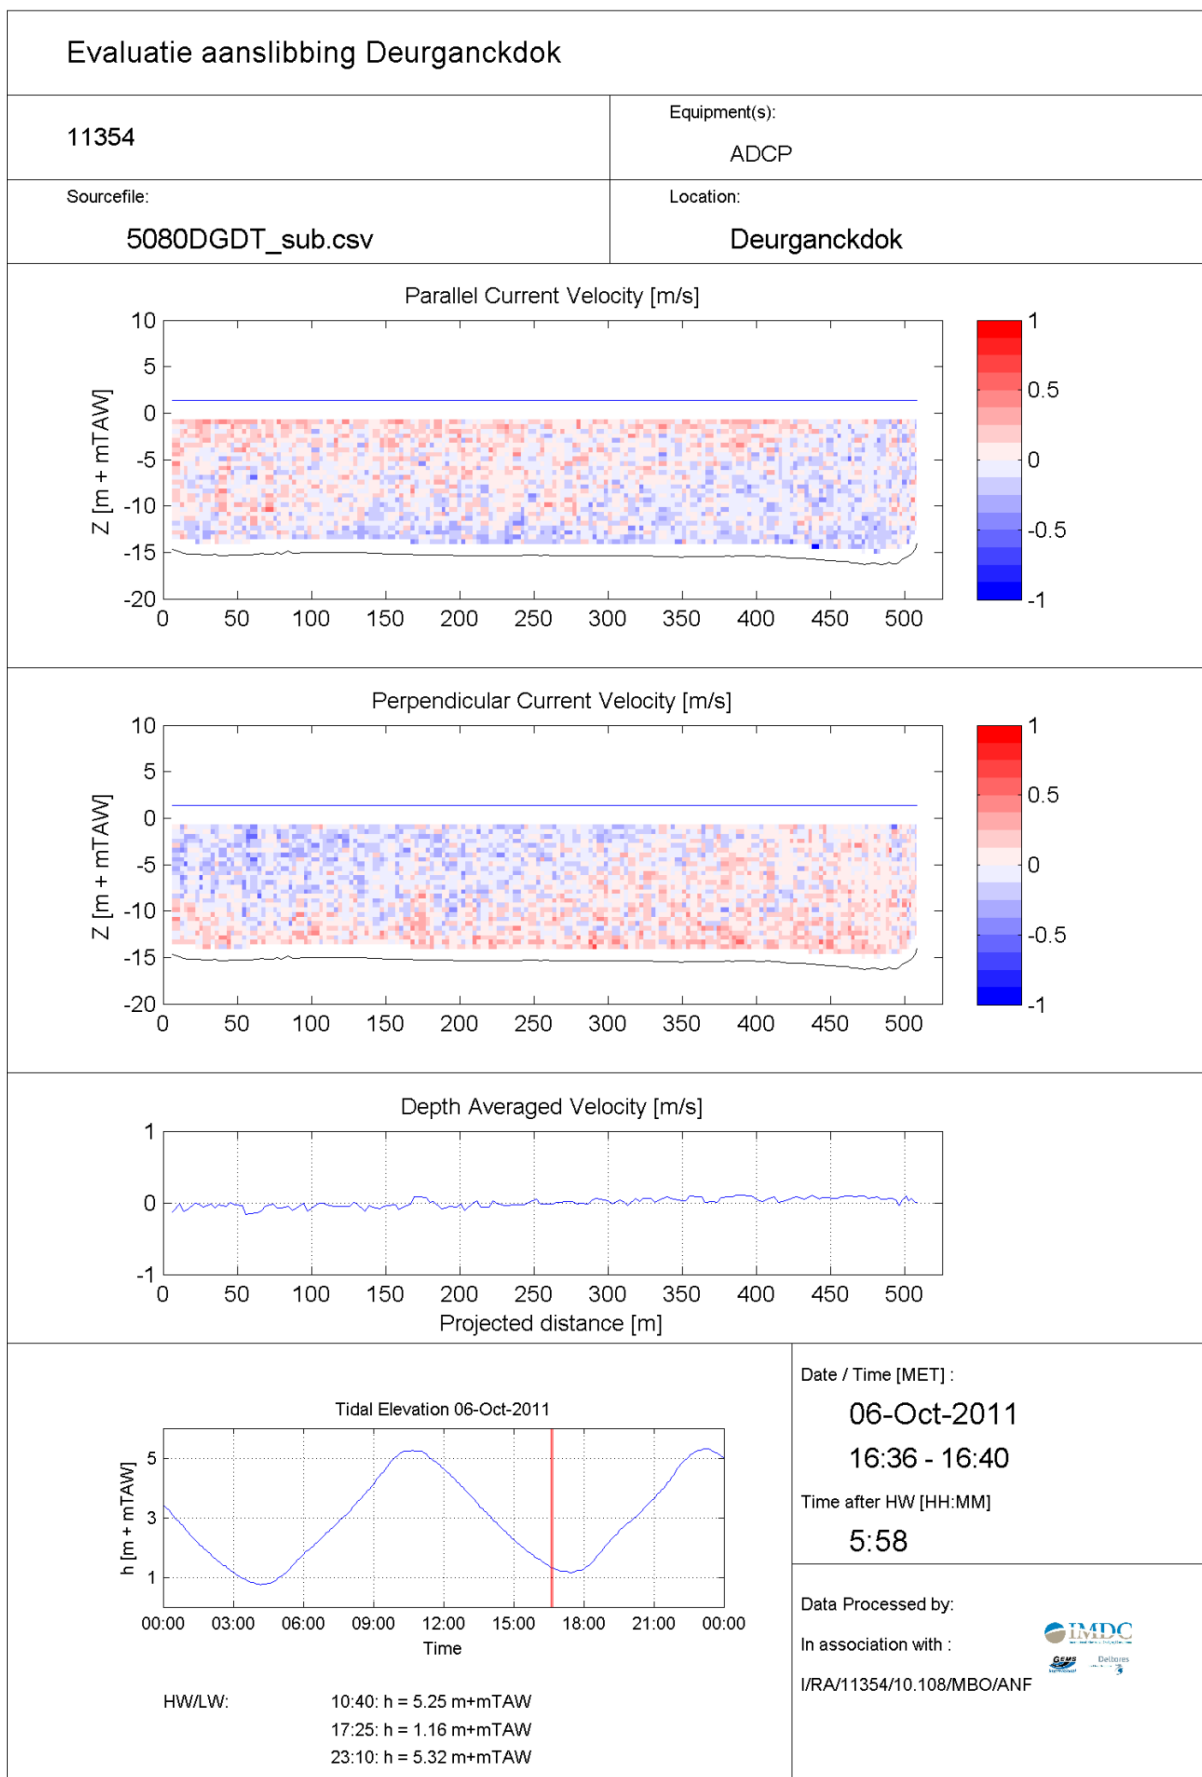

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5080DGMT_sub.csv

Location:

Deurganckdok

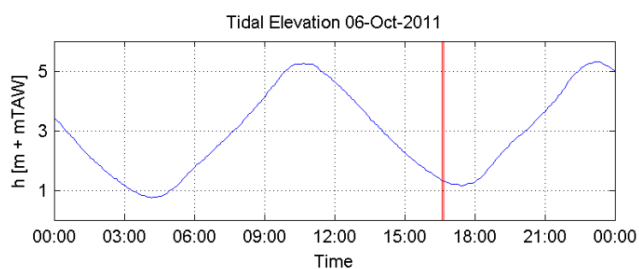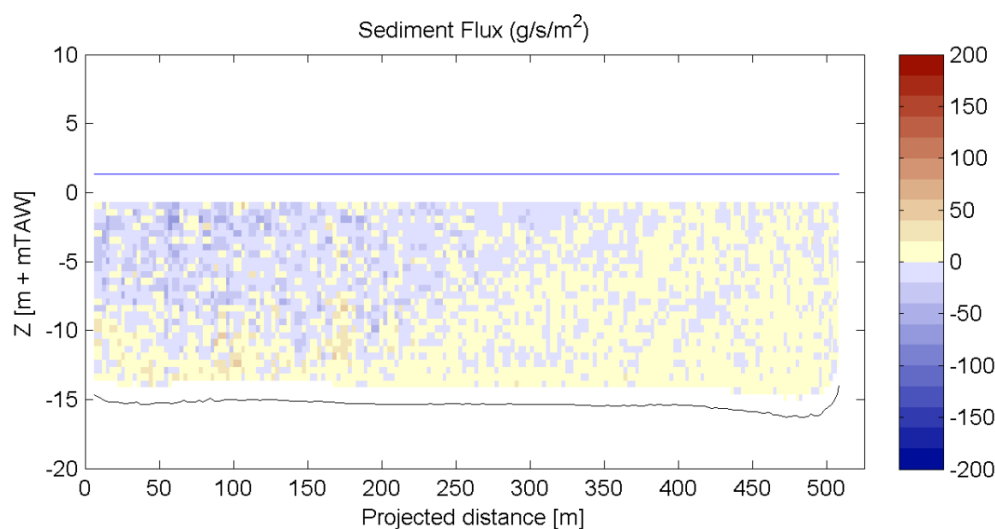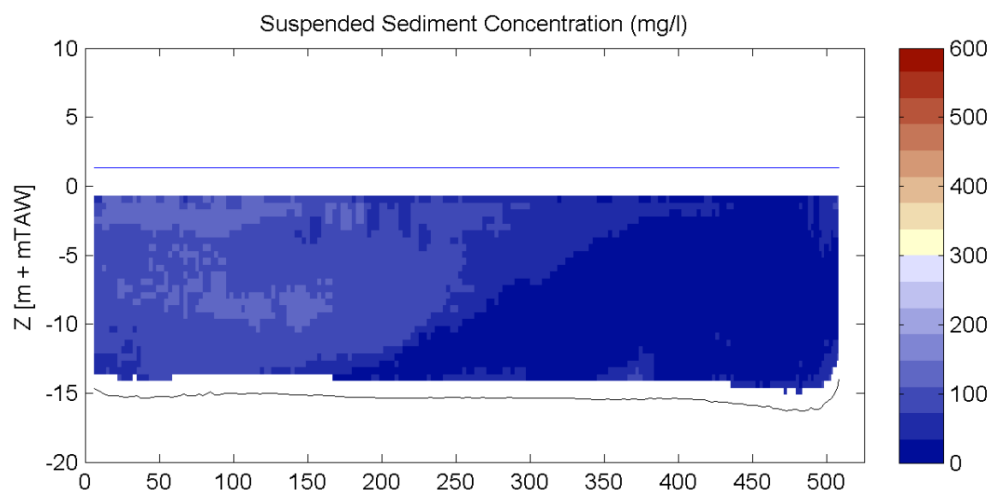

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

16:36 - 16:40

Time after HW [HH:MM]


5:58


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



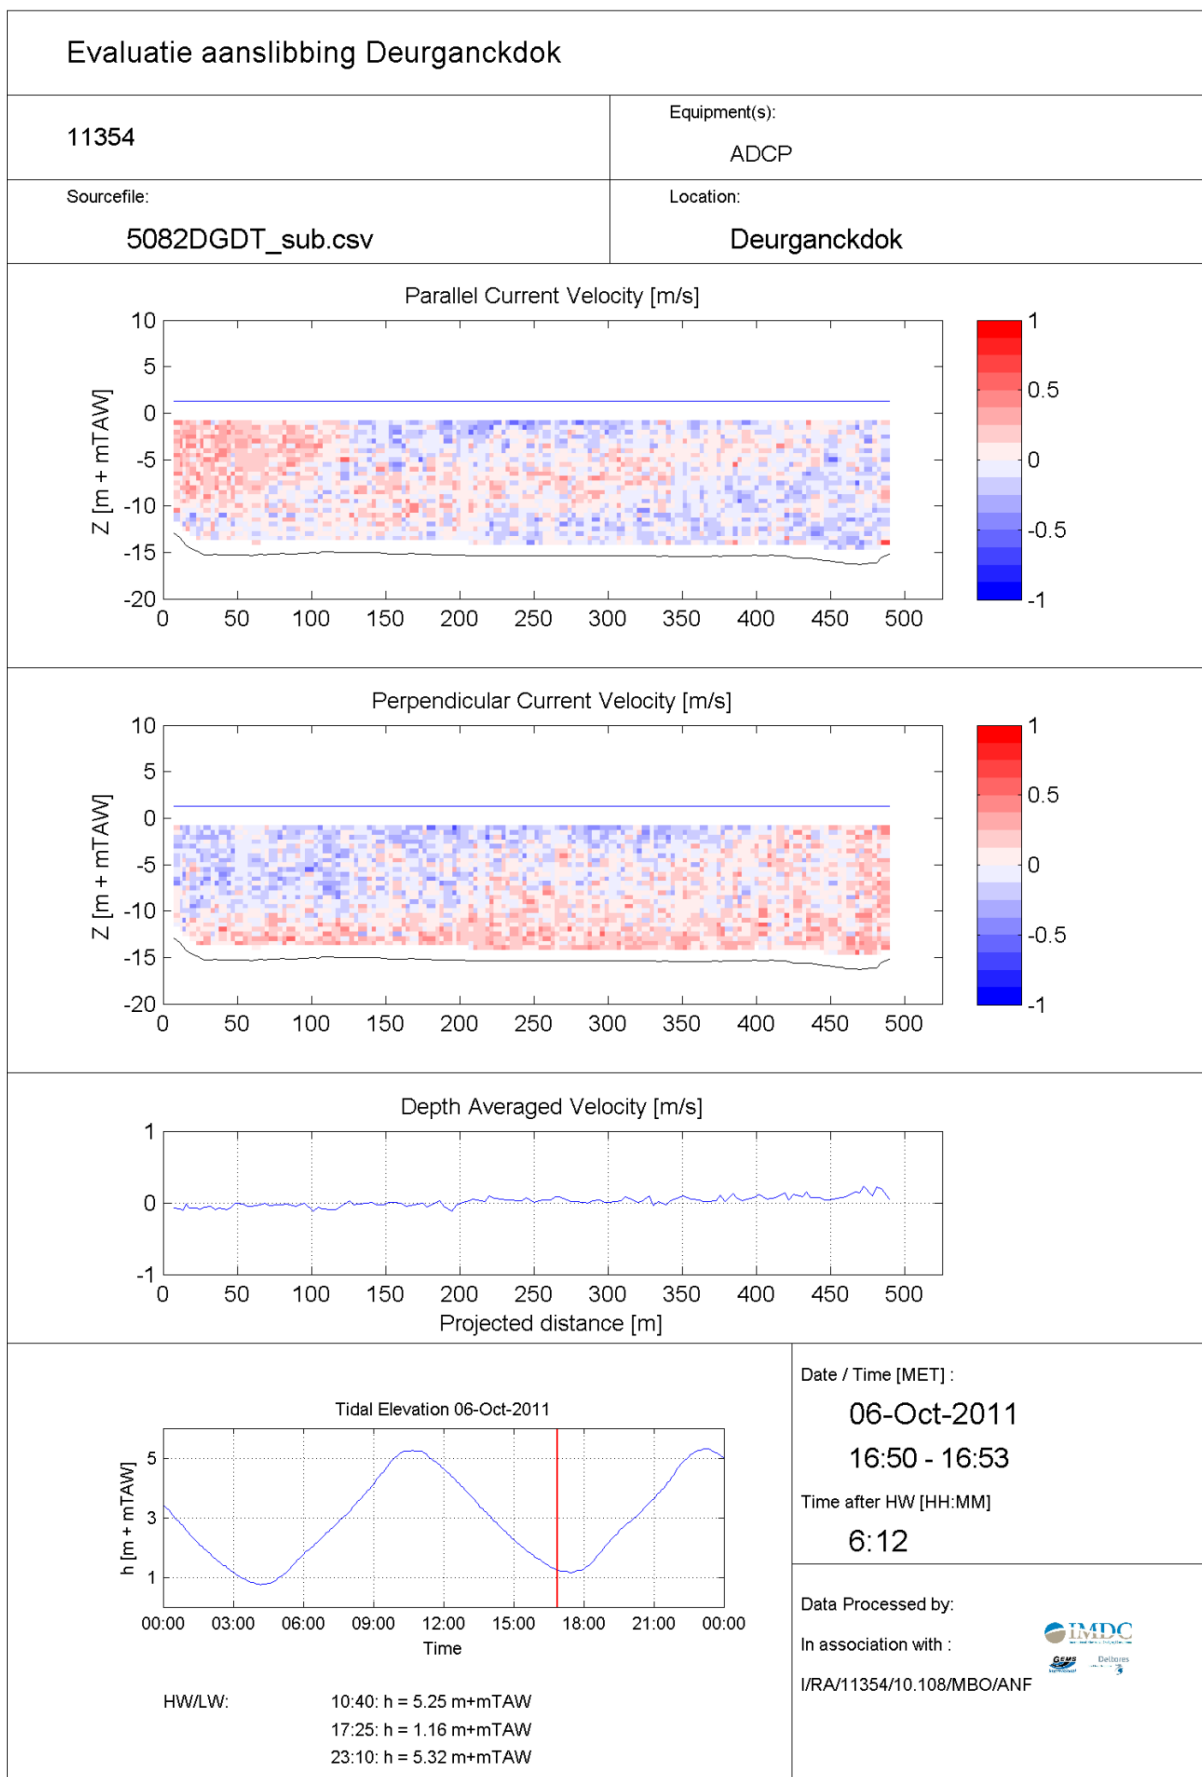

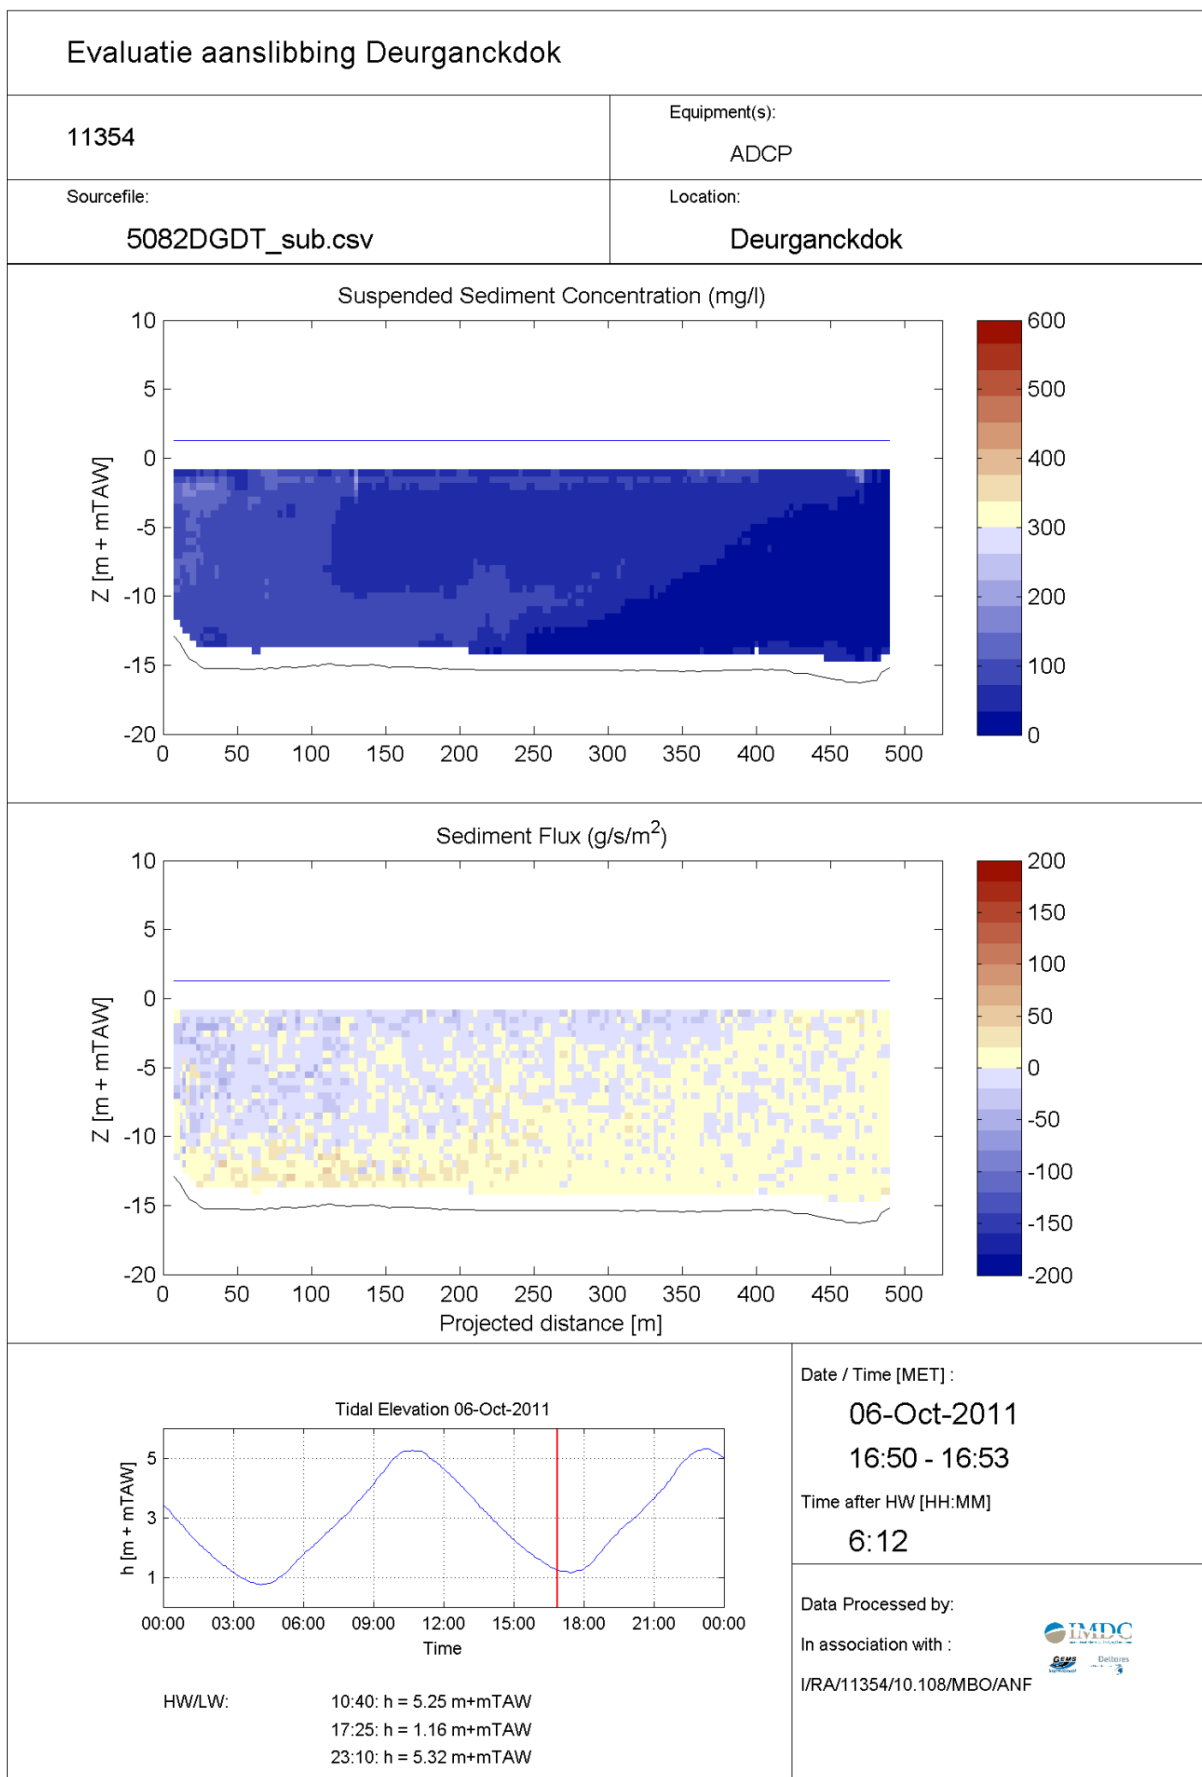

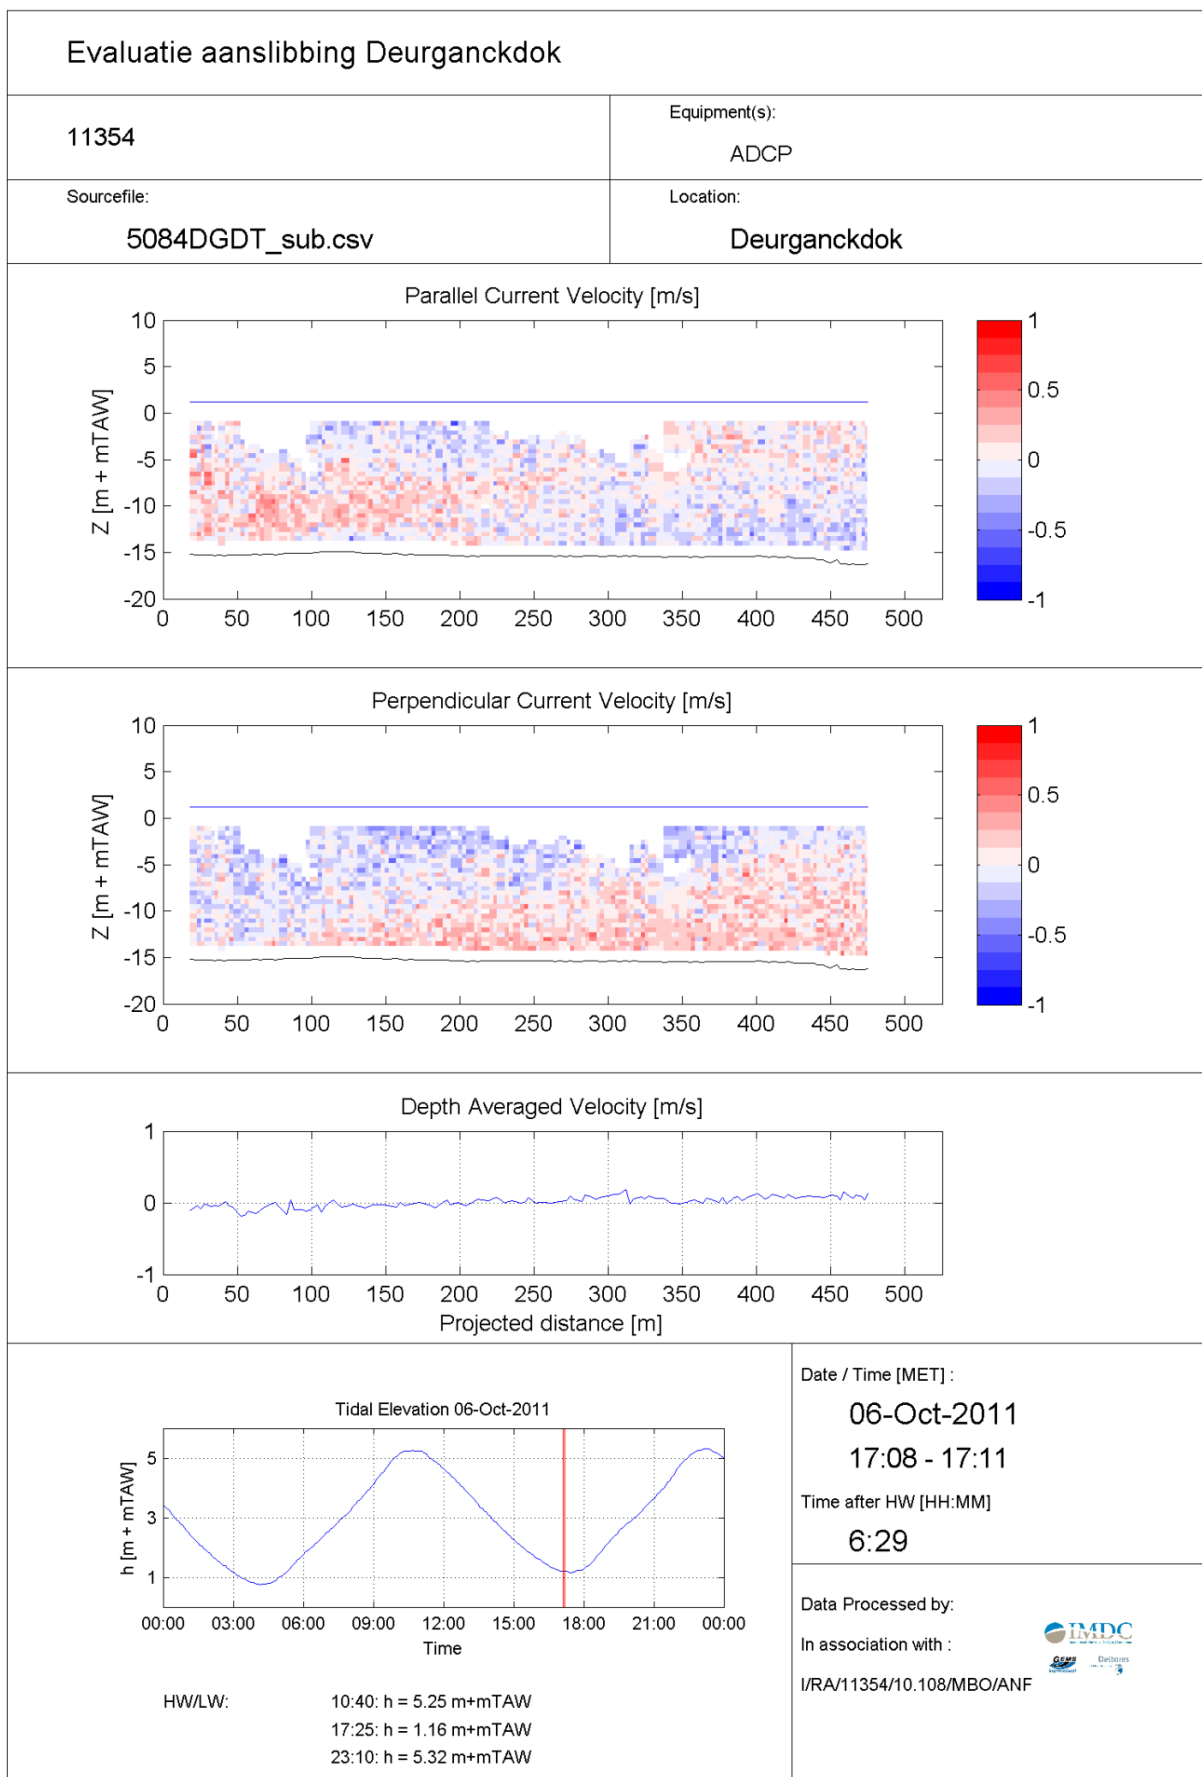

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5084DGDT_sub.csv

Location:

Deurganckdok

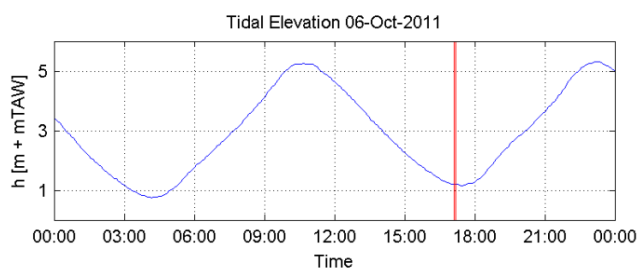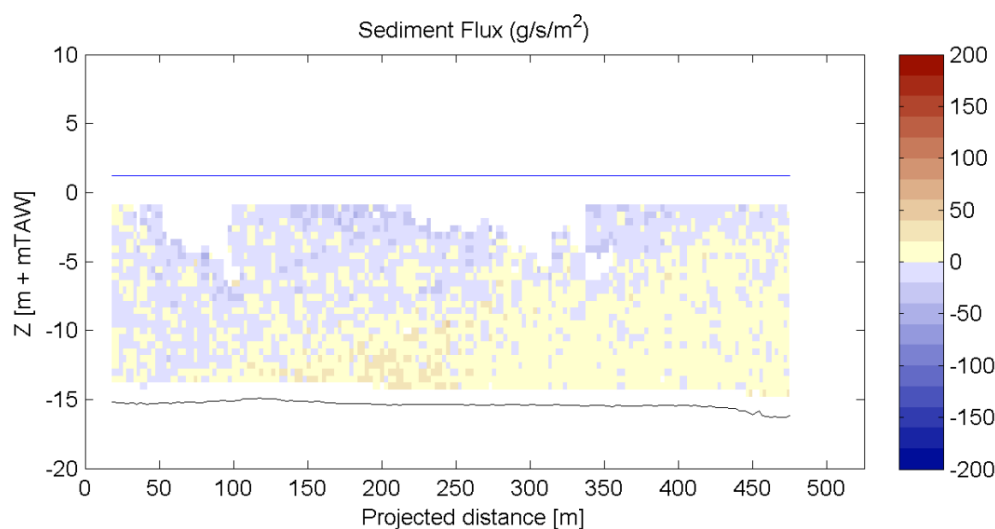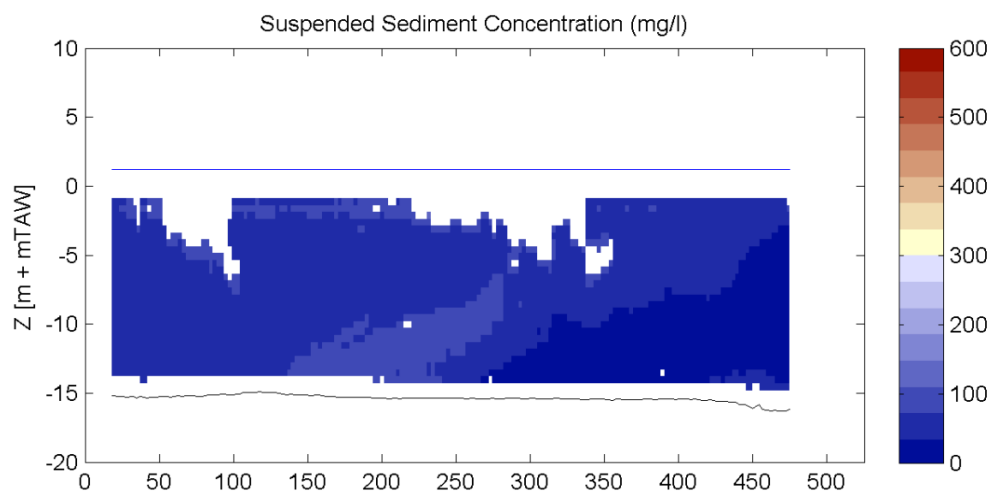

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

17:08 - 17:11

Time after HW [HH:MM]


6:29


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




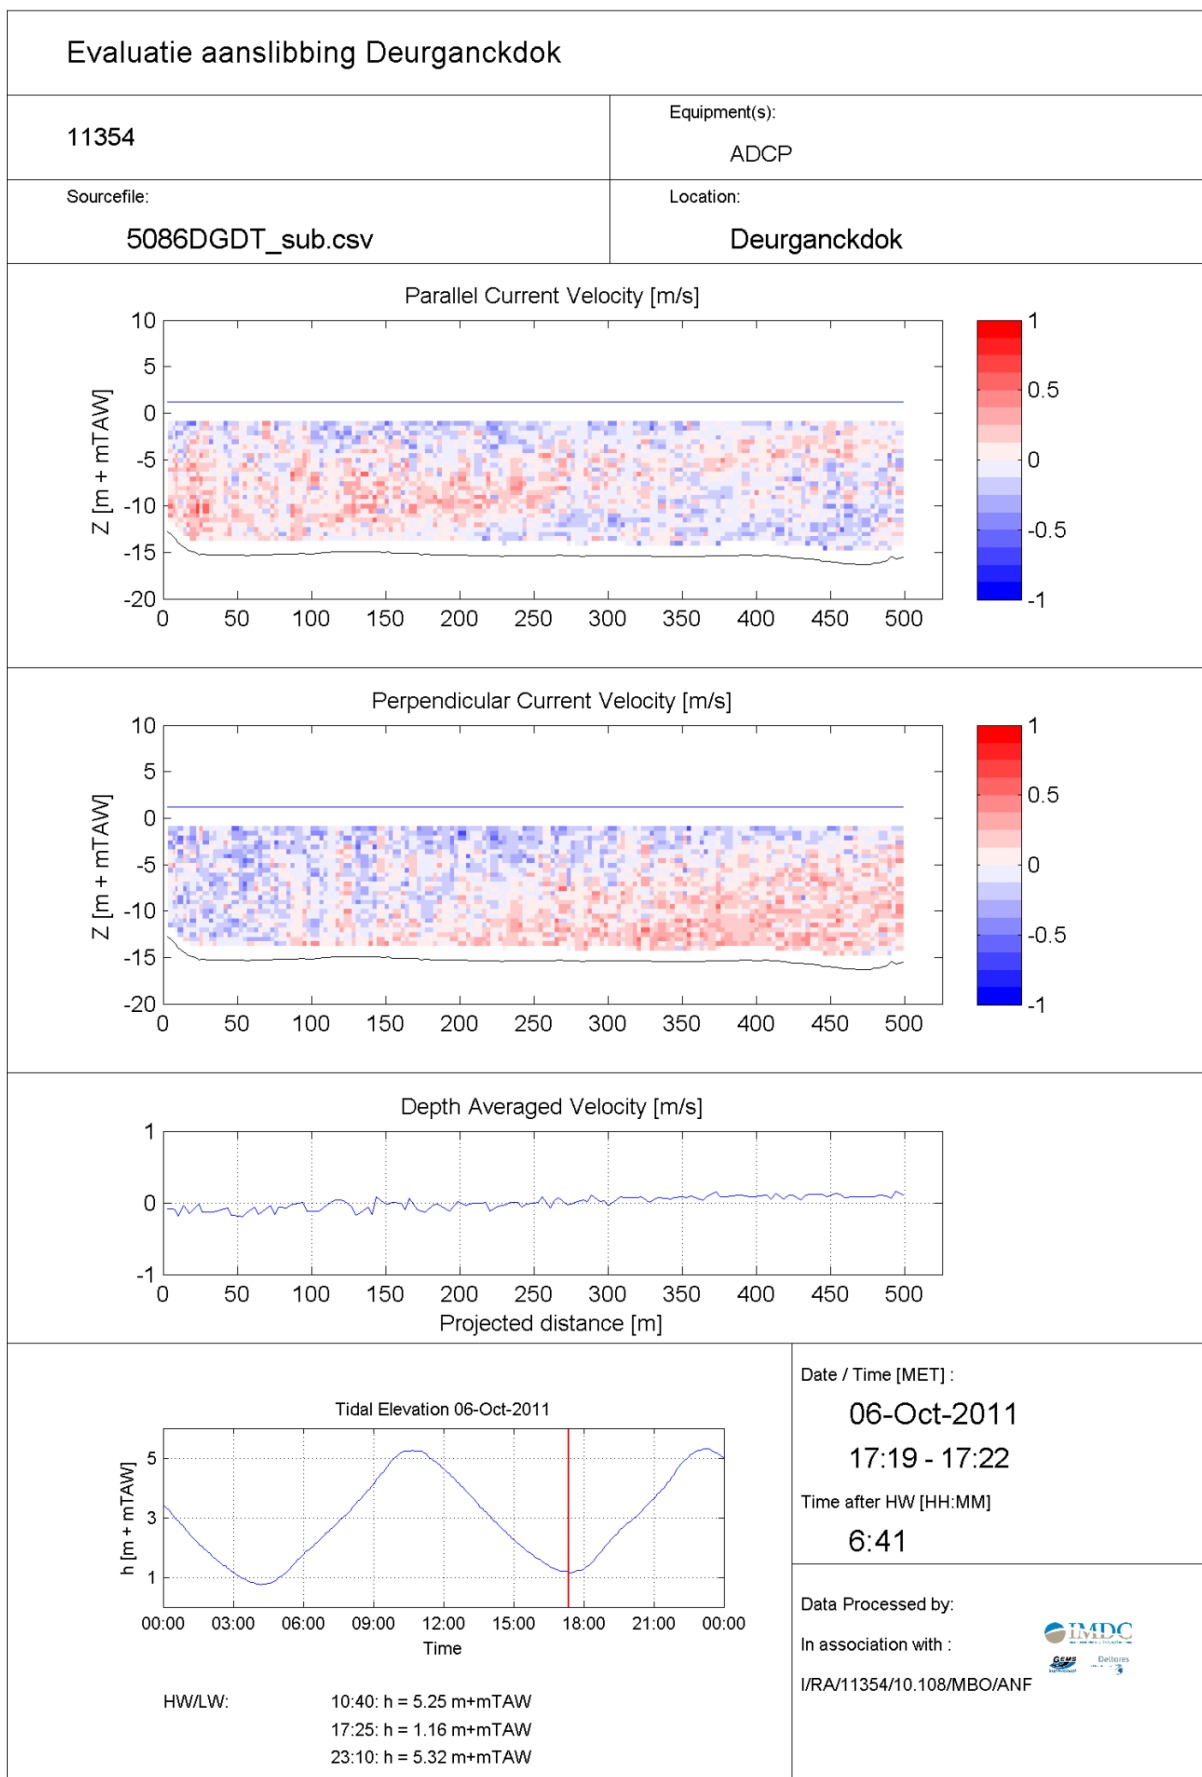

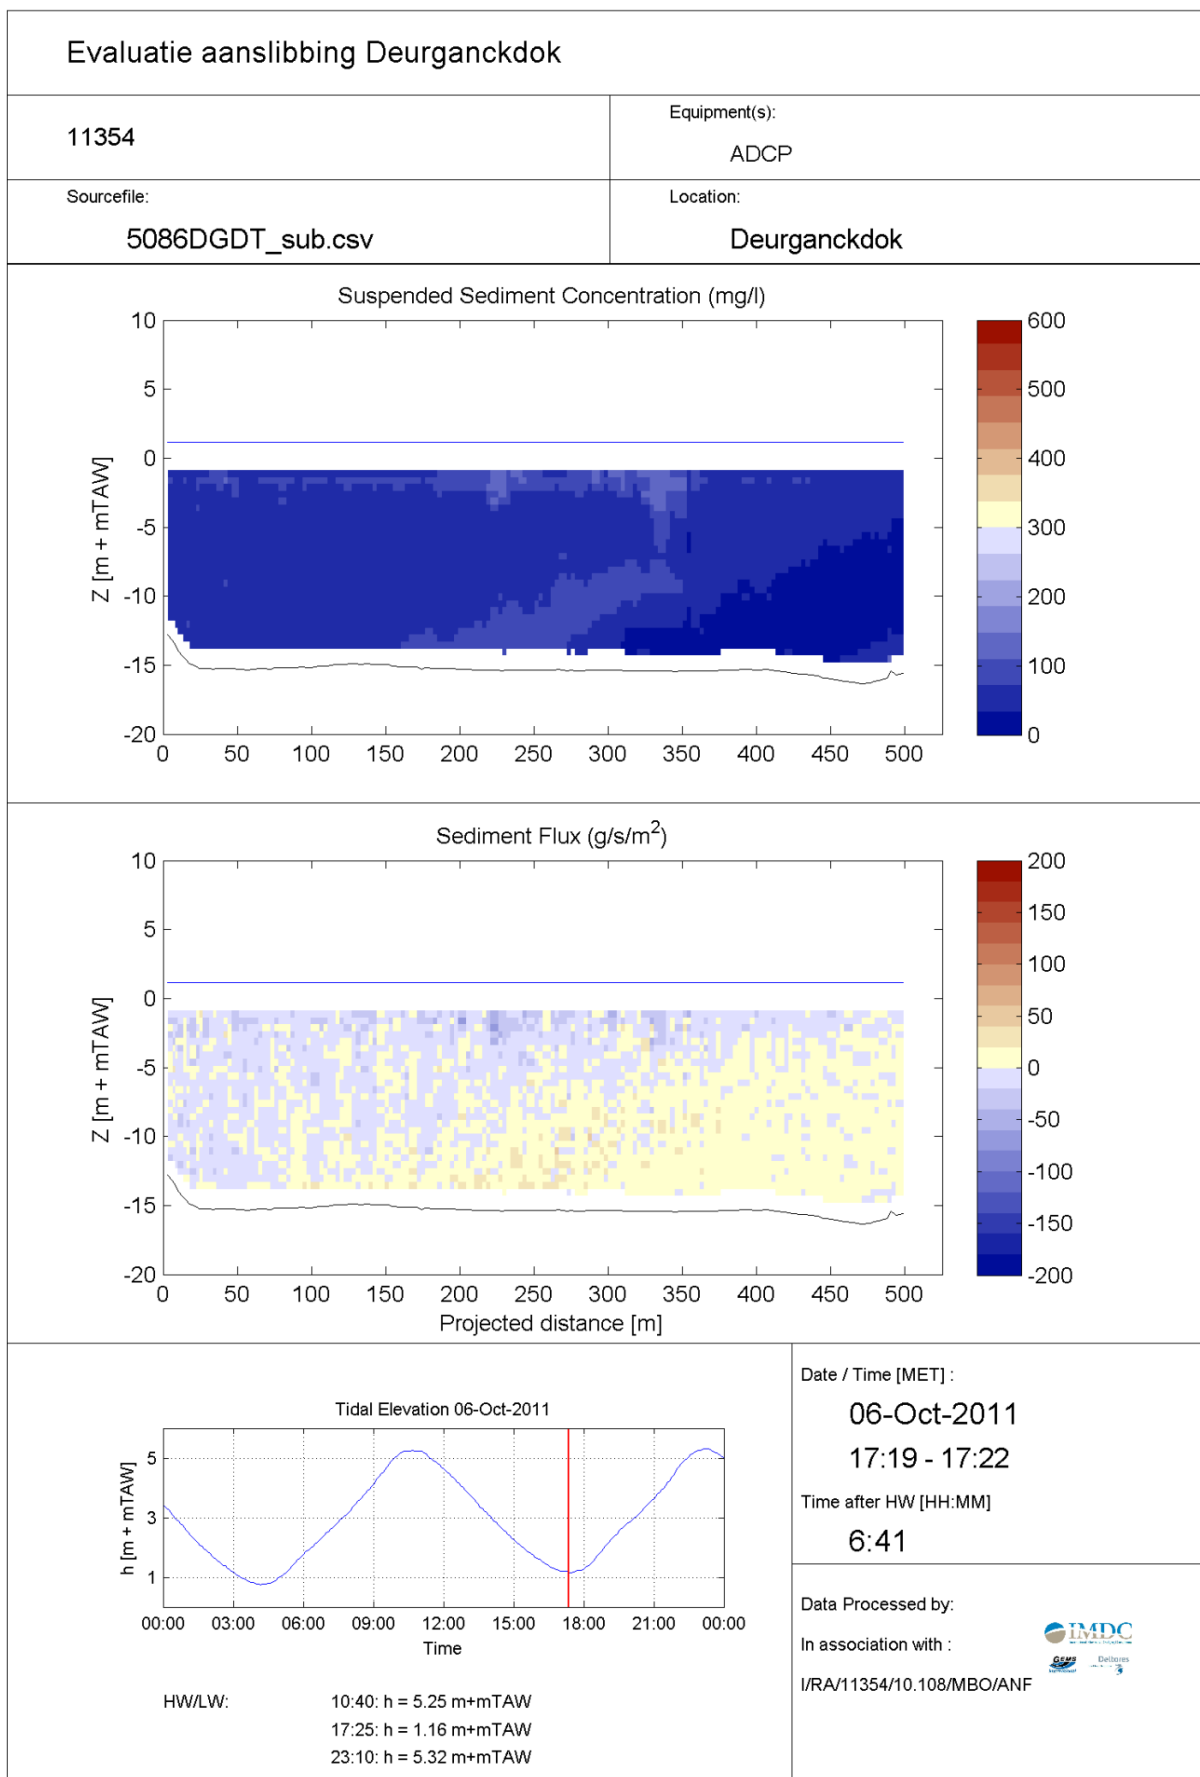

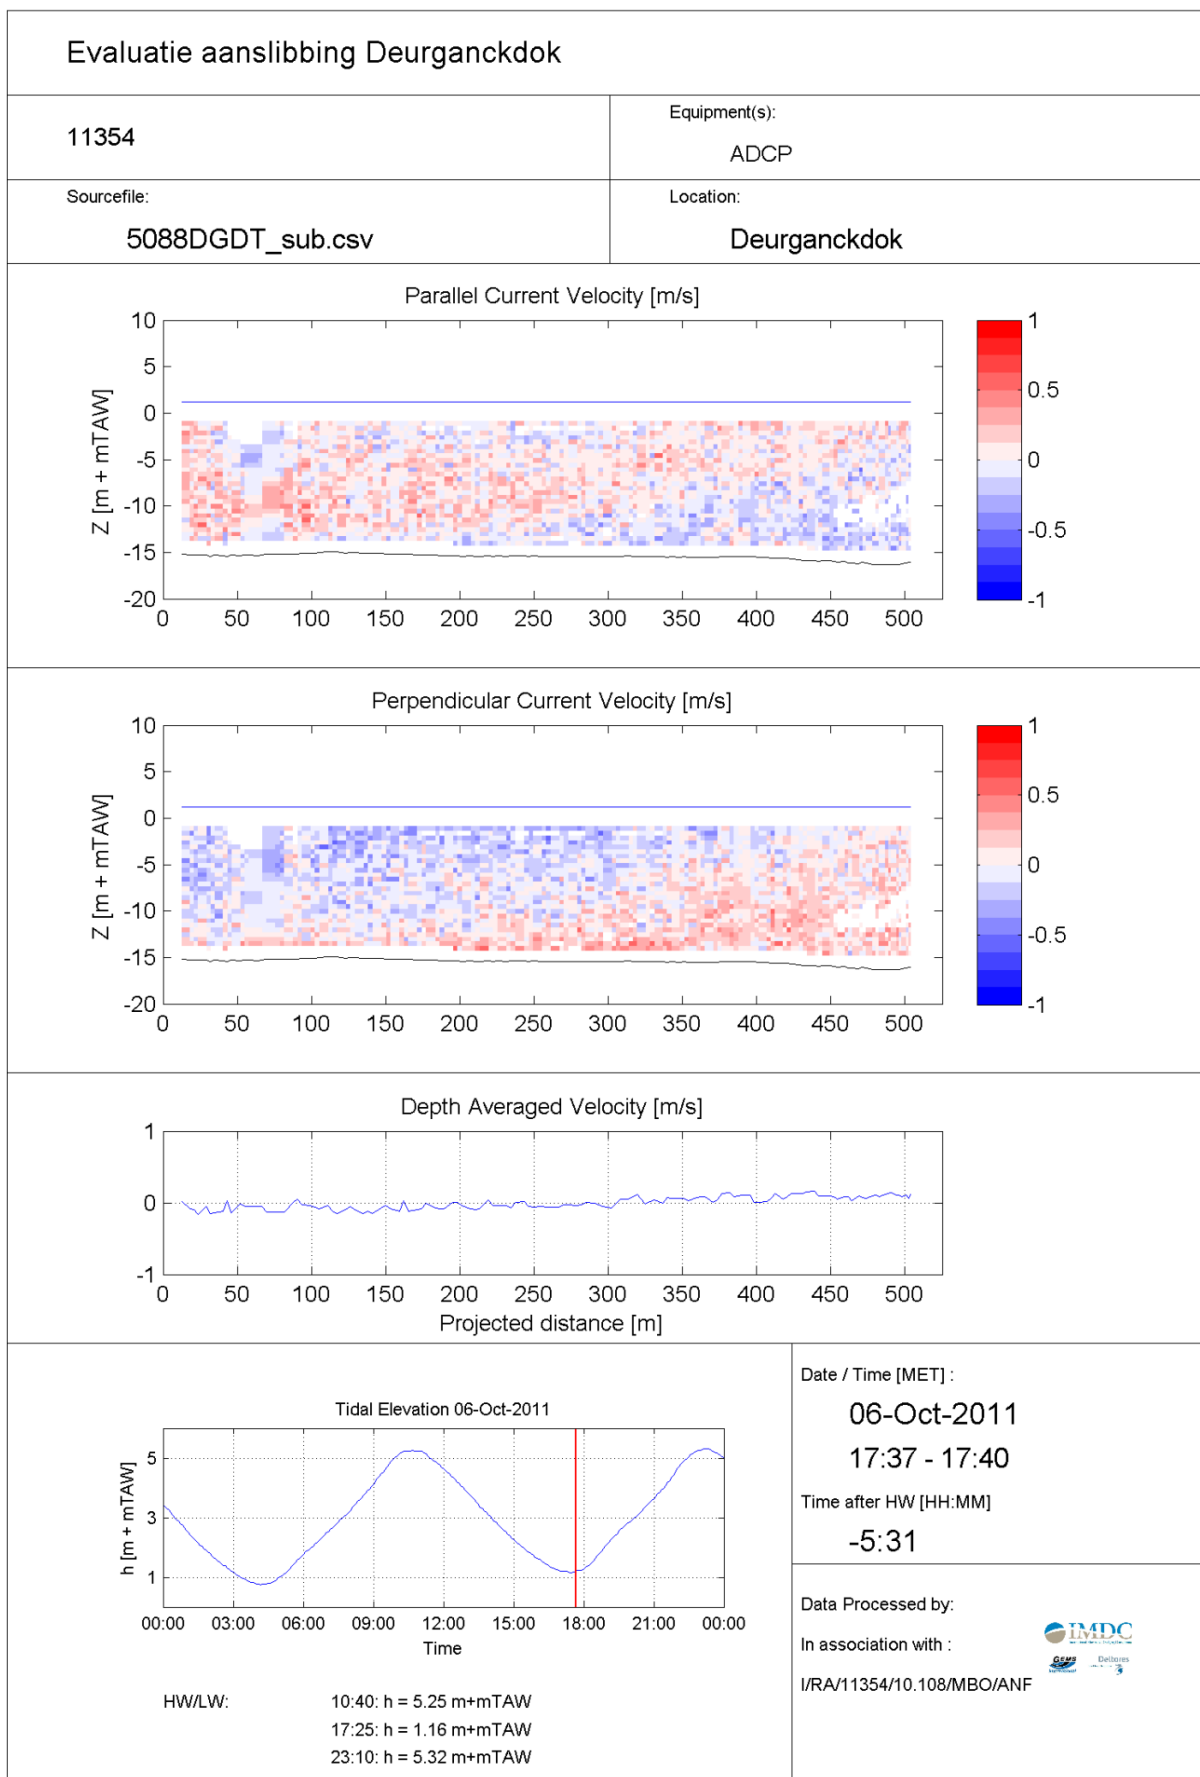

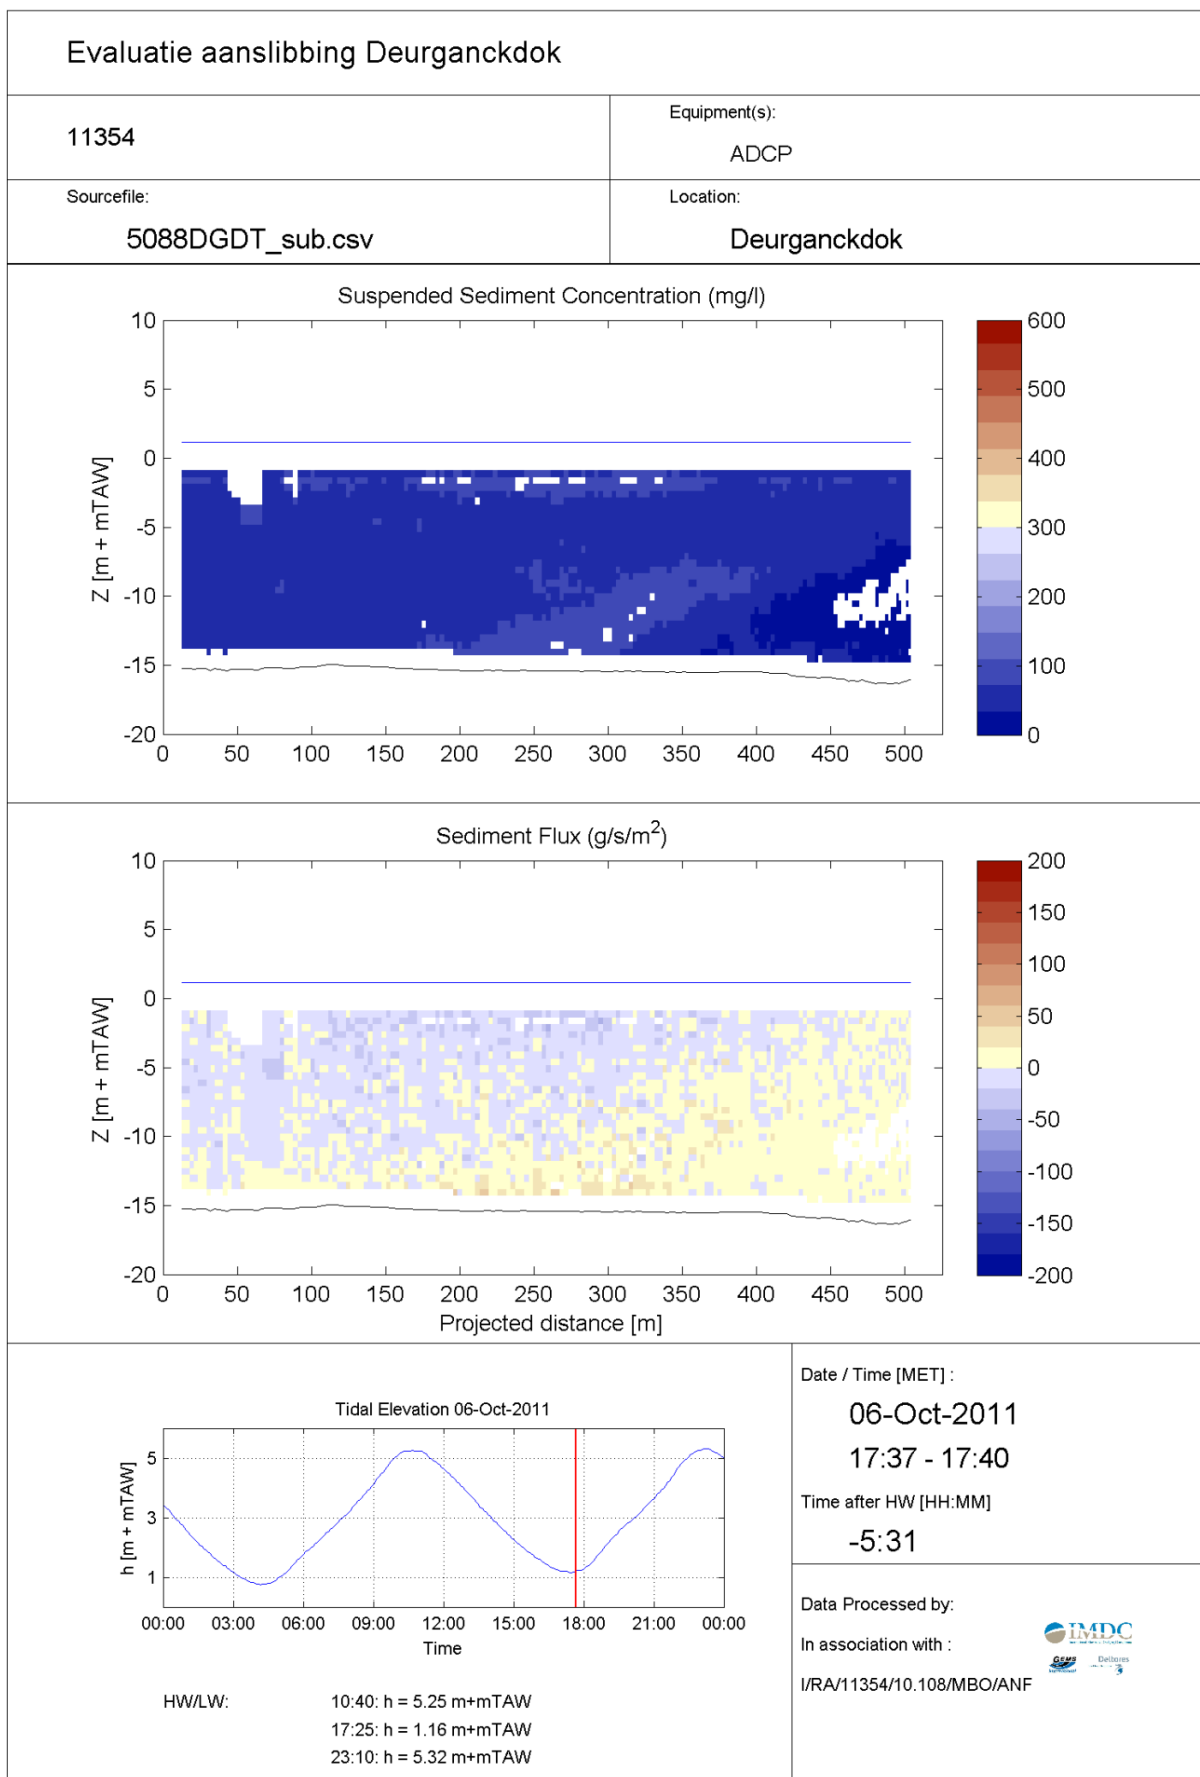

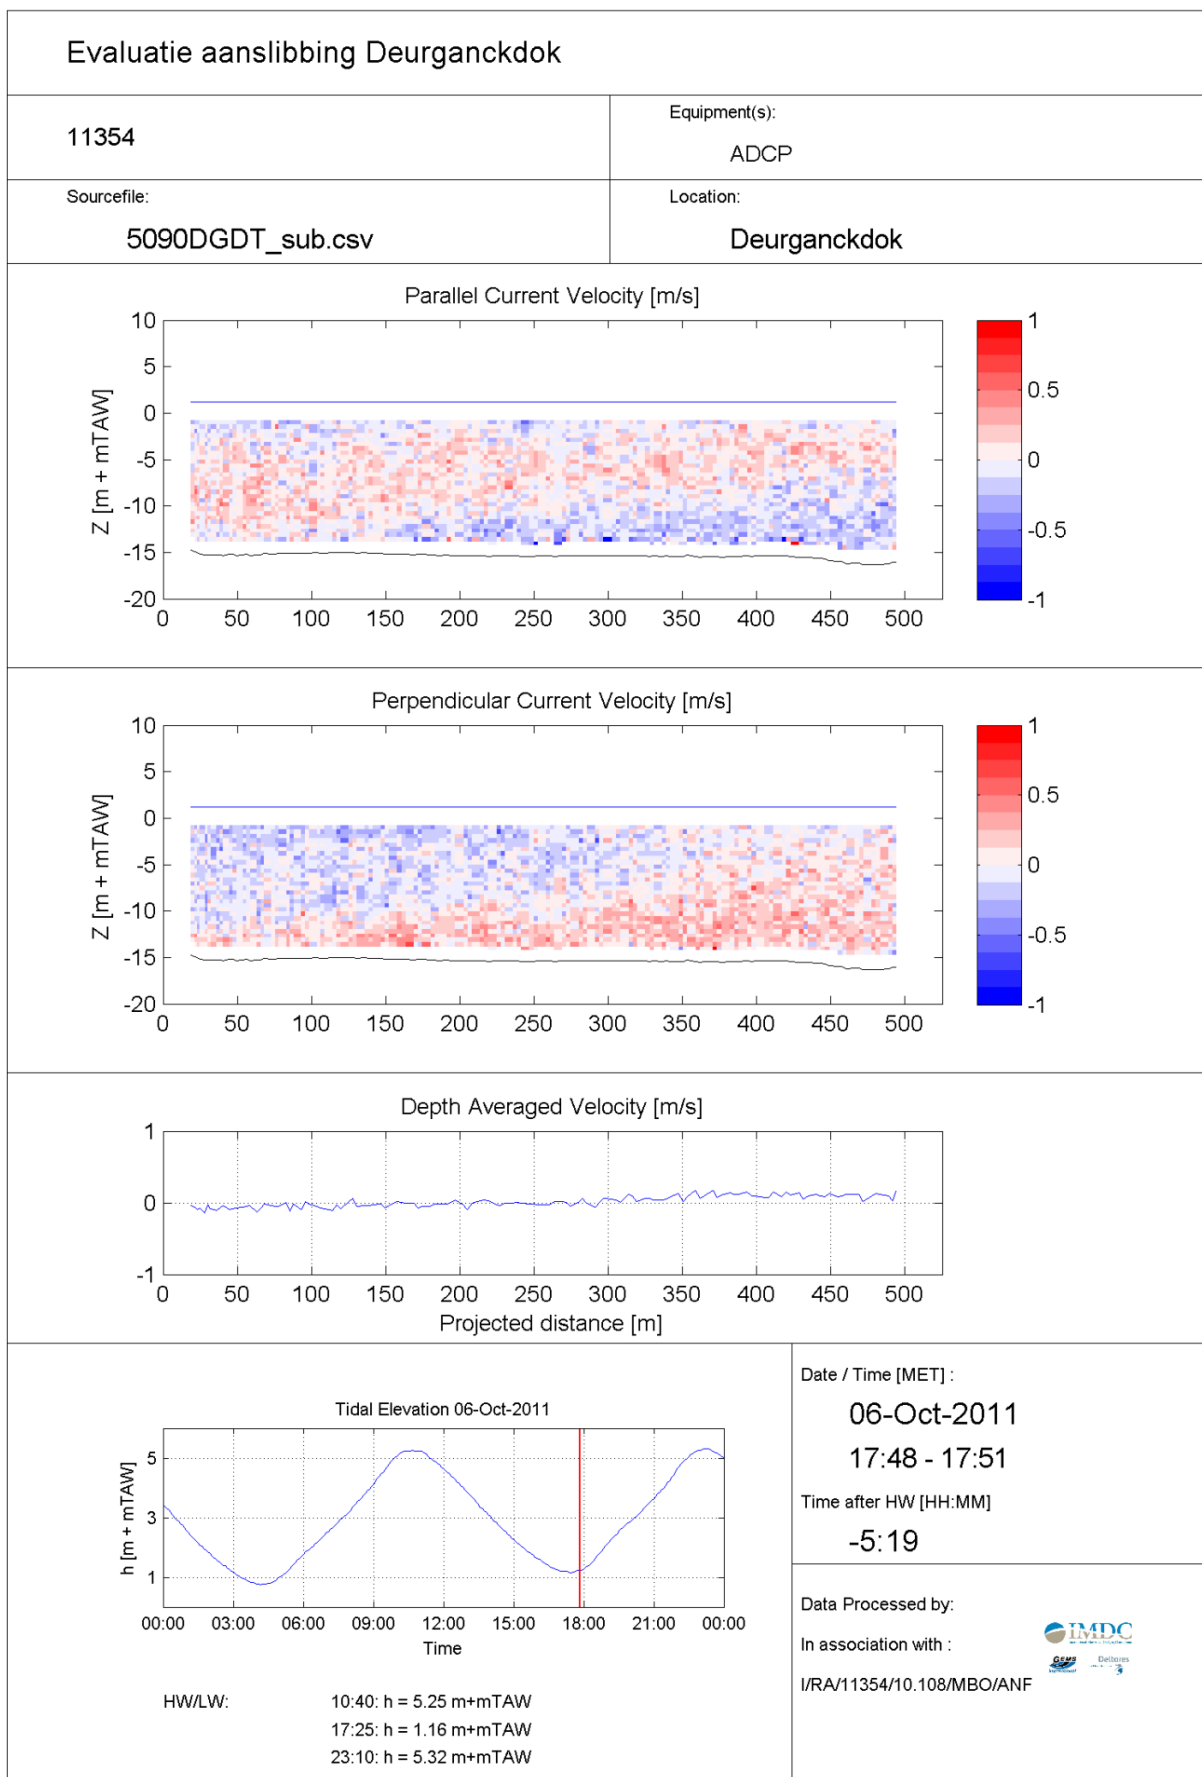

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5090DGMT_sub.csv

Location:

Deurganckdok

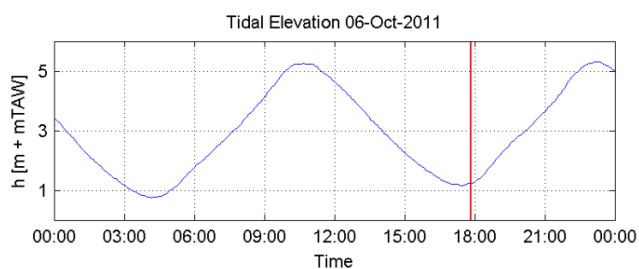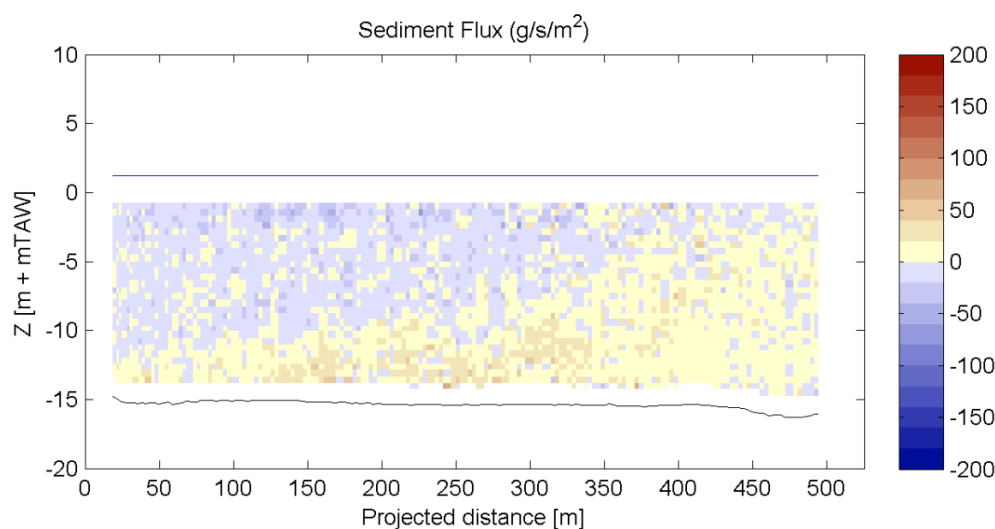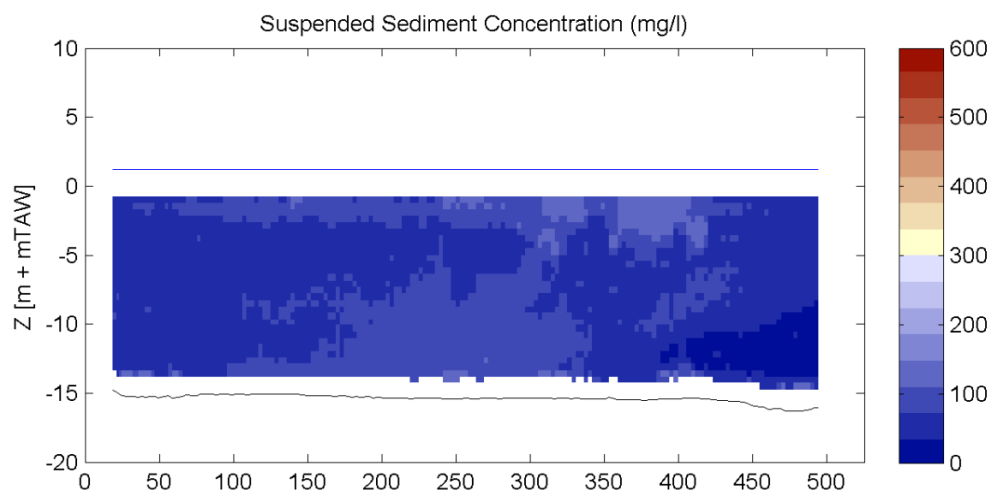

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

17:48 - 17:51

Time after HW [HH:MM]


-5:19

Data Processed by:

In association with :

I/RA/11354/10.108/MBO/ANF



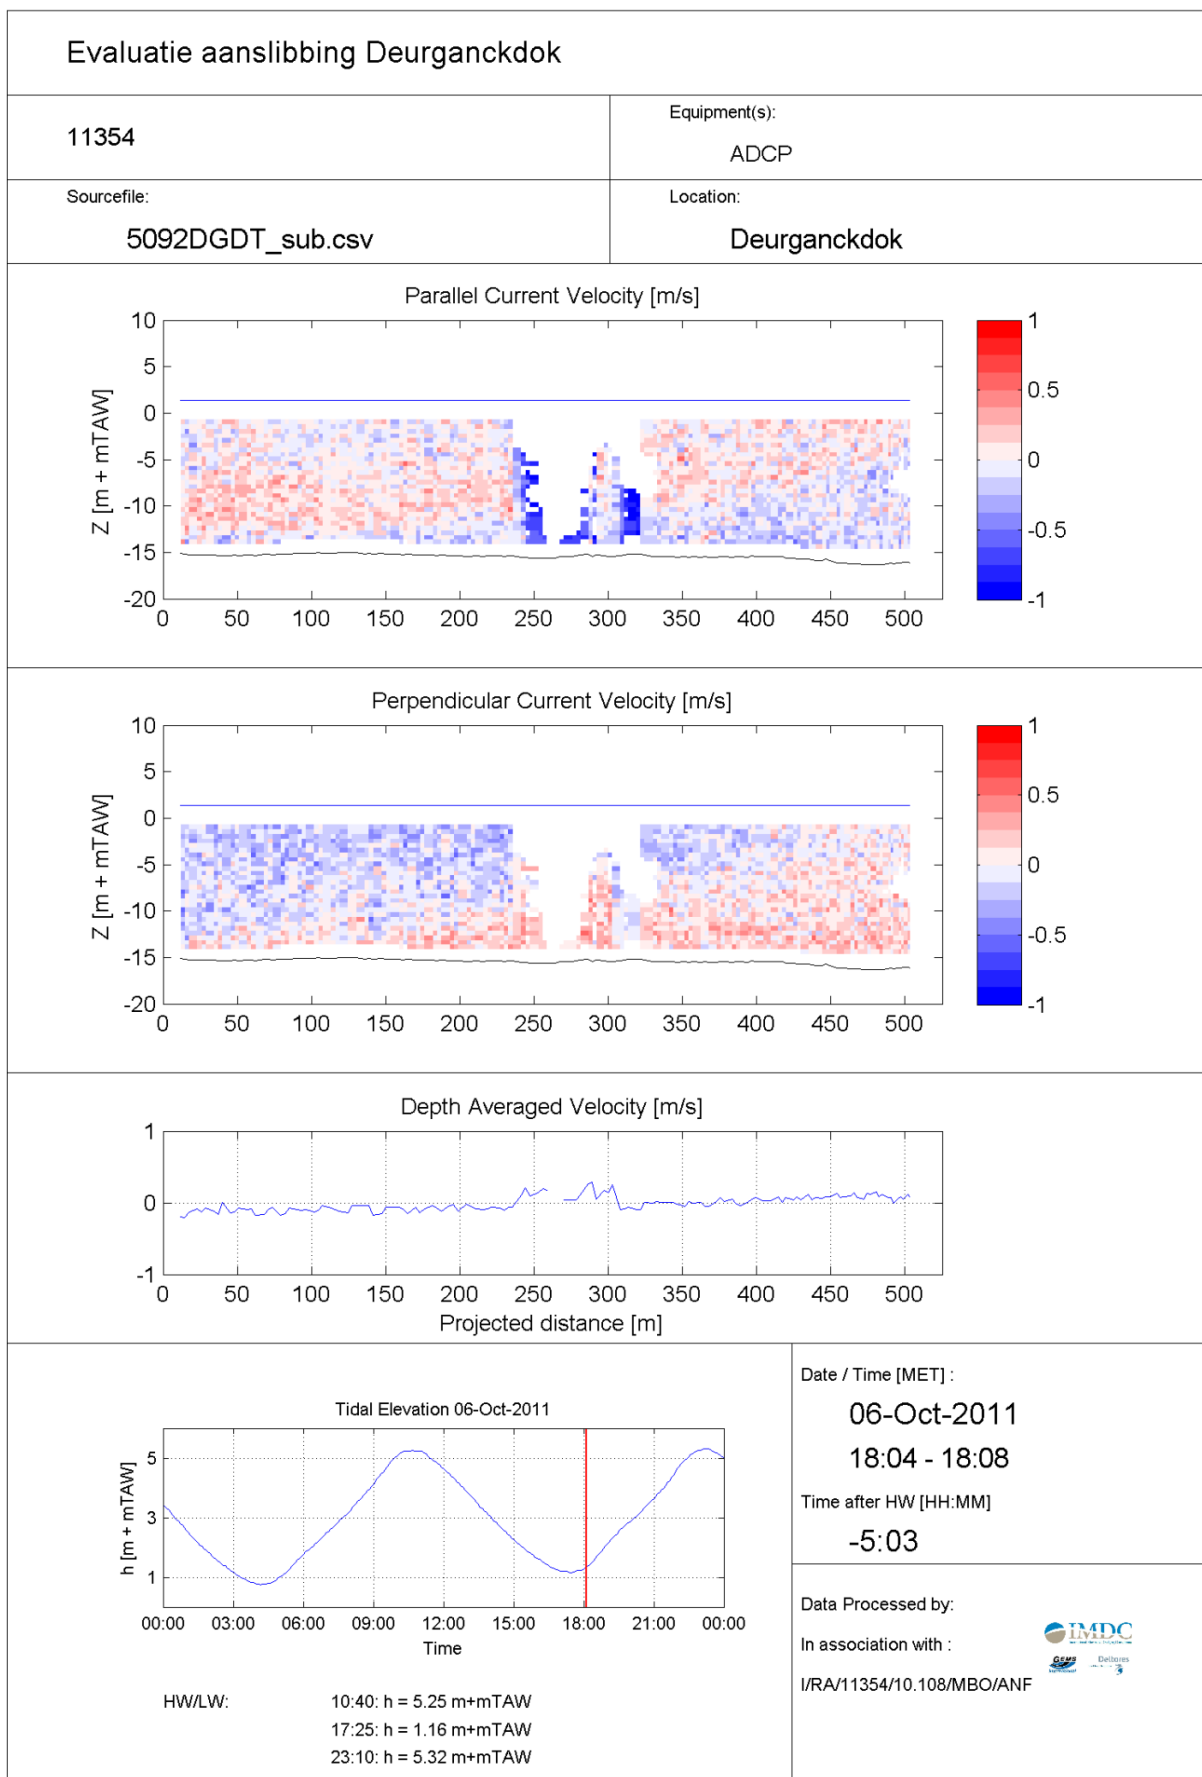

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5092DGDT_sub.csv

Location:

Deurganckdok

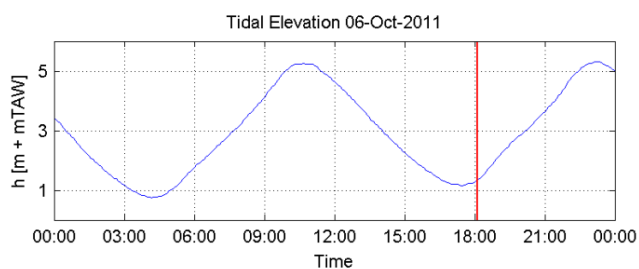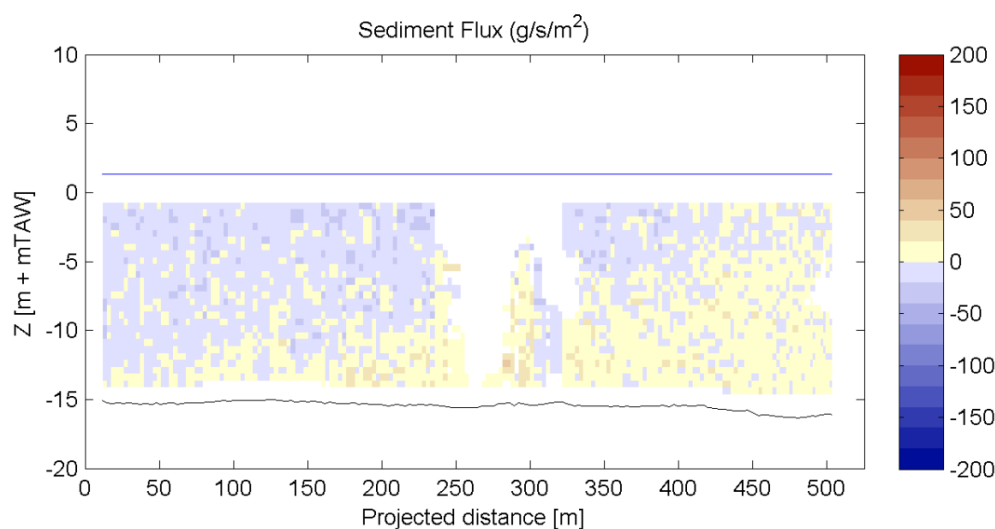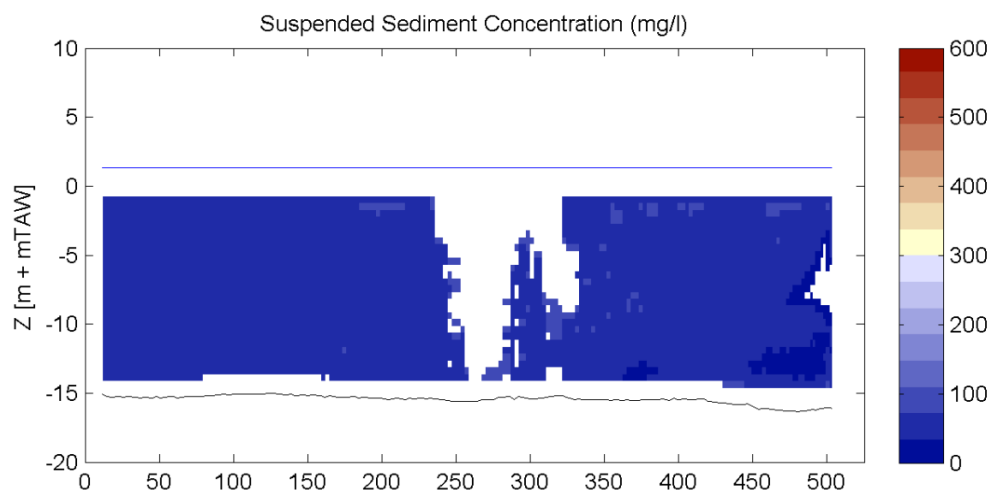

HW/LW: 10:40: h = 5.25 m+mTAW
17:25: h = 1.16 m+mTAW
23:10: h = 5.32 m+mTAW

Date / Time [MET] :

06-Oct-2011

18:04 - 18:08

Time after HW [HH:MM]


-5:03


Data Processed by:


In association with :

I/RA/11354/10.108/MBO/ANF



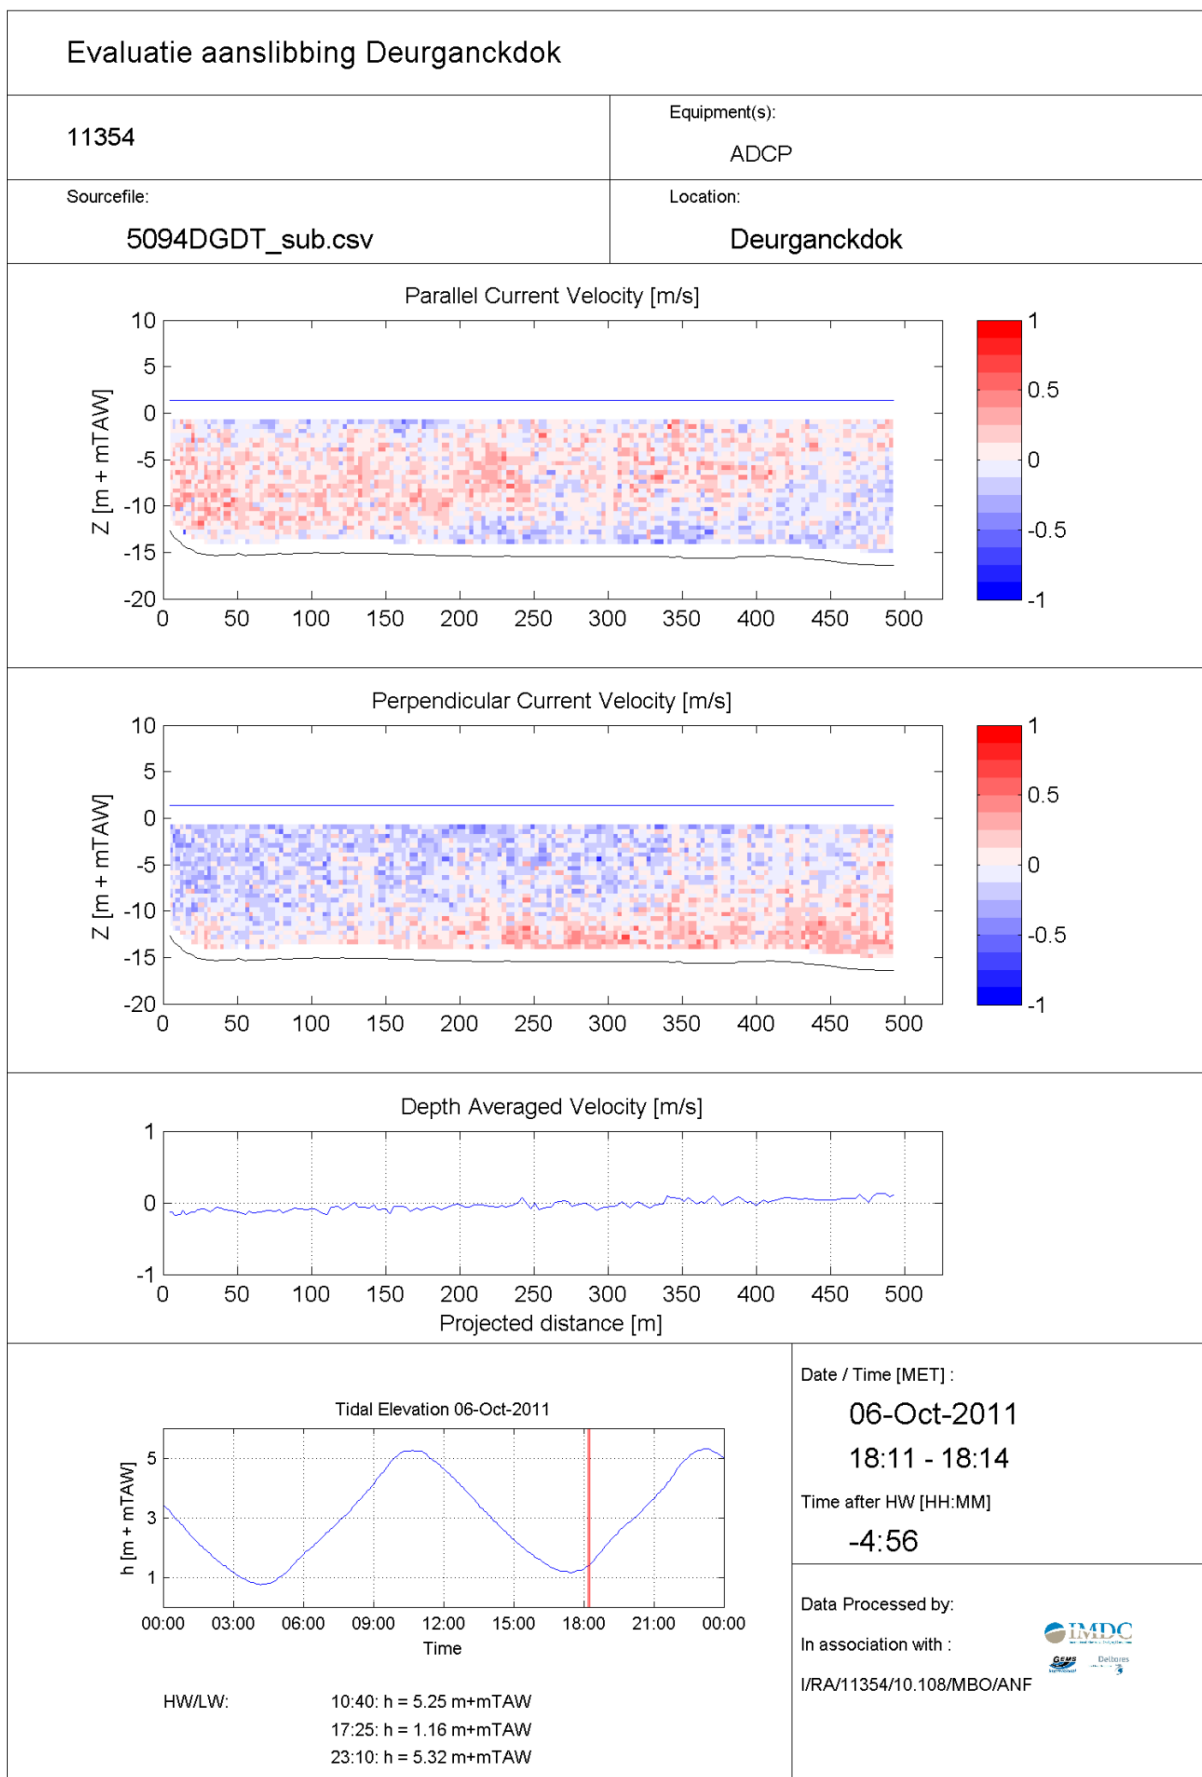

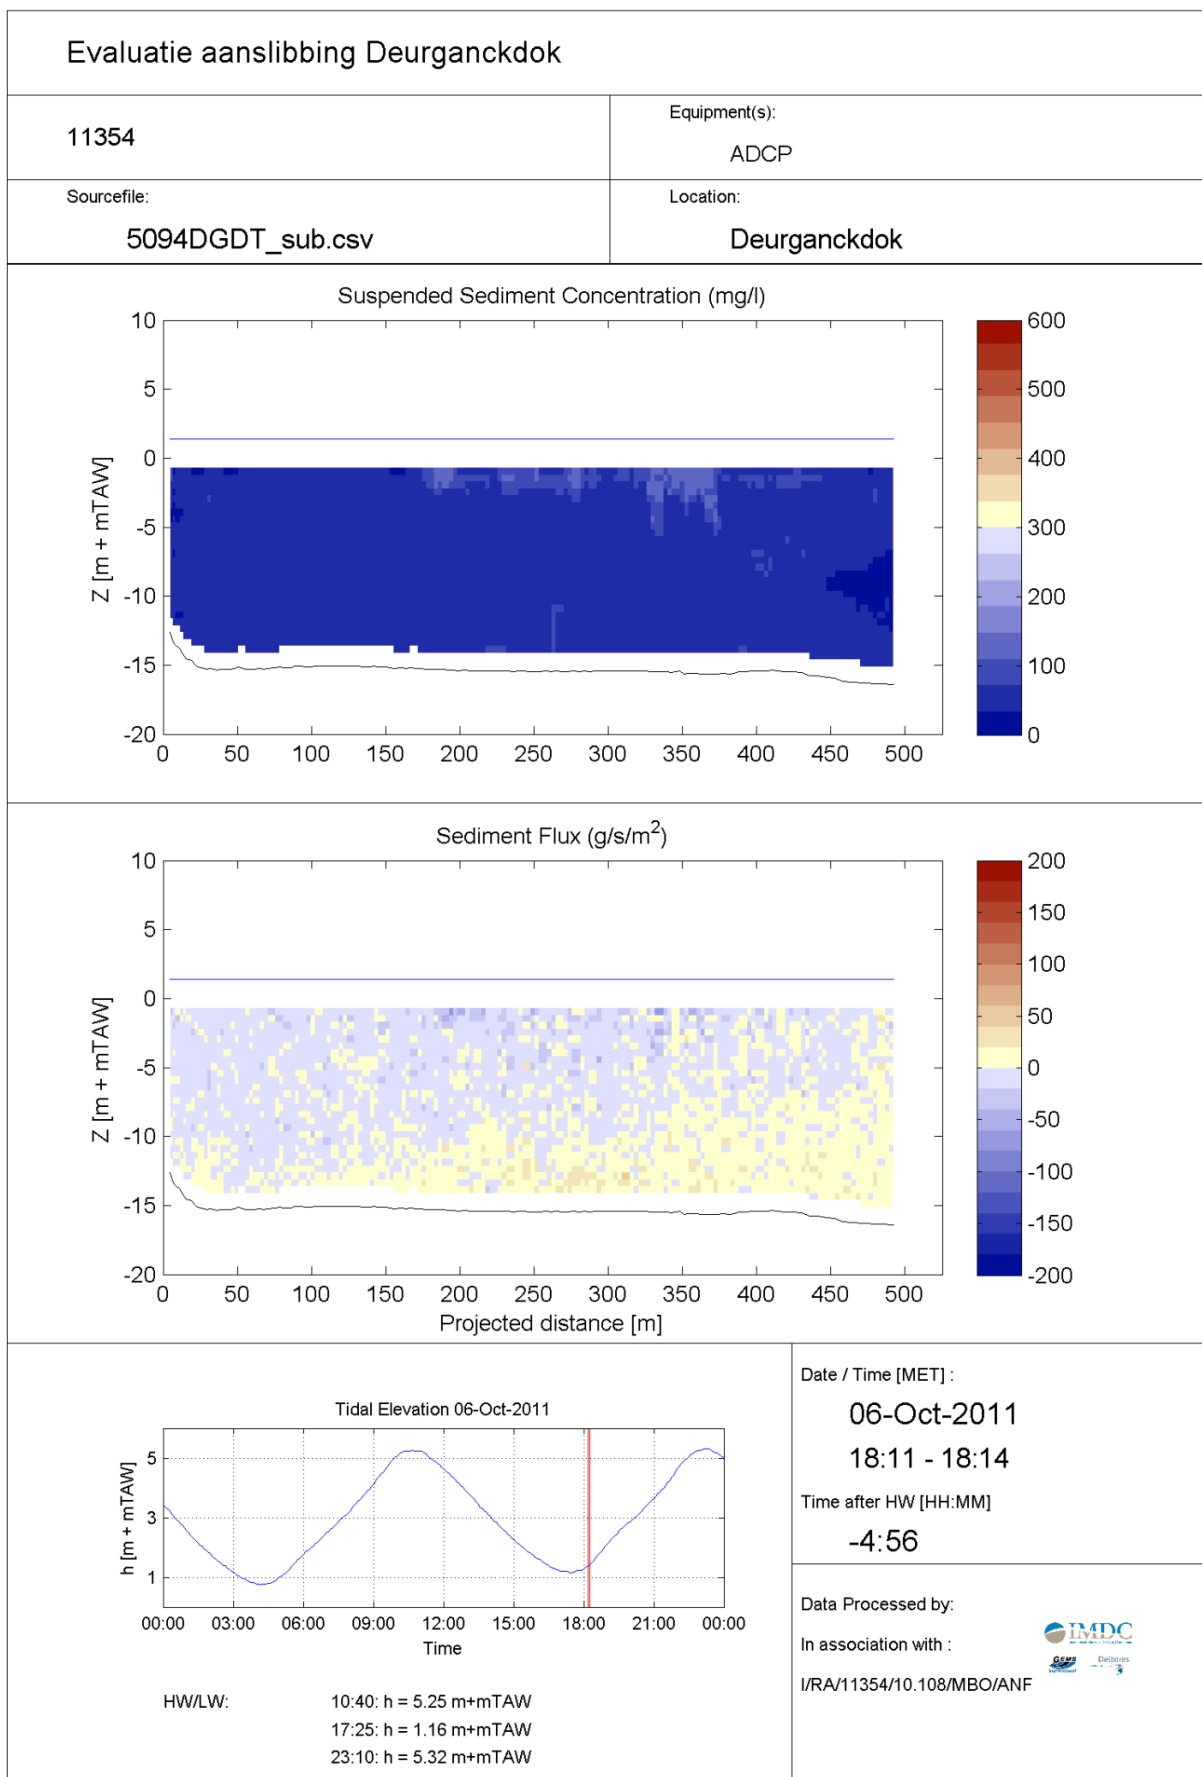

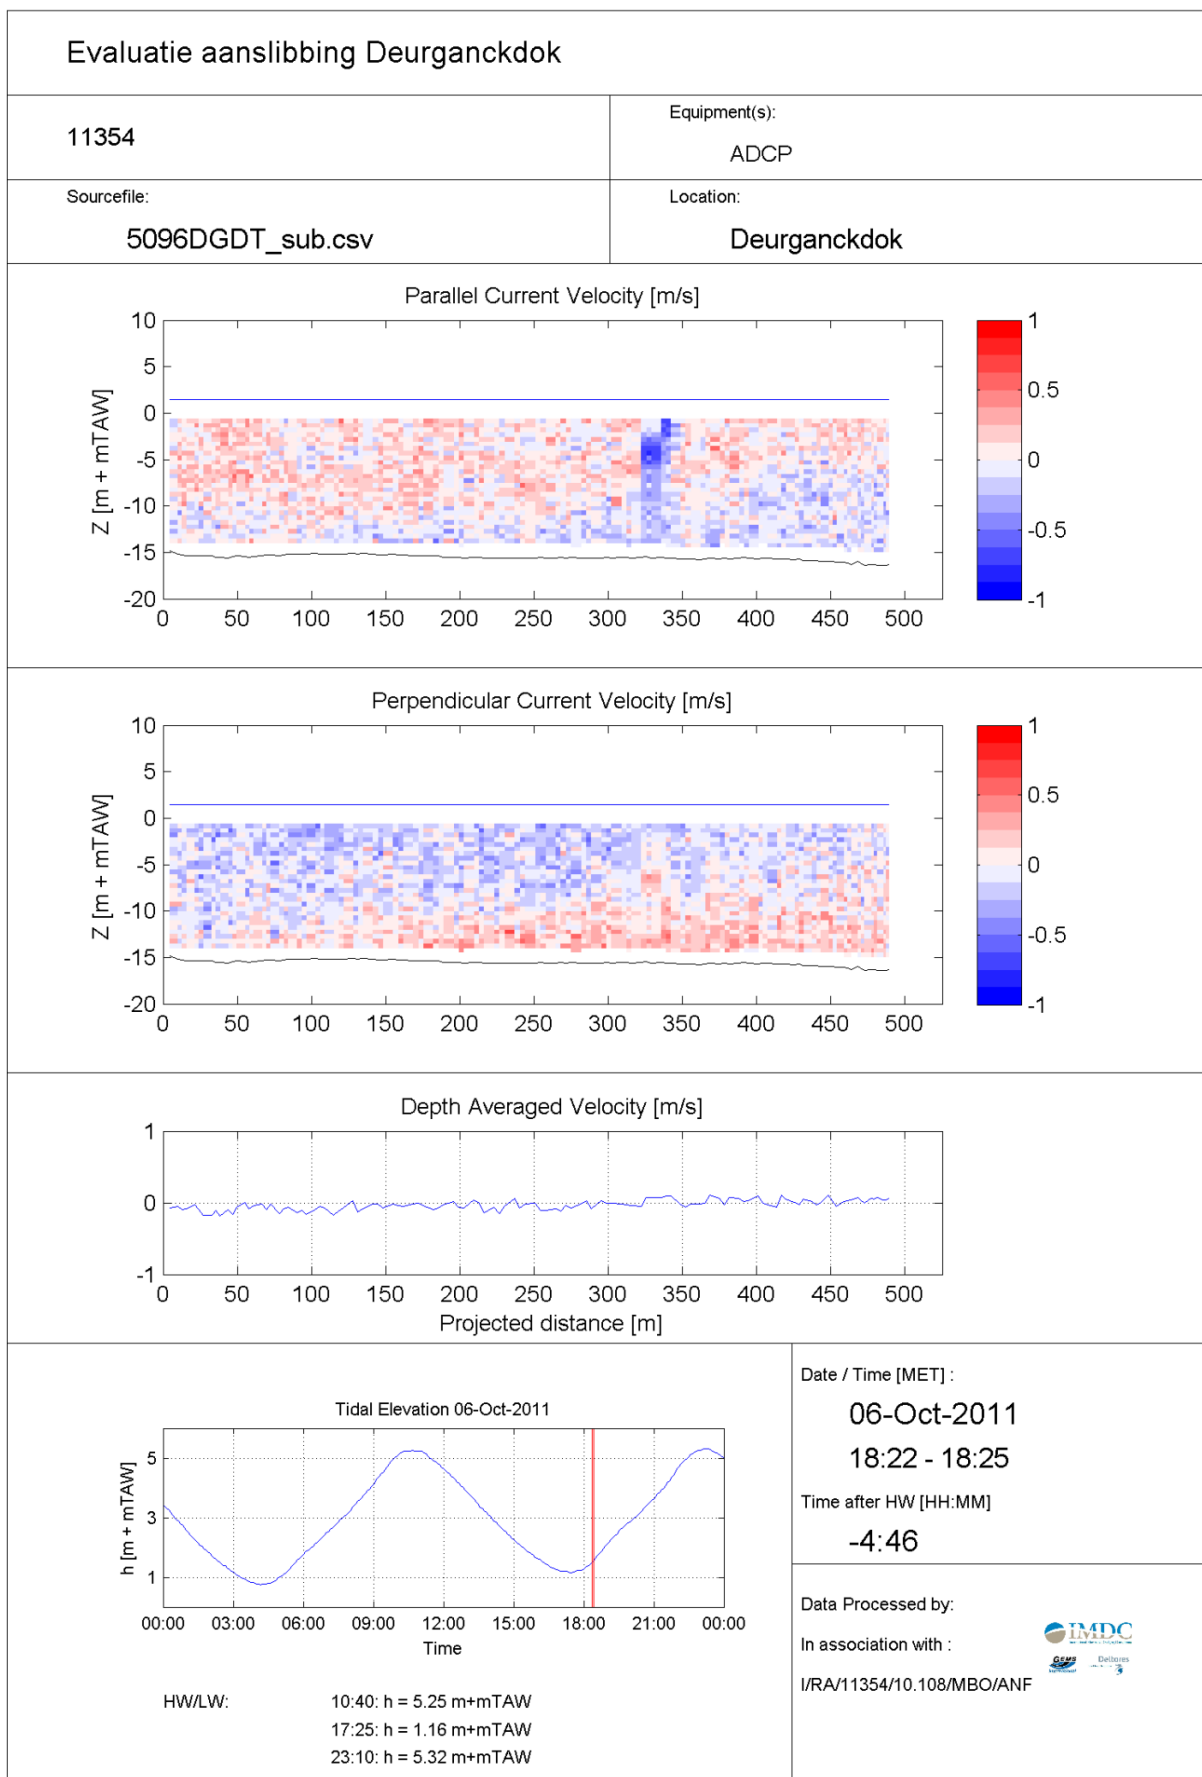

Evaluatie aanslibbing Deurganckdok

11354

Equipment(s):




ADCP

Sourcefile:

5096DGMT_sub.csv

Location:

Deurganckdok

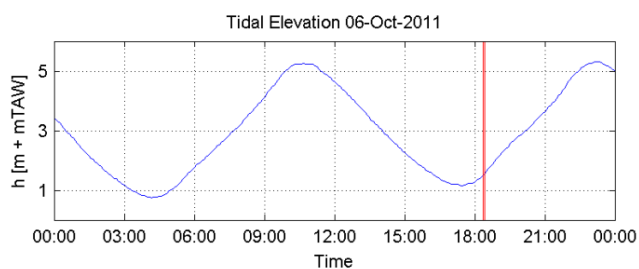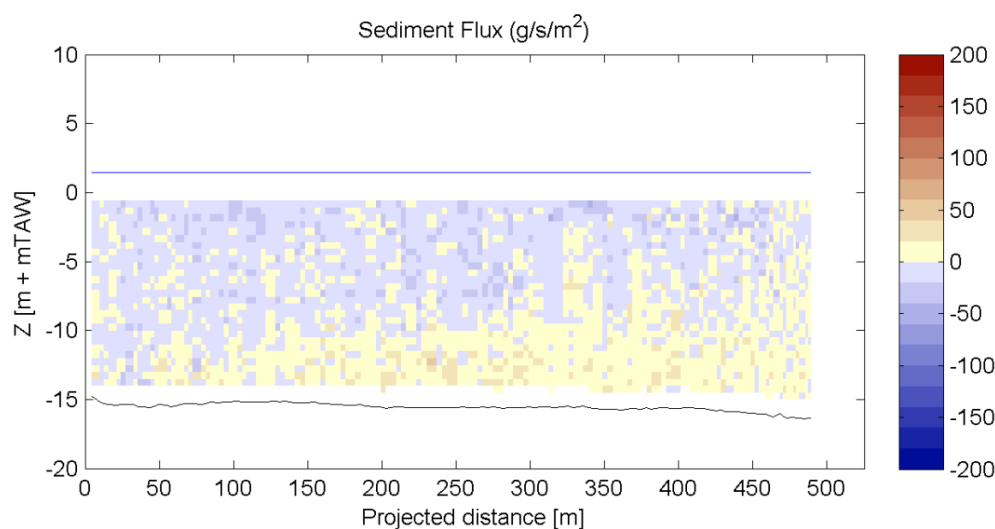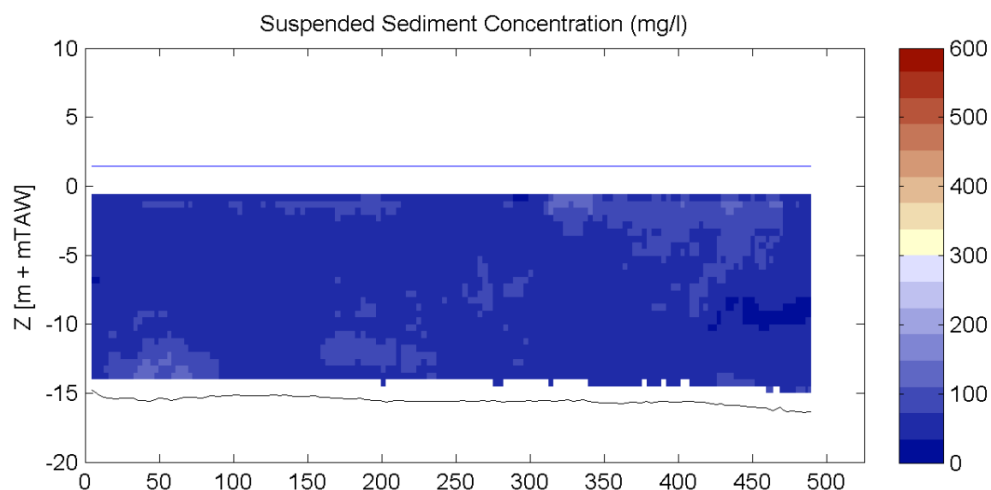

HW/LW: 10:40: $h = 5.25 \text{ m+mTAW}$
17:25: $h = 1.16 \text{ m+mTAW}$
23:10: $h = 5.32 \text{ m+mTAW}$

Date / Time [MET] :

06-Oct-2011

18:22 - 18:25

Time after HW [HH:MM]


-4:46


Data Processed by:


In association with :


I/RA/11354/10.108/MBO/ANF




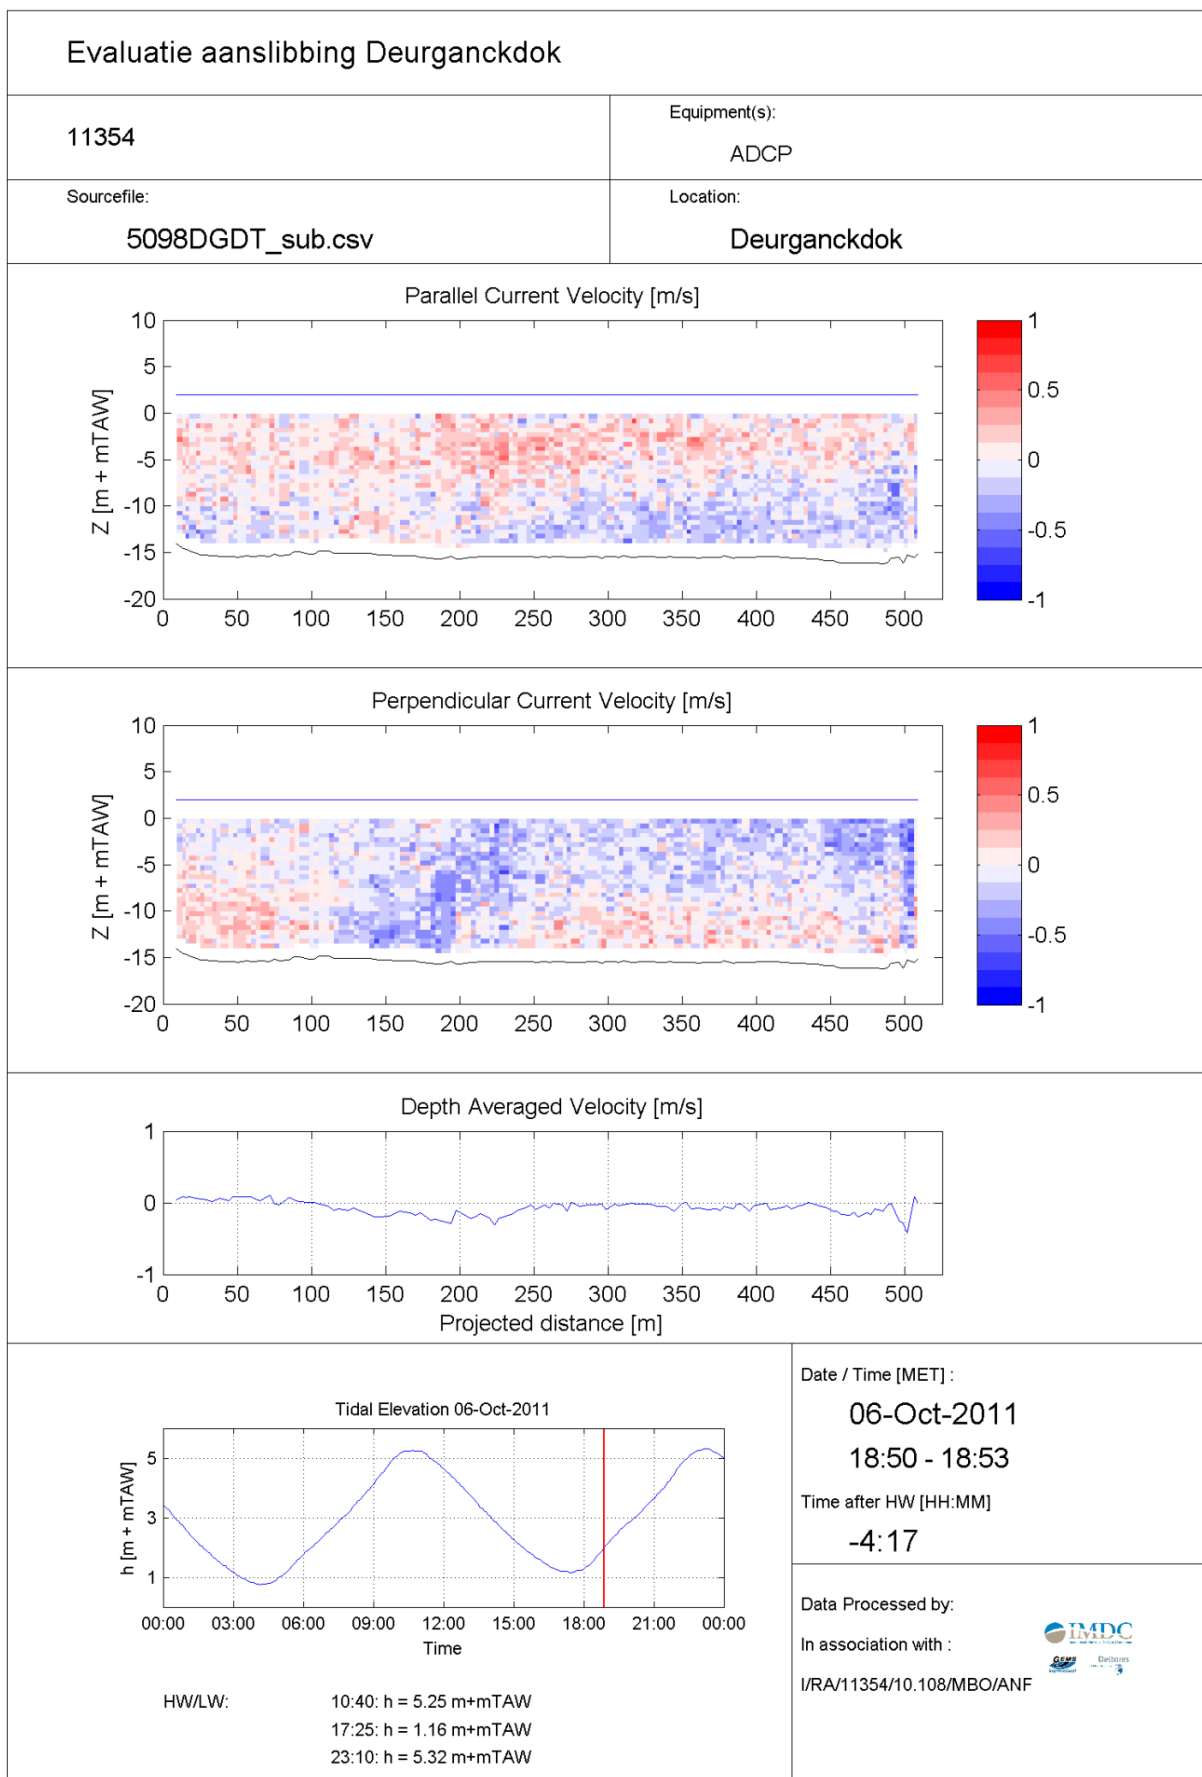


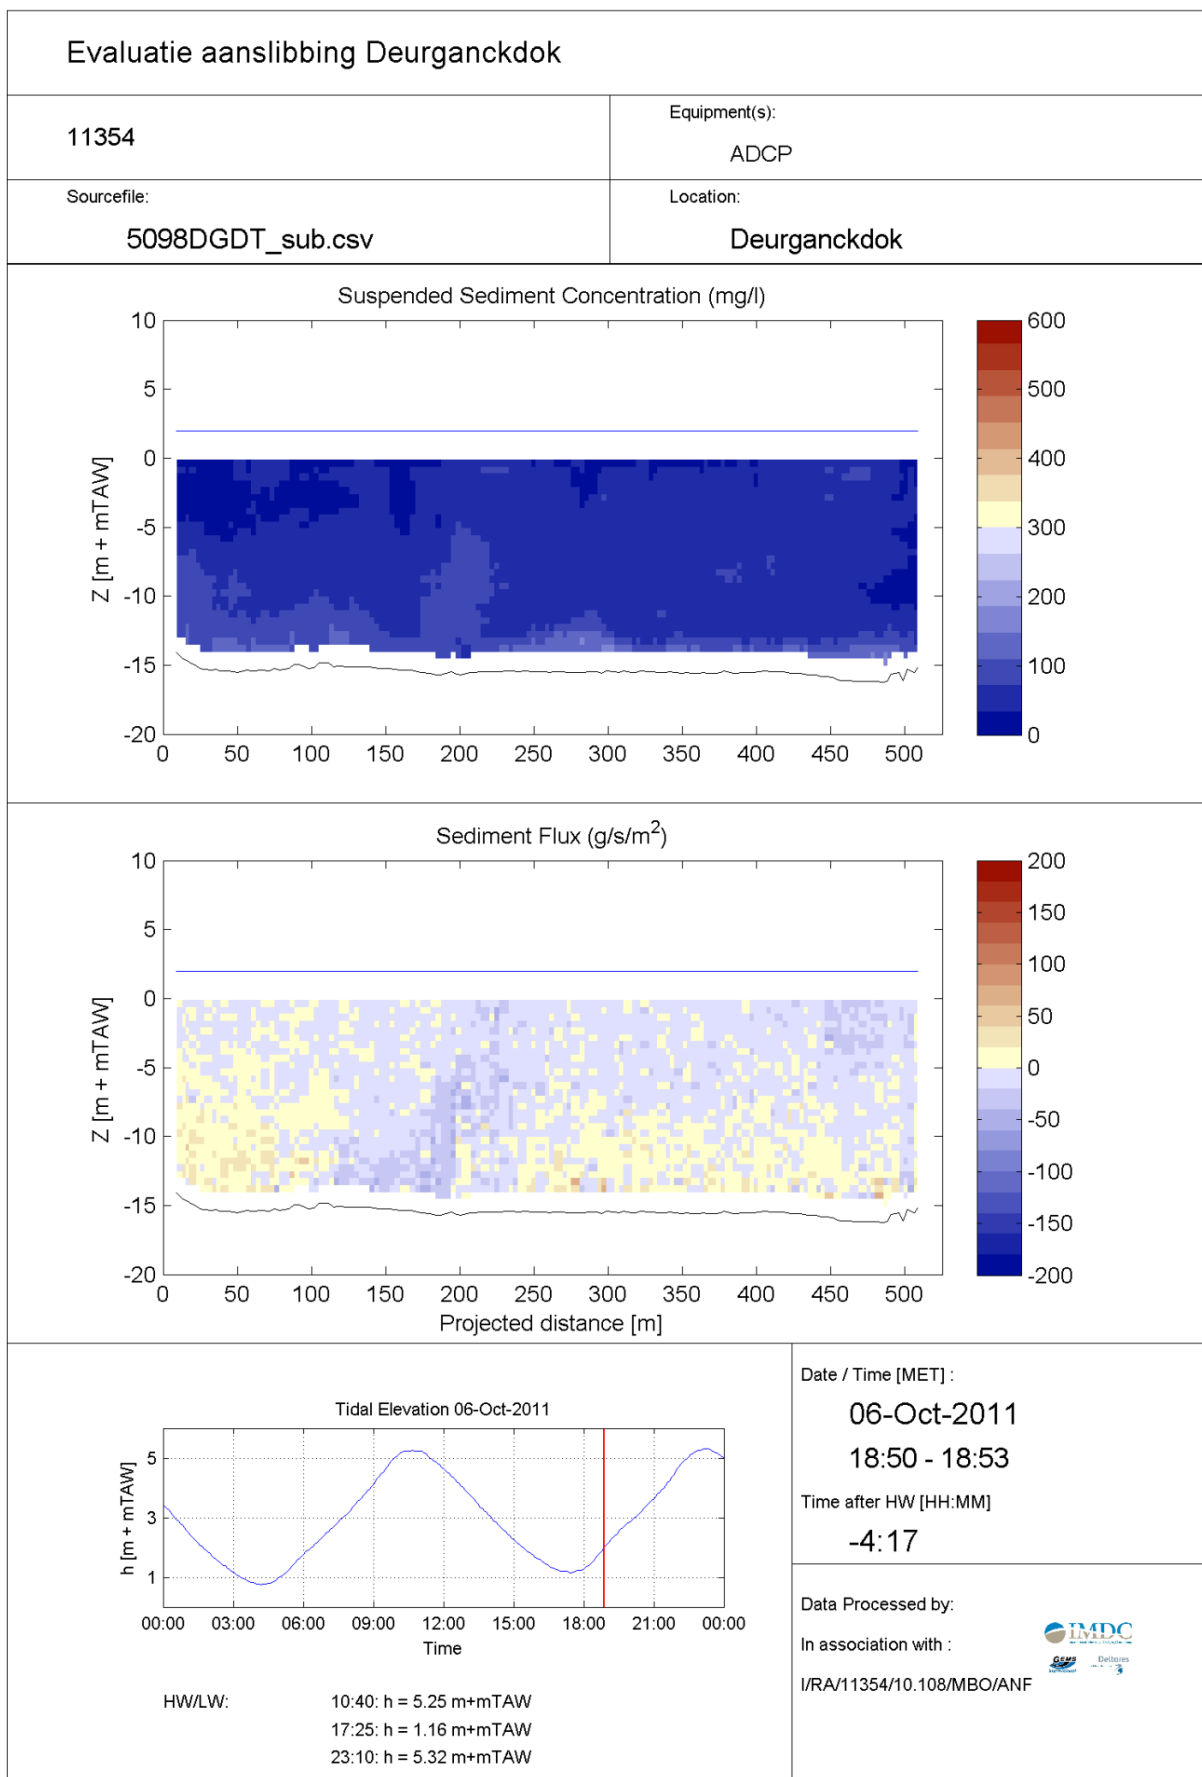


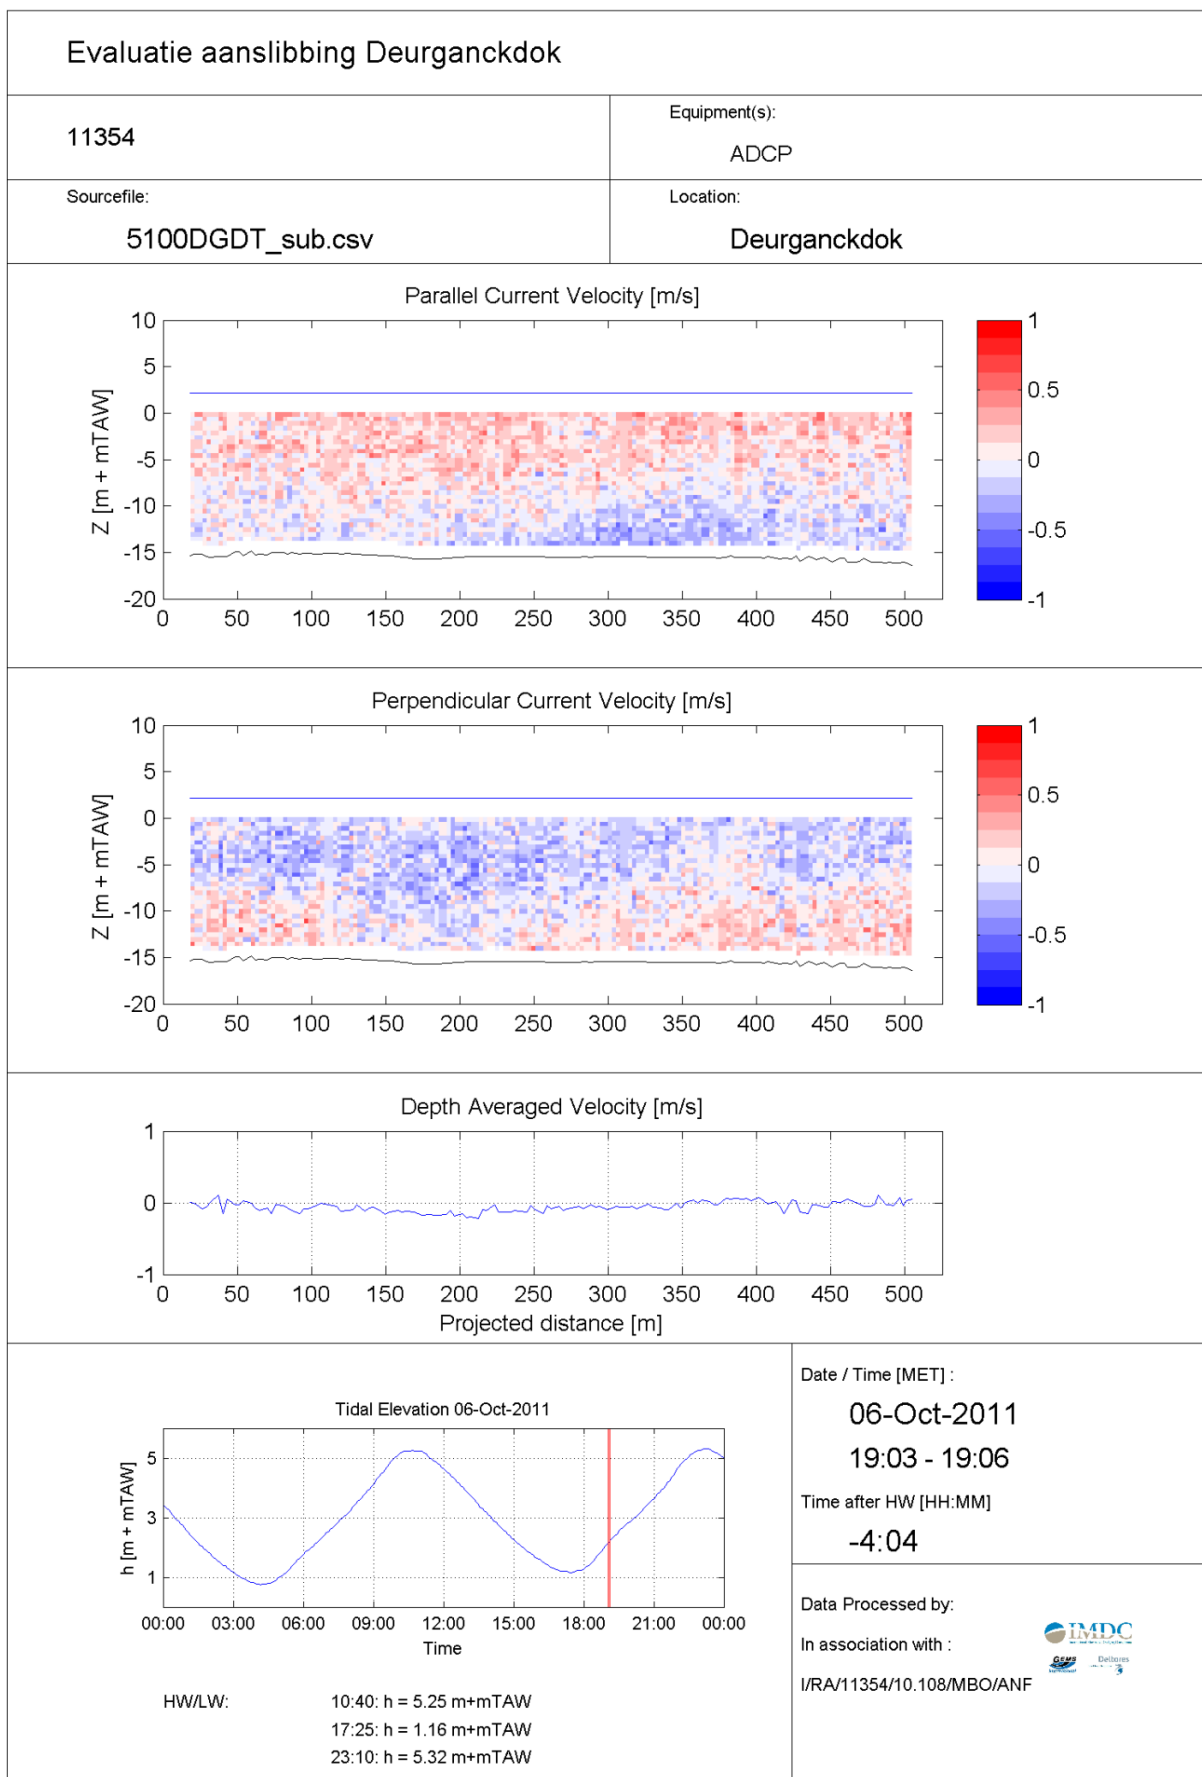


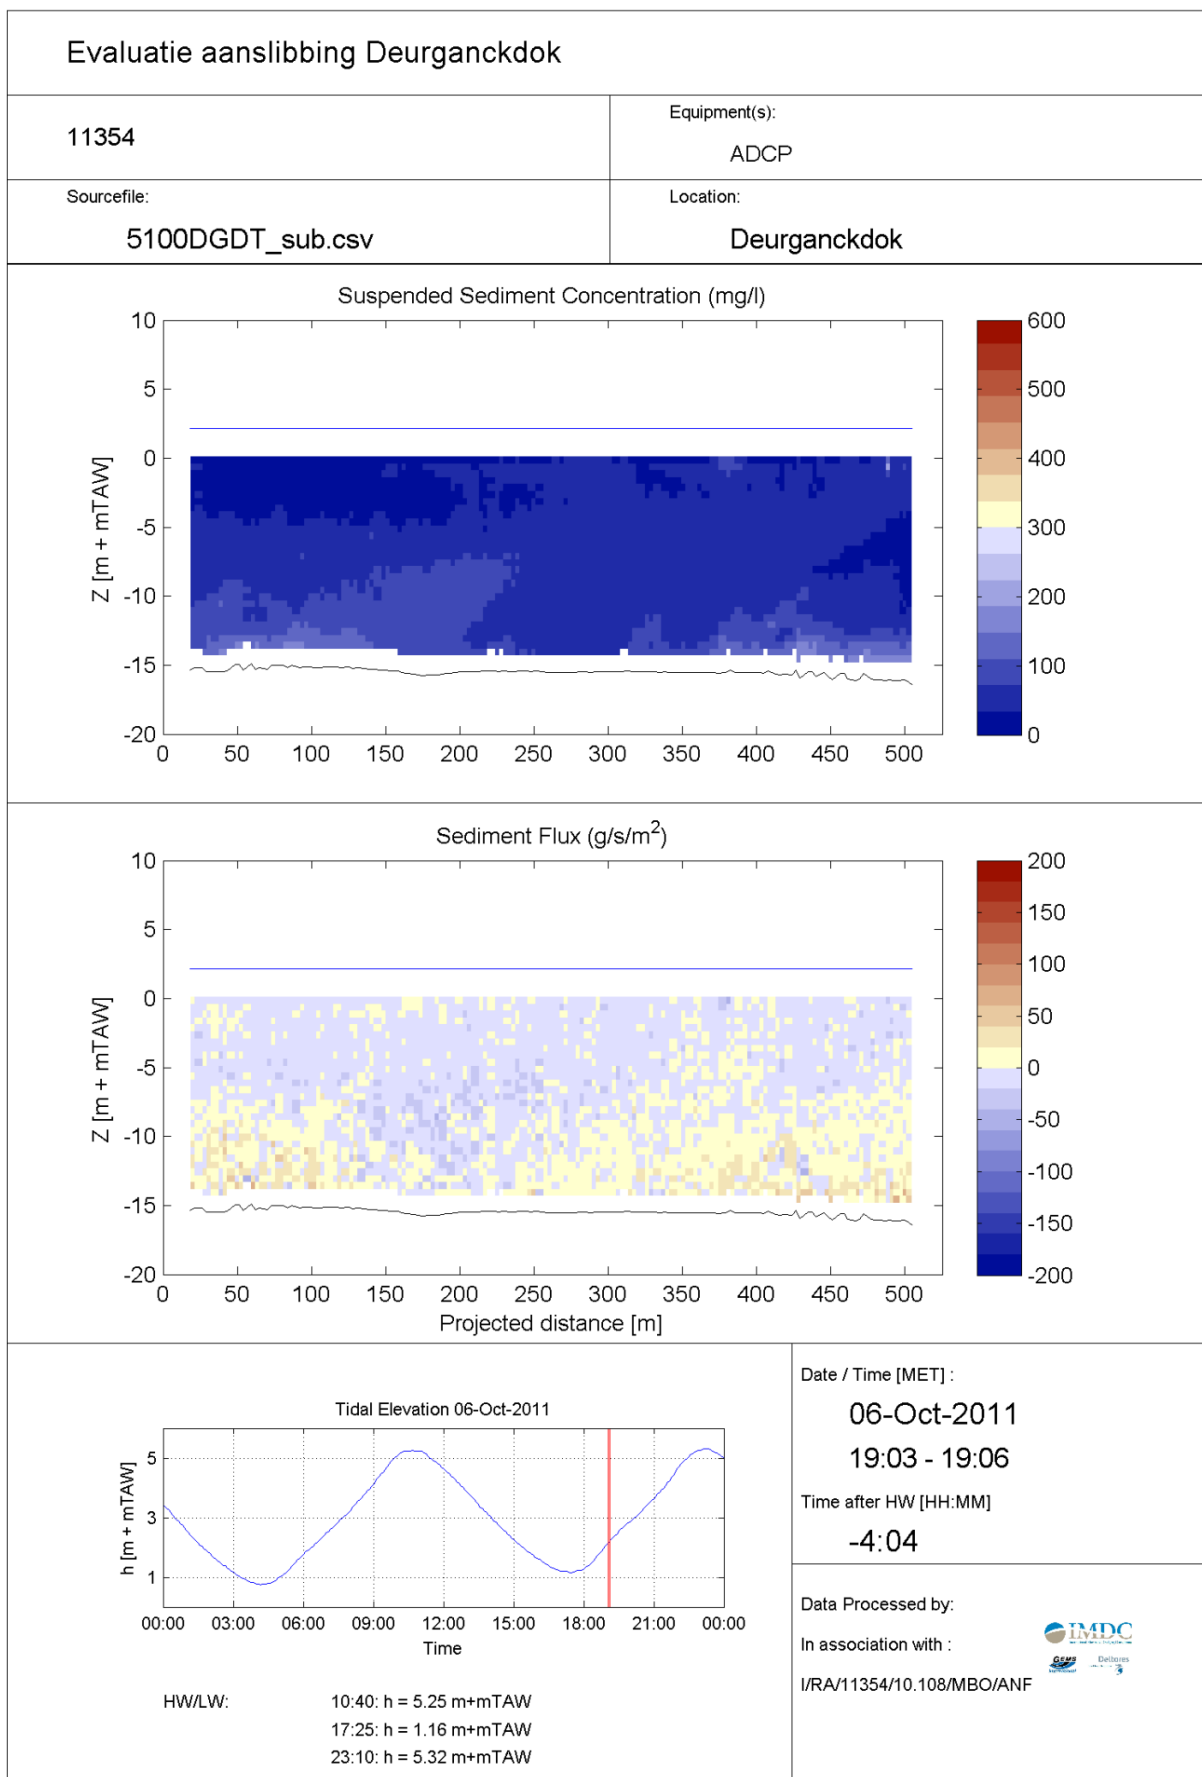


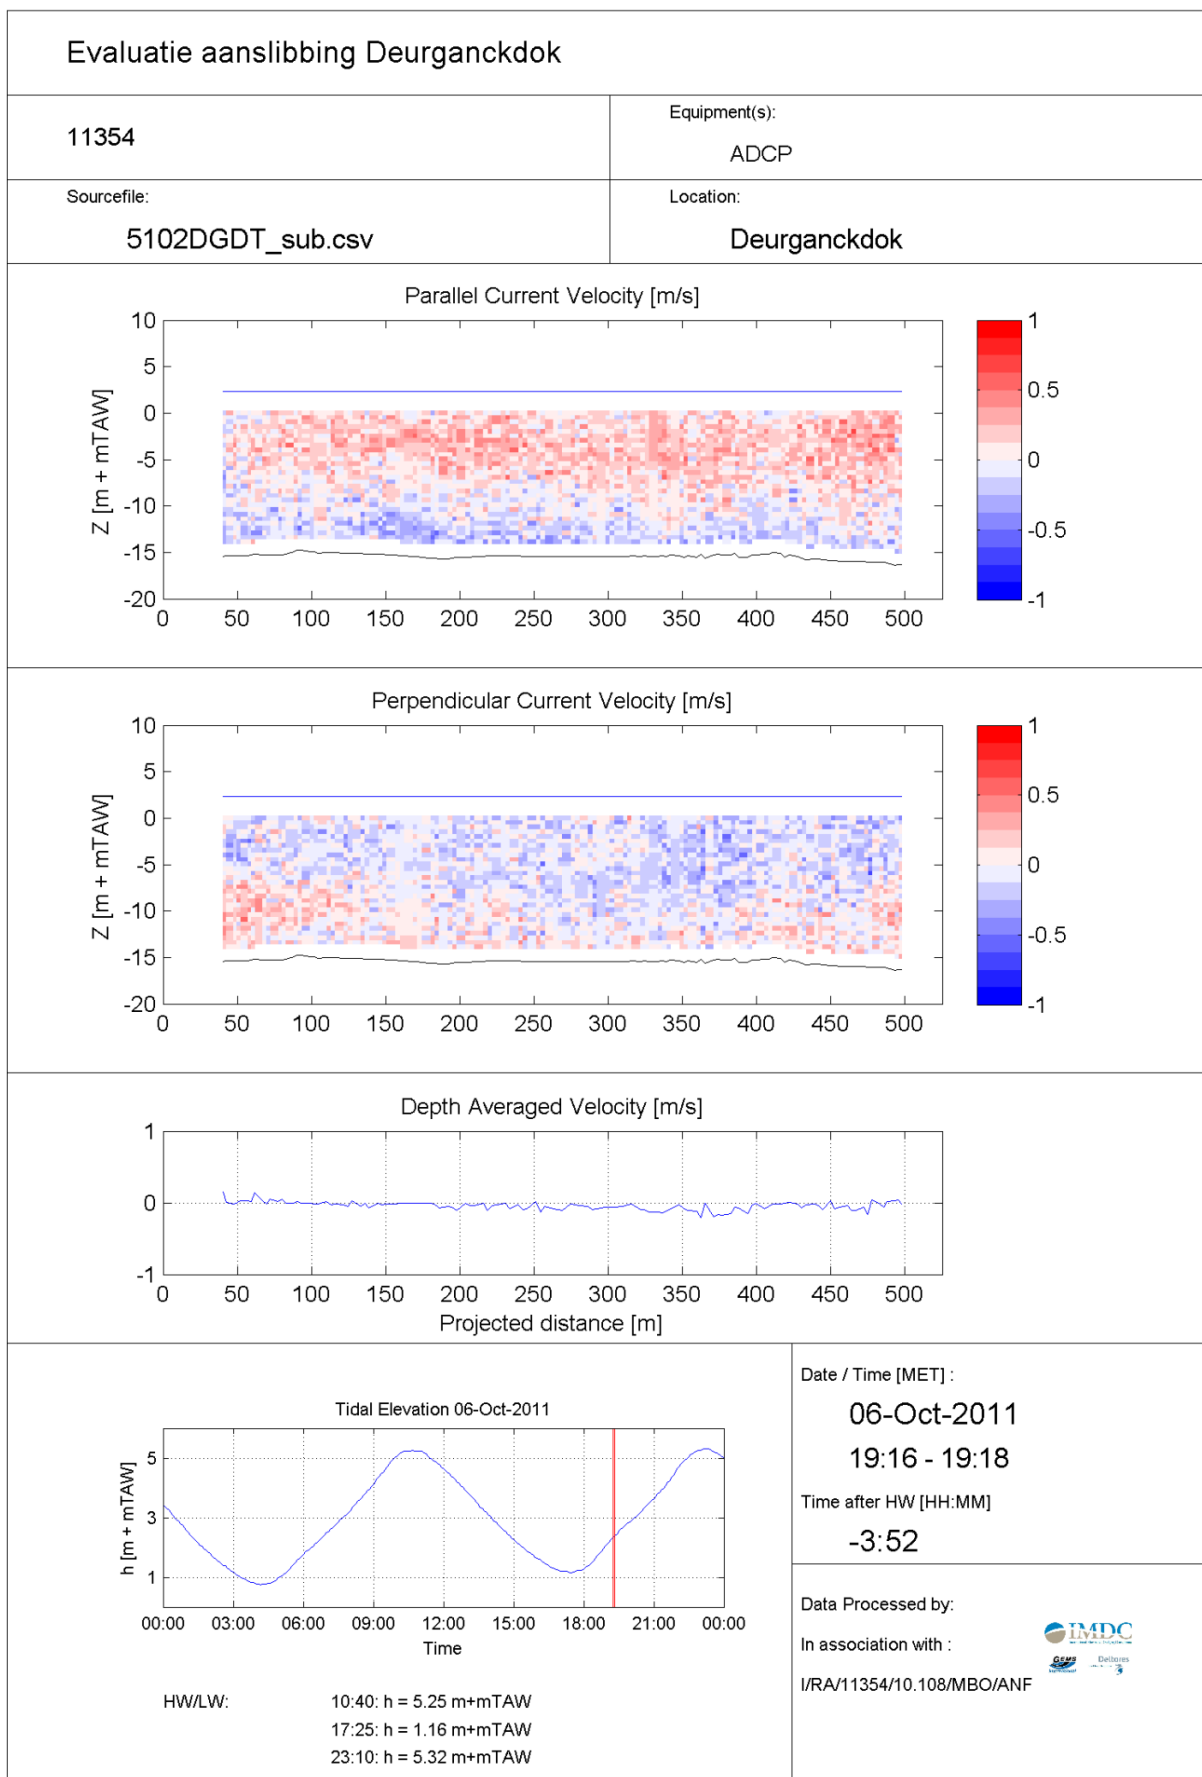


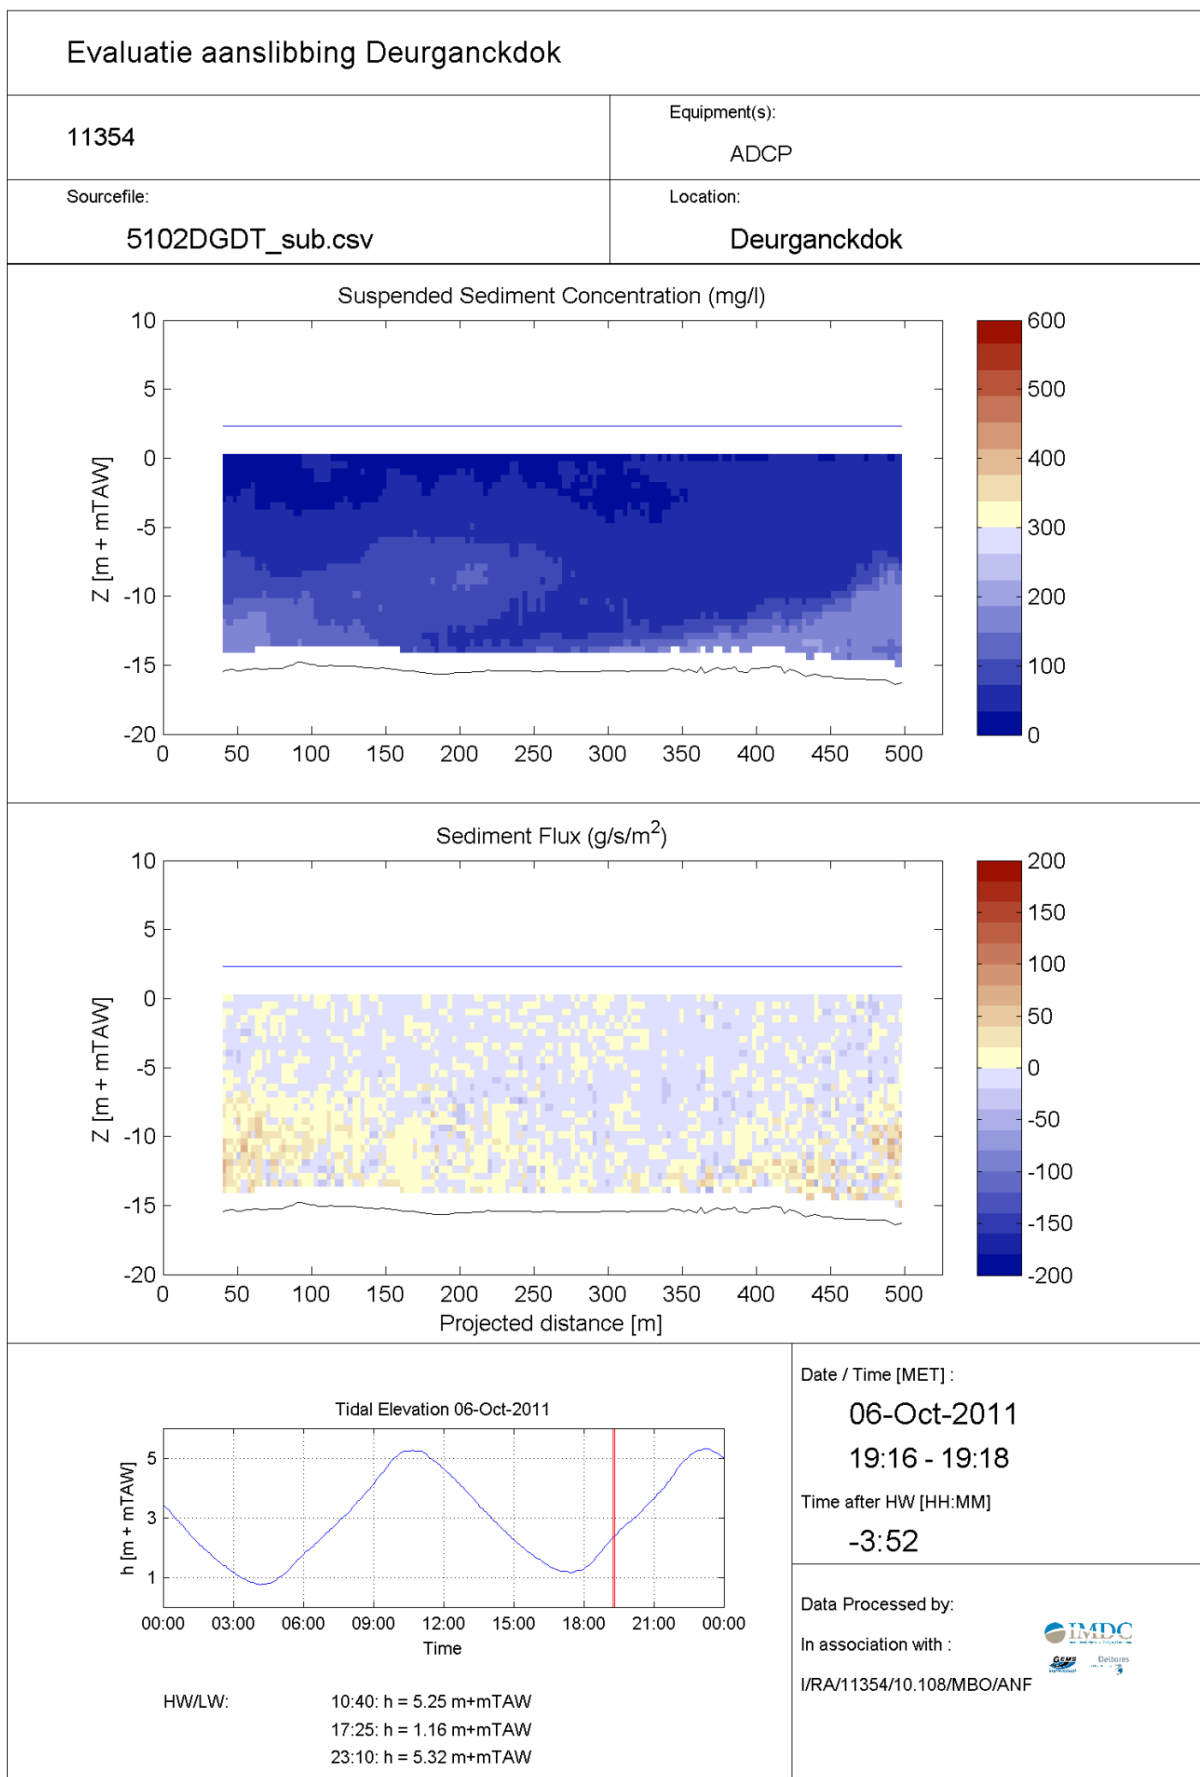

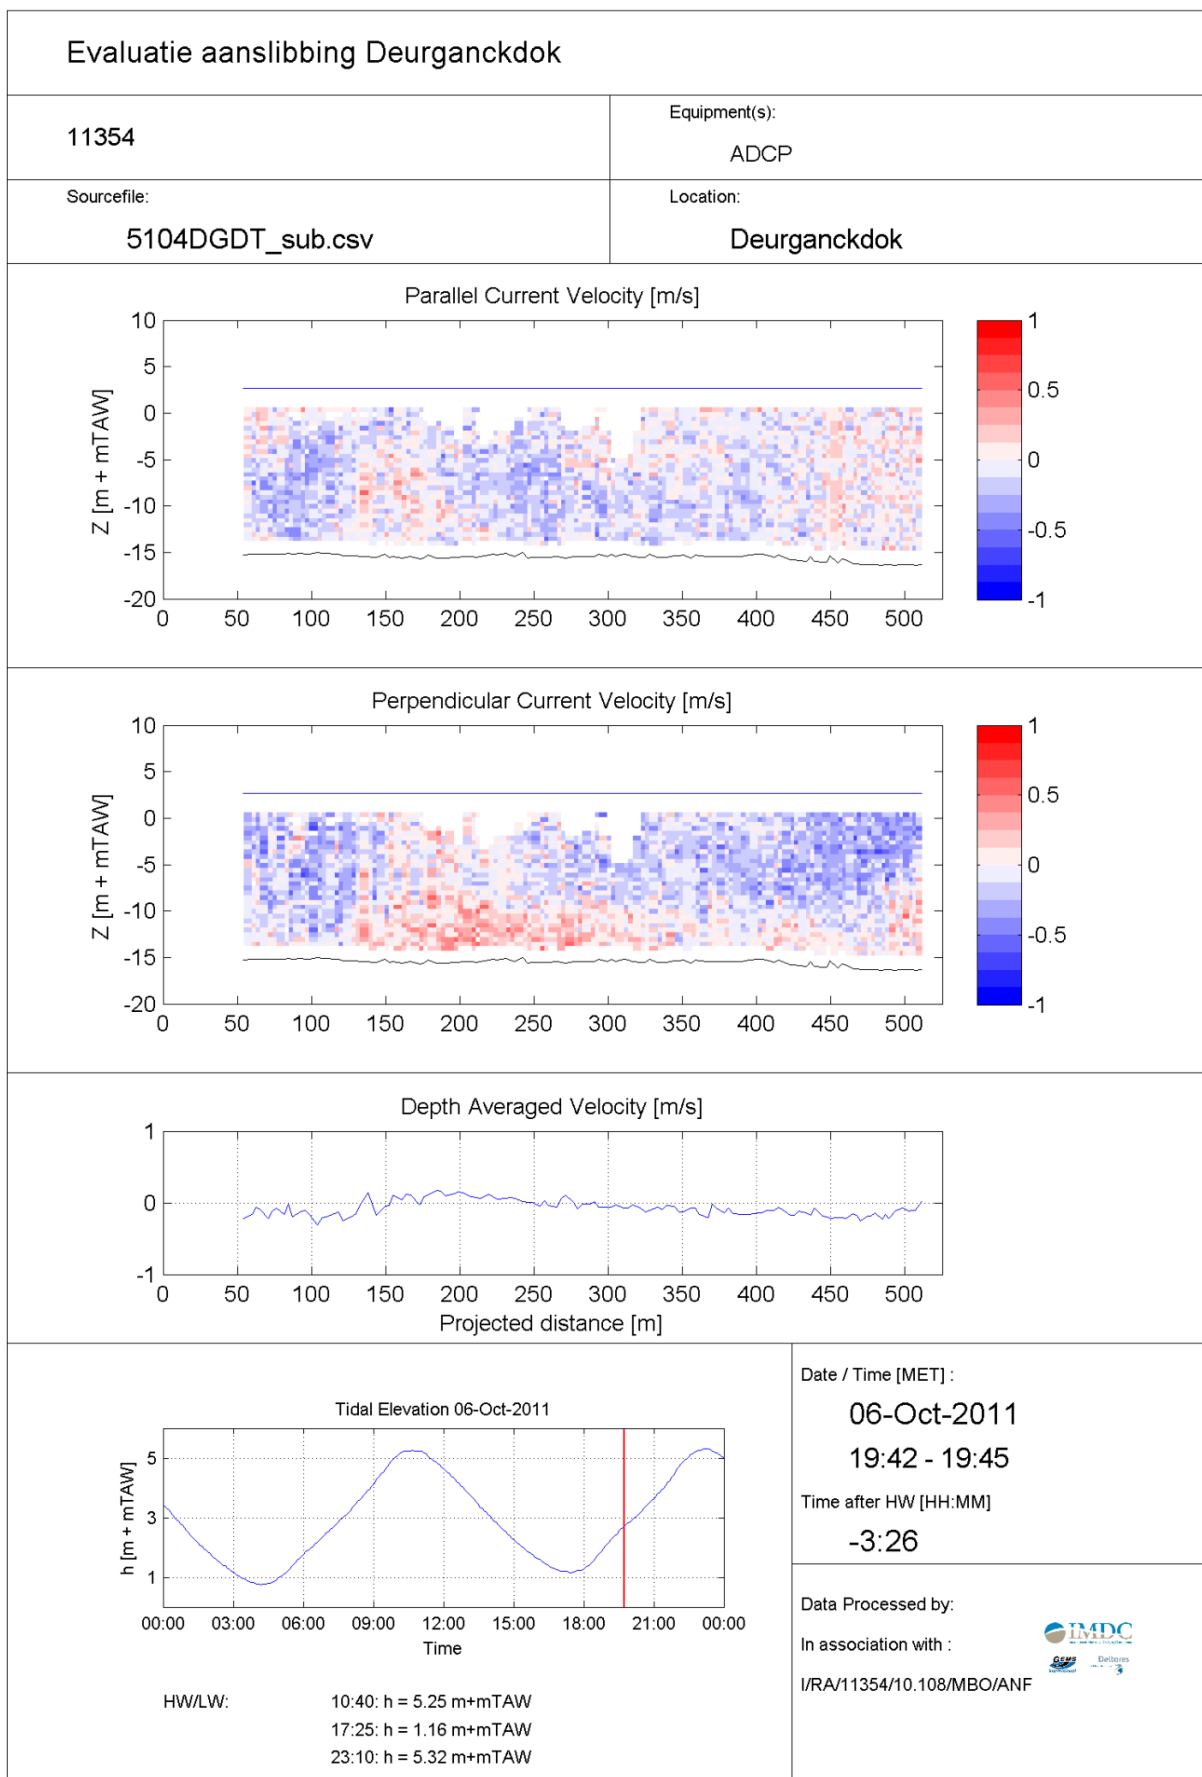

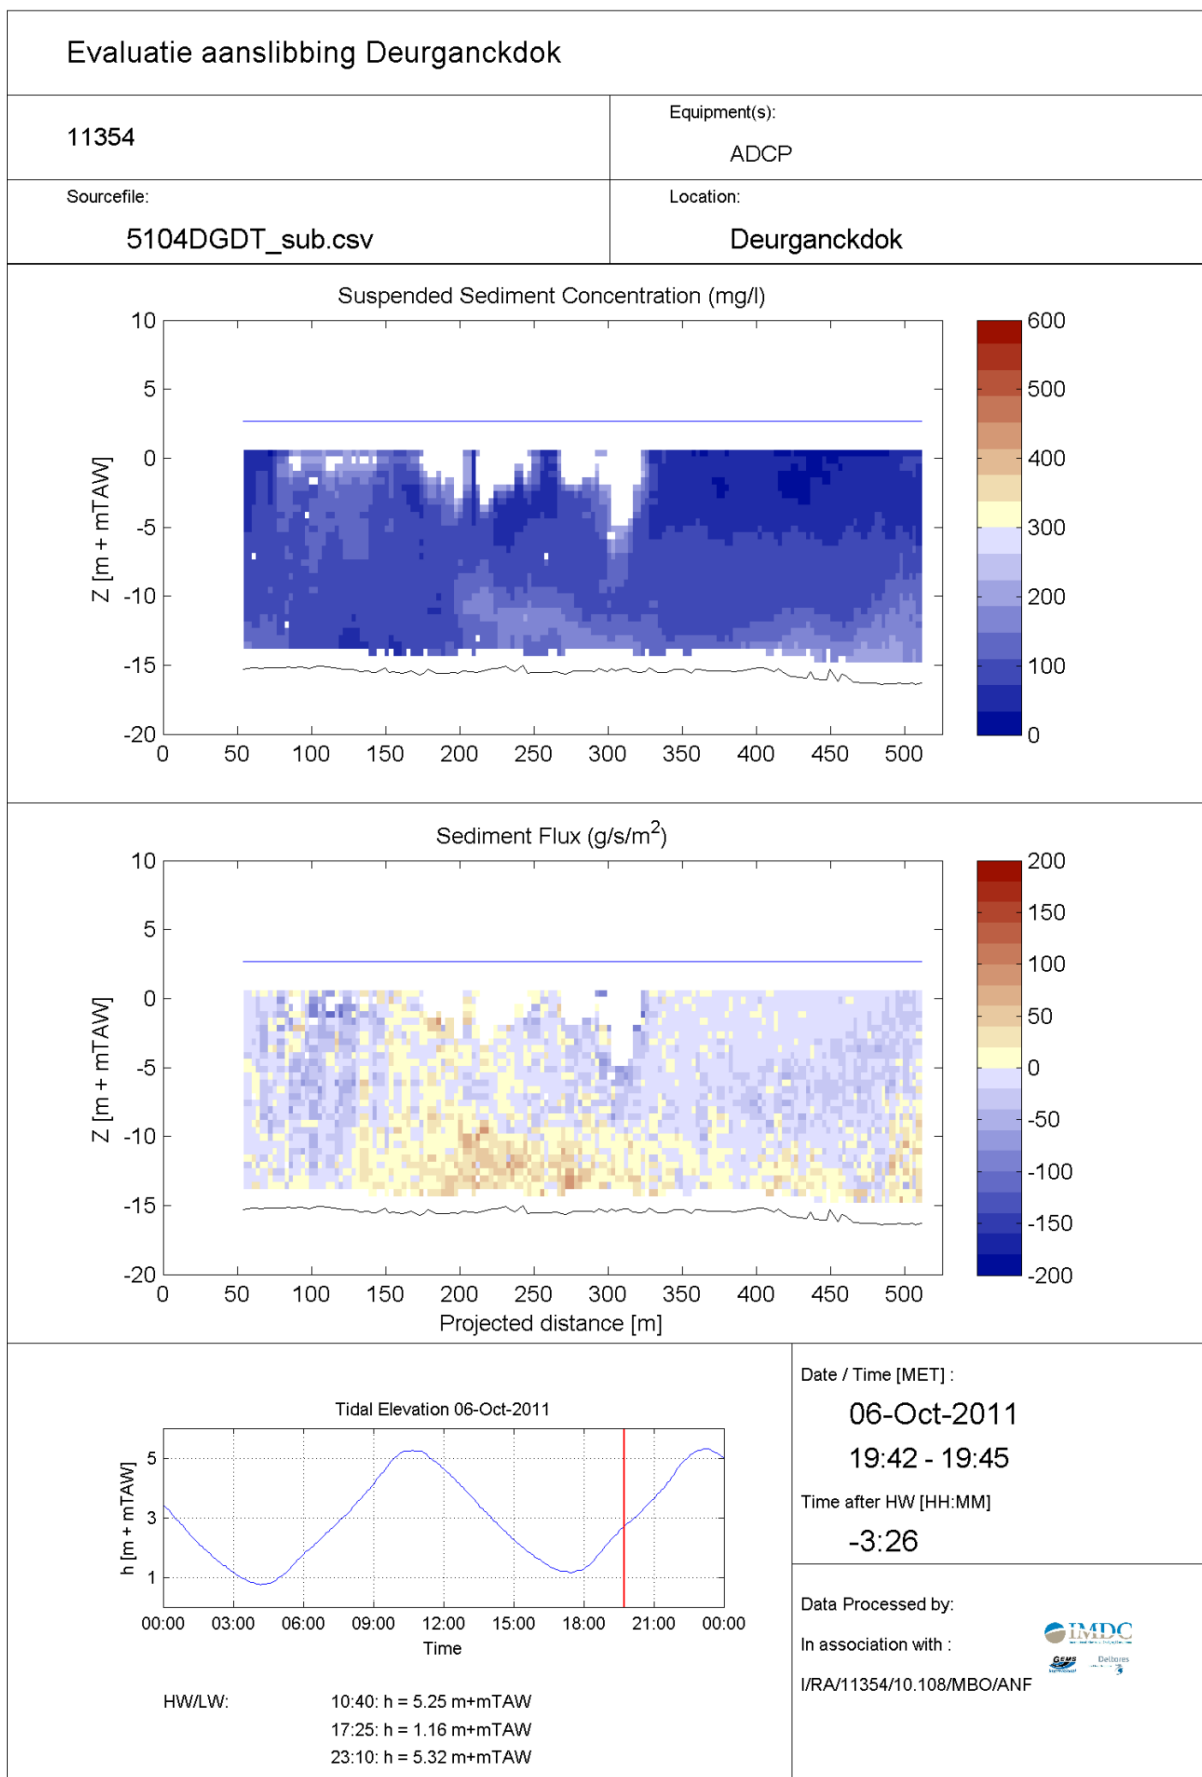

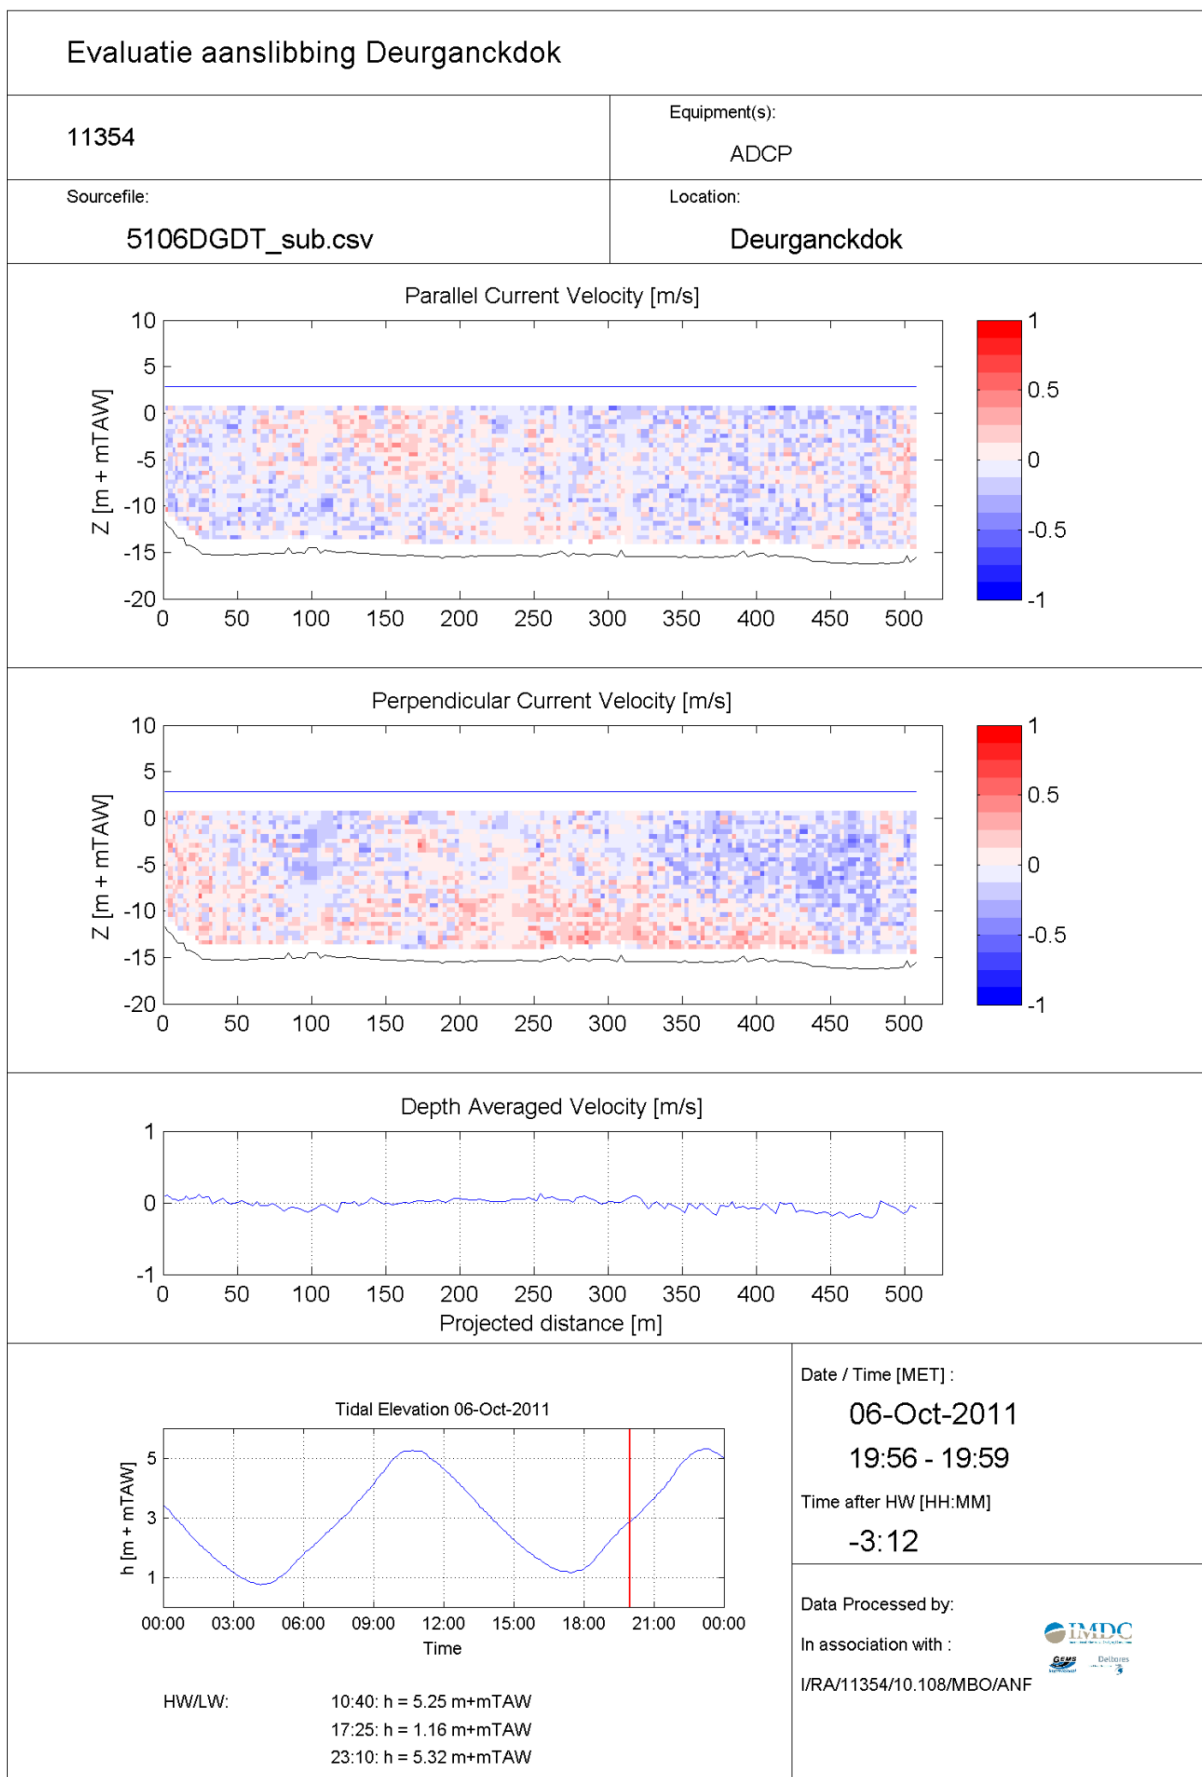

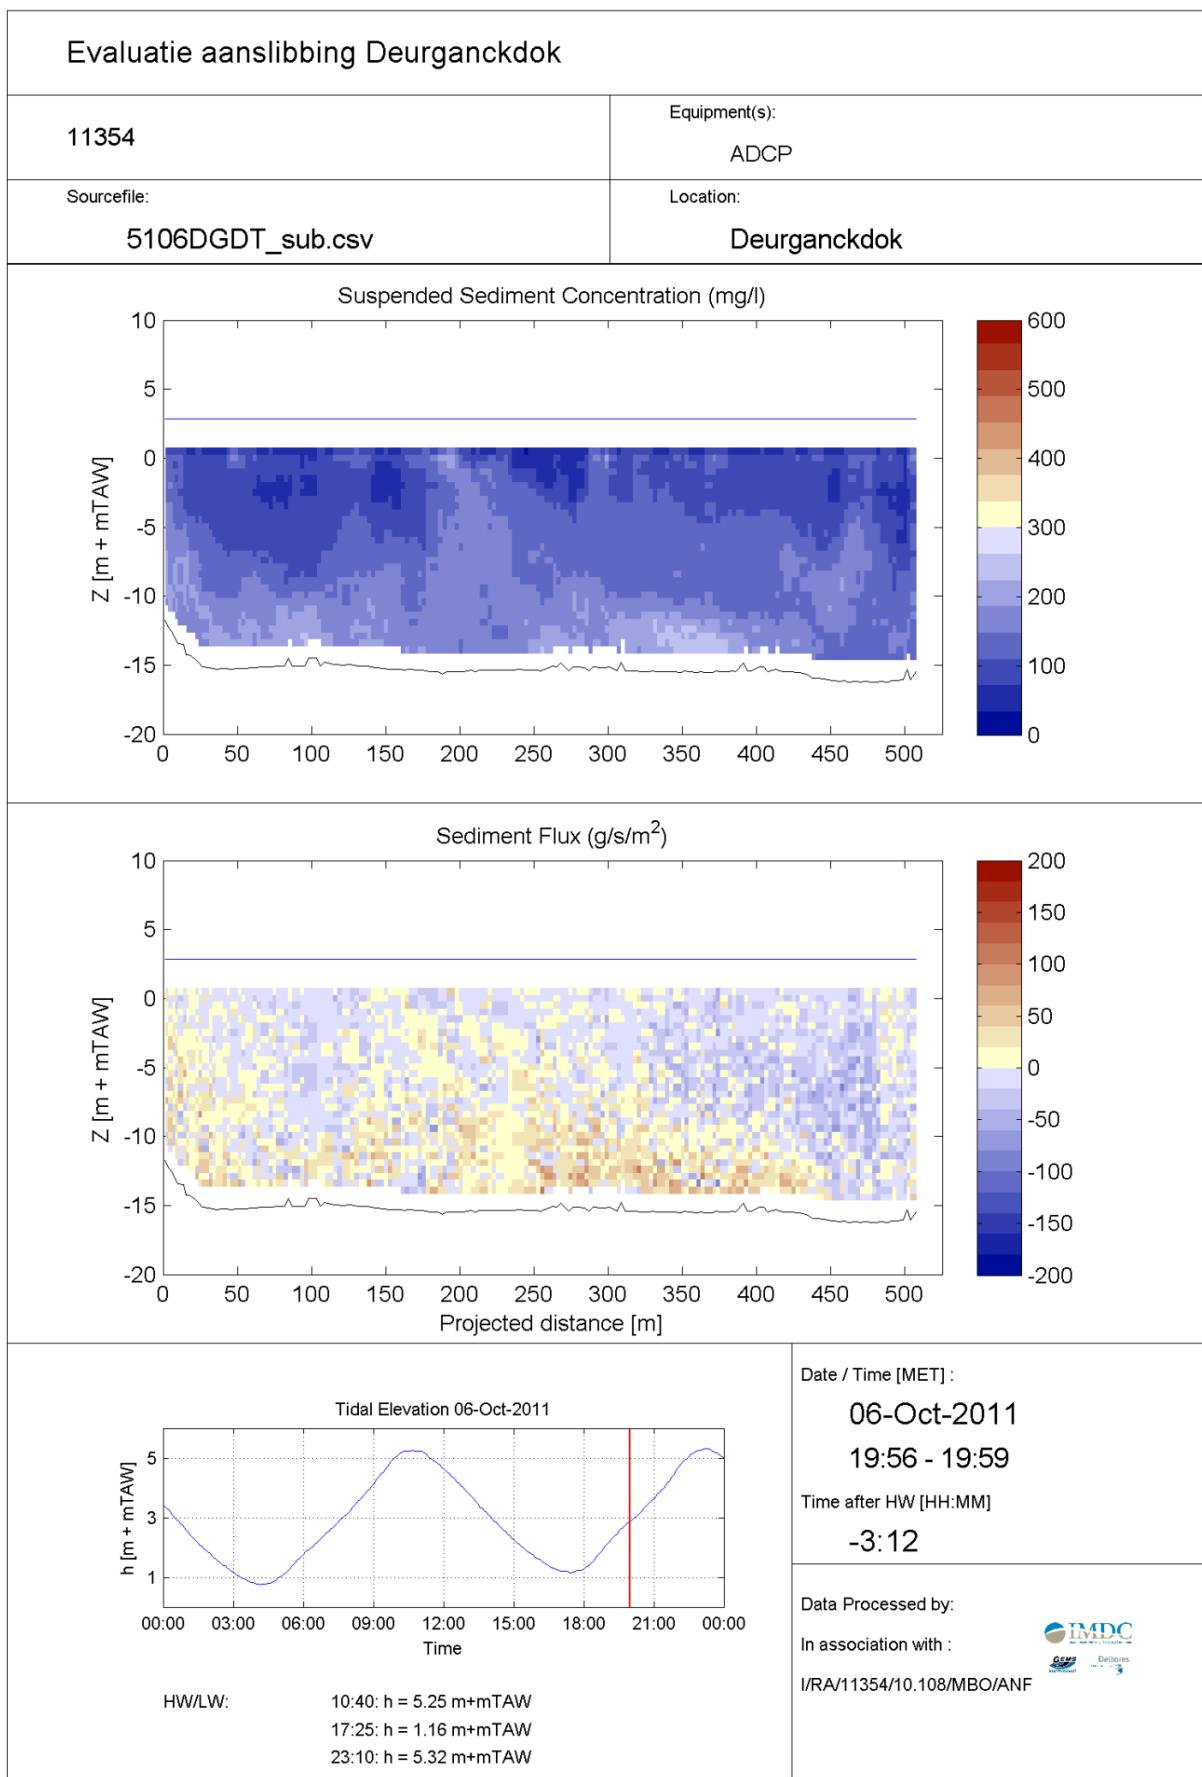

Annex G Discharge, sediment flux and average sediment concentration for the total cross-section

G.1 Discharge distribution over the cross section: positive is from dock to river

Filename	Time after HW [hh:mm]	Time [hh:mm]	Qmid [m3/s]	Qtop [m3/s]	Qbot [m3/s]	Qleft [m3/s]	Qright [m3/s]	Qtot [m3/s]	QVolBal [m3/s]
5001DGDGDT_sub.csv	-3:15	7:24	-414	-49	79	50	-34	-367	-251
5002DGDGDT_sub.csv	-3:12	7:27	-209	4	70	4	-39	-223	-205
5003DGDGDT_sub.csv	-3:09	7:30	-343	-10	62	23	-19	-253	-226
5004DGDGDT_sub.csv	-3:05	7:34	-206	8	47	3	-51	-249	-225
5005DGDGDT_sub.csv	-3:01	7:38	-399	28	32	6	-81	-359	-204
5006DGDGDT_sub.csv	-2:58	7:41	-292	22	30	2	-61	-334	-204
5008DGDGDT_sub.csv	-2:46	7:53	-324	38	8	15	-134	-337	-242
5009DGDGDT_sub.csv	-2:43	7:56	-151	69	21	0	-76	-206	-265
5011DGDGDT_sub.csv	-2:33	8:06	-304	80	-7	5	-68	-259	-257
5013DGDGDT_sub.csv	-2:18	8:21	-266	78	-37	9	-27	-251	-208
5015DGDGDT_sub.csv	-2:00	8:39	-302	71	-2	23	-25	-225	-272
5017DGDGDT_sub.csv	-1:47	8:52	-199	45	-8	14	-16	-254	-269
5019DGDGDT_sub.csv	-1:32	9:07	-578	49	-59	6	-47	-476	-304
5021DGDGDT_sub.csv	-1:13	9:26	-216	113	-43	1	-24	-273	-258
5023DGDGDT_sub.csv	-1:01	9:38	-364	113	-56	14	-36	-210	-366
5025DGDGDT_sub.csv	-0:46	9:53	171	203	-104	1	-46	62	-158
5027DGDGDT_sub.csv	-0:34	10:05	-223	145	-84	3	-39	-64	-188

Filename	Time after HW [hh:mm]	Time [hh:mm]	Qmid [m3/s]	Qtop [m3/s]	Qbot [m3/s]	Qleft [m3/s]	Qright [m3/s]	Qtot [m3/s]	QVolBal [m3/s]
5029DGDGDT_sub.csv	-0:04	10:35	138	267	-180	3	-39	117	-24
5031DGDGDT_sub.csv	0:07	10:47	-12	254	-112	48	-33	123	-30
5033DGDGDT_sub.csv	0:17	10:57	-78	220	-162	2	-13	12	34
5035DGDGDT_sub.csv	0:26	11:06	-70	206	-68	7	-29	45	118
5037DGDGDT_sub.csv	0:41	11:21	29	236	-137	1	-12	98	244
5039DGDGDT_sub.csv	1:00	11:40	-166	290	-77	8	19	105	125
5041DGDGDT_sub.csv	1:14	11:54	17	265	-121	8	47	171	216
5043DGDGDT_sub.csv	1:27	12:07	-57	271	-161	3	33	148	206
5045DGDGDT_sub.csv	1:44	12:24	71	240	-63	-1	74	271	204
5047DGDGDT_sub.csv	1:58	12:38	58	217	-54	-17	49	267	185
5049DGDGDT_sub.csv	2:12	12:52	72	226	-67	6	34	322	265
5051DGDGDT_sub.csv	2:25	13:05	263	148	76	106	2	465	248
5052DGDGDT_sub.csv	2:32	13:12	54	151	-83	-17	33	252	270
5054DGDGDT_sub.csv	2:40	13:20	174	169	-58	-2	78	276	255
5056DGDGDT_sub.csv	2:57	13:37	-30	138	-19	-25	7	139	142
5058DGDGDT_sub.csv	3:11	13:51	40	137	-38	-2	53	166	223
5060DGDGDT_sub.csv	3:29	14:09	23	168	-36	-4	17	185	224
5062DGDGDT_sub.csv	3:37	14:17	72	172	-24	-1	37	226	270
5064DGDGDT_sub.csv	3:59	14:39	12	115	19	0	22	200	180

Filename	Time after HW [hh:mm]	Time [hh:mm]	Qmid [m3/s]	Qtop [m3/s]	Qbot [m3/s]	Qleft [m3/s]	Qright [m3/s]	Qtot [m3/s]	QVolBal [m3/s]
5066DGDGDT_sub.csv	4:12	14:52	130	118	-8	-3	35	235	268
5068DGDGDT_sub.csv	4:29	15:09	45	83	7	-8	27	179	170
5070DGDGDT_sub.csv	4:41	15:21	72	53	13	-3	52	170	147
5072DGDGDT_sub.csv	4:57	15:37	62	45	28	-13	-2	130	169
5074DGDGDT_sub.csv	5:13	15:53	8	27	26	-5	55	115	205
5076DGDGDT_sub.csv	5:26	16:06	97	-12	66	-39	10	122	102
5078DGDGDT_sub.csv	5:40	16:20	84	-17	52	-2	19	118	136
5080DGDGDT_sub.csv	5:58	16:38	19	-77	100	-6	5	83	128
5082DGDGDT_sub.csv	6:12	16:52	126	-119	115	-6	77	133	102
5084DGDGDT_sub.csv	6:29	17:09	1	-171	104	-16	65	22	11
5086DGDGDT_sub.csv	6:41	17:21	35	-147	88	-4	37	-9	77
5088DGDGDT_sub.csv	-5:31	17:38	-47	-143	108	-14	27	-15	-68
5090DGDGDT_sub.csv	-5:19	17:50	139	-105	122	-22	47	79	-15
5092DGDGDT_sub.csv	-5:03	18:06	-137	-137	96	-26	24	-124	-122
5094DGDGDT_sub.csv	-4:56	18:13	-201	-151	104	-8	51	-208	-170
5096DGDGDT_sub.csv	-4:45	18:23	-210	-169	111	-4	28	-313	-272
5098DGDGDT_sub.csv	-4:17-	18:52	-511	-162	4	9	-36	-583	-340
5100DGDGDT_sub.csv	-4:04	19:05	-404	-128	62	-8	9	-482	-295
5102DGDGDT_sub.csv	-3:52	19:17	-274	-97	29	22	2	-407	-138

Filename	Time after HW [hh:mm]	Time [hh:mm]	Qmid [m3/s]	Qtop [m3/s]	Qbot [m3/s]	Qleft [m3/s]	Qright [m3/s]	Qtot [m3/s]	QVolBal [m3/s]
5104DGDT_sub.csv	-3:26	19:43	-507	-127	79	-132	-14	-557	-200
5106DGDT_sub.csv	-3:12	19:58	-184	-80	63	1	-21	-221	-193

G.2 Sediment flux distribution over the cross section: positive is from dock to river

Filename	Time to HW [hh:mm]	Time [hh:mm]	Fmid [kg/s]	Ftop [kg/s]	Fbot [kg/s]	Fleft [kg/s]	Fright [kg/s]	Ftot [kg/s]
5001DGGT_sub.csv	-3:15	7:24	-20.4	-3.5	12.5	4.4	-2.9	-10.0
5002DGGT_sub.csv	-3:12	7:27	-12.1	0.8	10.7	0.3	-3.1	-7.0
5003DGGT_sub.csv	-3:09	7:30	-27.0	-2.4	10.5	2.0	-1.6	-17.0
5004DGGT_sub.csv	-3:05	7:34	-25.4	0.1	6.9	0.3	-6.6	-30.0
5005DGGT_sub.csv	-3:01	7:38	-55.5	-1.4	4.3	0.5	-10.7	-54.1
5006DGGT_sub.csv	-2:58	7:41	-44.8	-0.3	3.6	0.1	-7.6	-53.2
5008DGGT_sub.csv	-2:46	7:53	-49.0	0.6	0.6	1.4	-14.3	-53.5
5009DGGT_sub.csv	-2:43	7:56	-30.1	3.9	3.8	0.0	-7.2	-37.5
5011DGGT_sub.csv	-2:33	8:06	-43.4	3.2	-0.4	0.6	-6.4	-43.5
5013DGGT_sub.csv	-2:18	8:21	-41.8	3.4	-6.4	1.0	-2.4	-42.4
5015DGGT_sub.csv	-2:00	8:39	-27.6	2.8	1.4	1.9	-1.7	-25.3
5017DGGT_sub.csv	-1:47	8:52	-16.2	1.6	0.1	2.9	-1.3	-20.3
5019DGGT_sub.csv	-1:32	9:07	-40.1	1.7	-5.8	0.2	-2.9	-37.2
5021DGGT_sub.csv	-1:13	9:26	-20.3	3.8	-4.2	0.0	-1.8	-28.1
5023DGGT_sub.csv	-1:01	9:38	-28.3	3.7	-5.5	0.8	-2.3	-31.5
5025DGGT_sub.csv	-0:46	9:53	-23.0	7.1	-17.8	0.1	-6.3	-40.1
5027DGGT_sub.csv	-0:34	10:05	-37.4	5.7	-11.6	0.2	-6.2	-40.7
5029DGGT_sub.csv	-0:04	10:35	1.9	10.3	-15.2	0.3	-4.6	-14.8
5031DGGT_sub.csv	0:07	10:47	-8.4	9.1	-11.4	4.0	-3.6	-8.8
5033DGGT_sub.csv	0:17	10:57	-4.7	11.7	-11.3	0.1	0.5	-6.8
5035DGGT_sub.csv	0:26	11:06	-13.7	6.3	-5.1	0.6	-3.6	-15.3
5037DGGT_sub.csv	0:41	11:21	-16.5	5.8	-14.6	0.1	-1.1	-26.8
5039DGGT_sub.csv	1:00	11:40	-34.2	6.6	-13.2	0.5	0.2	-34.2
5041DGGT_sub.csv	1:14	11:54	-14.2	5.1	-9.7	0.4	-0.3	-21.8
5043DGGT_sub.csv	1:27	12:07	-13.1	6.5	-9.8	0.1	0.8	-14.3
5045DGGT_sub.csv	1:44	12:24	-6.4	3.8	-3.4	-0.1	1.5	-5.2
5047DGGT_sub.csv	1:58	12:38	-2.9	8.0	-3.4	-0.8	2.1	1.2
5049DGGT_sub.csv	2:12	12:52	-4.8	6.5	-3.6	0.2	1.5	0.1
5051DGGT_sub.csv	2:25	13:05	1.3	2.4	1.6	-6.7	0.1	-2.4

Filename	Time to HW [hh:mm]	Time [hh:mm]	Fmid [kg/s]	Ftop [kg/s]	Fbot [kg/s]	Fleft [kg/s]	Fright [kg/s]	Ftot [kg/s]
5052DGGDT_sub.csv	2:32	13:12	-6.5	3.5	-5.3	-0.7	0.6	-6.0
5054DGGDT_sub.csv	2:40	13:20	-3.0	3.1	-3.0	-0.1	1.8	-2.8
5056DGGDT_sub.csv	2:57	13:37	-5.4	3.4	-1.9	-0.9	1.2	-3.3
5058DGGDT_sub.csv	3:11	13:51	-5.9	2.6	-2.1	0.0	1.0	-3.9
5060DGGDT_sub.csv	3:29	14:09	-3.3	3.0	-1.7	-0.1	0.2	-2.1
5062DGGDT_sub.csv	3:37	14:17	-2.9	3.1	-1.5	0.0	0.6	-0.8
5064DGGDT_sub.csv	3:59	14:39	-2.5	2.4	-0.5	-0.1	0.4	0.0
5066DGGDT_sub.csv	4:12	14:52	0.0	2.1	-0.6	-0.1	0.4	1.1
5068DGGDT_sub.csv	4:29	15:09	-0.9	1.0	-0.2	-0.2	0.3	0.8
5070DGGDT_sub.csv	4:41	15:21	0.3	0.9	0.2	-0.1	1.3	1.8
5072DGGDT_sub.csv	4:57	15:37	-0.6	0.5	0.9	-0.6	0.0	-0.7
5074DGGDT_sub.csv	5:13	15:53	-9.8	0.2	0.6	-0.4	1.3	-7.1
5076DGGDT_sub.csv	5:26	16:06	-6.4	-4.5	3.6	-3.6	0.5	-9.4
5078DGGDT_sub.csv	5:40	16:20	-5.7	-4.6	2.6	-0.1	0.7	-9.3
5080DGGDT_sub.csv	5:58	16:38	-14.2	-7.9	5.9	-0.7	0.2	-13.3
5082DGGDT_sub.csv	6:12	16:52	-2.7	-10.2	6.3	-0.7	1.9	-9.0
5084DGGDT_sub.csv	6:29	17:09	-8.7	-13.8	6.6	-0.8	1.1	-13.0
5086DGGDT_sub.csv	6:41	17:21	-4.8	-11.9	5.5	-0.2	1.0	-11.1
5088DGGDT_sub.csv	-5:31	17:38	-7.1	-10.9	8.3	-0.9	0.9	-6.3
5090DGGDT_sub.csv	-5:19	17:50	7.6	-9.5	12.1	-1.1	2.0	4.2
5092DGGDT_sub.csv	-5:03	18:06	-7.7	-8.3	6.7	-1.2	0.9	-7.0
5094DGGDT_sub.csv	-4:56	18:13	-12.8	-10.9	7.6	-0.4	2.0	-14.0
5096DGGDT_sub.csv	-4:45	18:23	-14.4	-12.2	9.1	-0.2	1.3	-19.2
5098DGGDT_sub.csv	-4:17-	18:52	-27.5	-8.3	1.2	0.9	-1.5	-27.7
5100DGGDT_sub.csv	-4:04	19:05	-13.3	-5.3	8.4	0.1	0.7	-11.5
5102DGGDT_sub.csv	-3:52	19:17	-5.7	-3.8	5.2	5.6	2.6	-6.9
5104DGGDT_sub.csv	-3:26	19:43	-38.3	-11.9	13.3	-9.9	-0.3	-31.3
5106DGGDT_sub.csv	-3:12	19:58	-8.6	-8.1	15.4	0.2	-2.1	-3.2


G.3 Sediment concentration distribution over the cross section

<i>Transect name</i>	<i>Time [hh:mm MET]</i>	<i>Time after HW [hh:mm]</i>	<i>Average measured SS Concentration [mg/l]</i>	<i>Average measured incoming SS Concentration [mg/l]</i>	<i>Average measured outgoing SS Concentration [mg/l]</i>
5001DGDGDT_sub.csv	-3:15	7:24	82	70	102
5002DGDGDT_sub.csv	-3:12	7:27	89	80	103
5003DGDGDT_sub.csv	-3:09	7:30	94	89	101
5004DGDGDT_sub.csv	-3:05	7:34	104	107	100
5005DGDGDT_sub.csv	-3:01	7:38	109	118	92
5006DGDGDT_sub.csv	-2:58	7:41	109	119	91
5008DGDGDT_sub.csv	-2:46	7:53	113	122	97
5009DGDGDT_sub.csv	-2:43	7:56	114	124	100
5011DGDGDT_sub.csv	-2:33	8:06	108	119	92
5013DGDGDT_sub.csv	-2:18	8:21	107	118	90
5015DGDGDT_sub.csv	-2:00	8:39	87	92	81
5017DGDGDT_sub.csv	-1:47	8:52	74	75	72
5019DGDGDT_sub.csv	-1:32	9:07	65	68	57
5021DGDGDT_sub.csv	-1:13	9:26	60	67	49
5023DGDGDT_sub.csv	-1:01	9:38	63	74	48
5025DGDGDT_sub.csv	-0:46	9:53	75	102	50
5027DGDGDT_sub.csv	-0:34	10:05	74	92	53
5029DGDGDT_sub.csv	-0:04	10:35	65	75	55
5031DGDGDT_sub.csv	0:07	10:47	61	69	54
5033DGDGDT_sub.csv	0:17	10:57	64	66	62
5035DGDGDT_sub.csv	0:26	11:06	59	68	51
5037DGDGDT_sub.csv	0:41	11:21	59	76	43
5039DGDGDT_sub.csv	1:00	11:40	52	71	34
5041DGDGDT_sub.csv	1:14	11:54	41	56	29
5043DGDGDT_sub.csv	1:27	12:07	35	44	27
5045DGDGDT_sub.csv	1:44	12:24	28	36	22
5047DGDGDT_sub.csv	1:58	12:38	35	41	31


<i>Transect name</i>	<i>Time [hh:mm MET]</i>	<i>Time after HW [hh:mm]</i>	<i>Average measured SS Concentration [mg/l]</i>	<i>Average measured incoming SS Concentration [mg/l]</i>	<i>Average measured outgoing SS Concentration [mg/l]</i>
5049DGGT_sub.csv	2:12	12:52	35	43	29
5051DGGT_sub.csv	2:25	13:05	32	46	24
5052DGGT_sub.csv	2:32	13:12	35	46	28
5054DGGT_sub.csv	2:40	13:20	34	42	30
5056DGGT_sub.csv	2:57	13:37	42	38	45
5058DGGT_sub.csv	3:11	13:51	30	34	26
5060DGGT_sub.csv	3:29	14:09	23	29	19
5062DGGT_sub.csv	3:37	14:17	26	32	22
5064DGGT_sub.csv	3:59	14:39	29	31	27
5066DGGT_sub.csv	4:12	14:52	23	26	21
5068DGGT_sub.csv	4:29	15:09	18	19	18
5070DGGT_sub.csv	4:41	15:21	25	23	26
5072DGGT_sub.csv	4:57	15:37	32	37	28
5074DGGT_sub.csv	5:13	15:53	44	58	34
5076DGGT_sub.csv	5:26	16:06	54	71	41
5078DGGT_sub.csv	5:40	16:20	60	77	47
5080DGGT_sub.csv	5:58	16:38	57	74	45
5082DGGT_sub.csv	6:12	16:52	63	81	50
5084DGGT_sub.csv	6:29	17:09	69	90	50
5086DGGT_sub.csv	6:41	17:21	64	75	53
5088DGGT_sub.csv	-5:31	17:38	67	72	61
5090DGGT_sub.csv	-5:19	17:50	74	76	73
5092DGGT_sub.csv	-5:03	18:06	77	75	79
5094DGGT_sub.csv	-4:56	18:13	65	65	65
5096DGGT_sub.csv	-4:45	18:23	66	65	67
5098DGGT_sub.csv	-4:17-	18:52	65	60	77
5100DGGT_sub.csv	-4:04	19:05	64	54	85
5102DGGT_sub.csv	-3:52	19:17	78	64	106
5104DGGT_sub.csv	-3:26	19:43	103	90	133
5106DGGT_sub.csv	-3:12	19:58	139	120	165

<i>Tide</i>	<i>Concentration [mg/l]</i>								
	<i>overall SSC</i>			<i>incoming SSC</i>			<i>outgoing SSC</i>		
	<i>min</i>	<i>average</i>	<i>max</i>	<i>min</i>	<i>average</i>	<i>max</i>	<i>min</i>	<i>average</i>	<i>max</i>
Flood	60	85	139	54	88	124	48	84	165
Eb	18	42	69	19	52	90	18	35	62


Annex H Temporal variation of total flux, total discharge and suspended sediment concentration

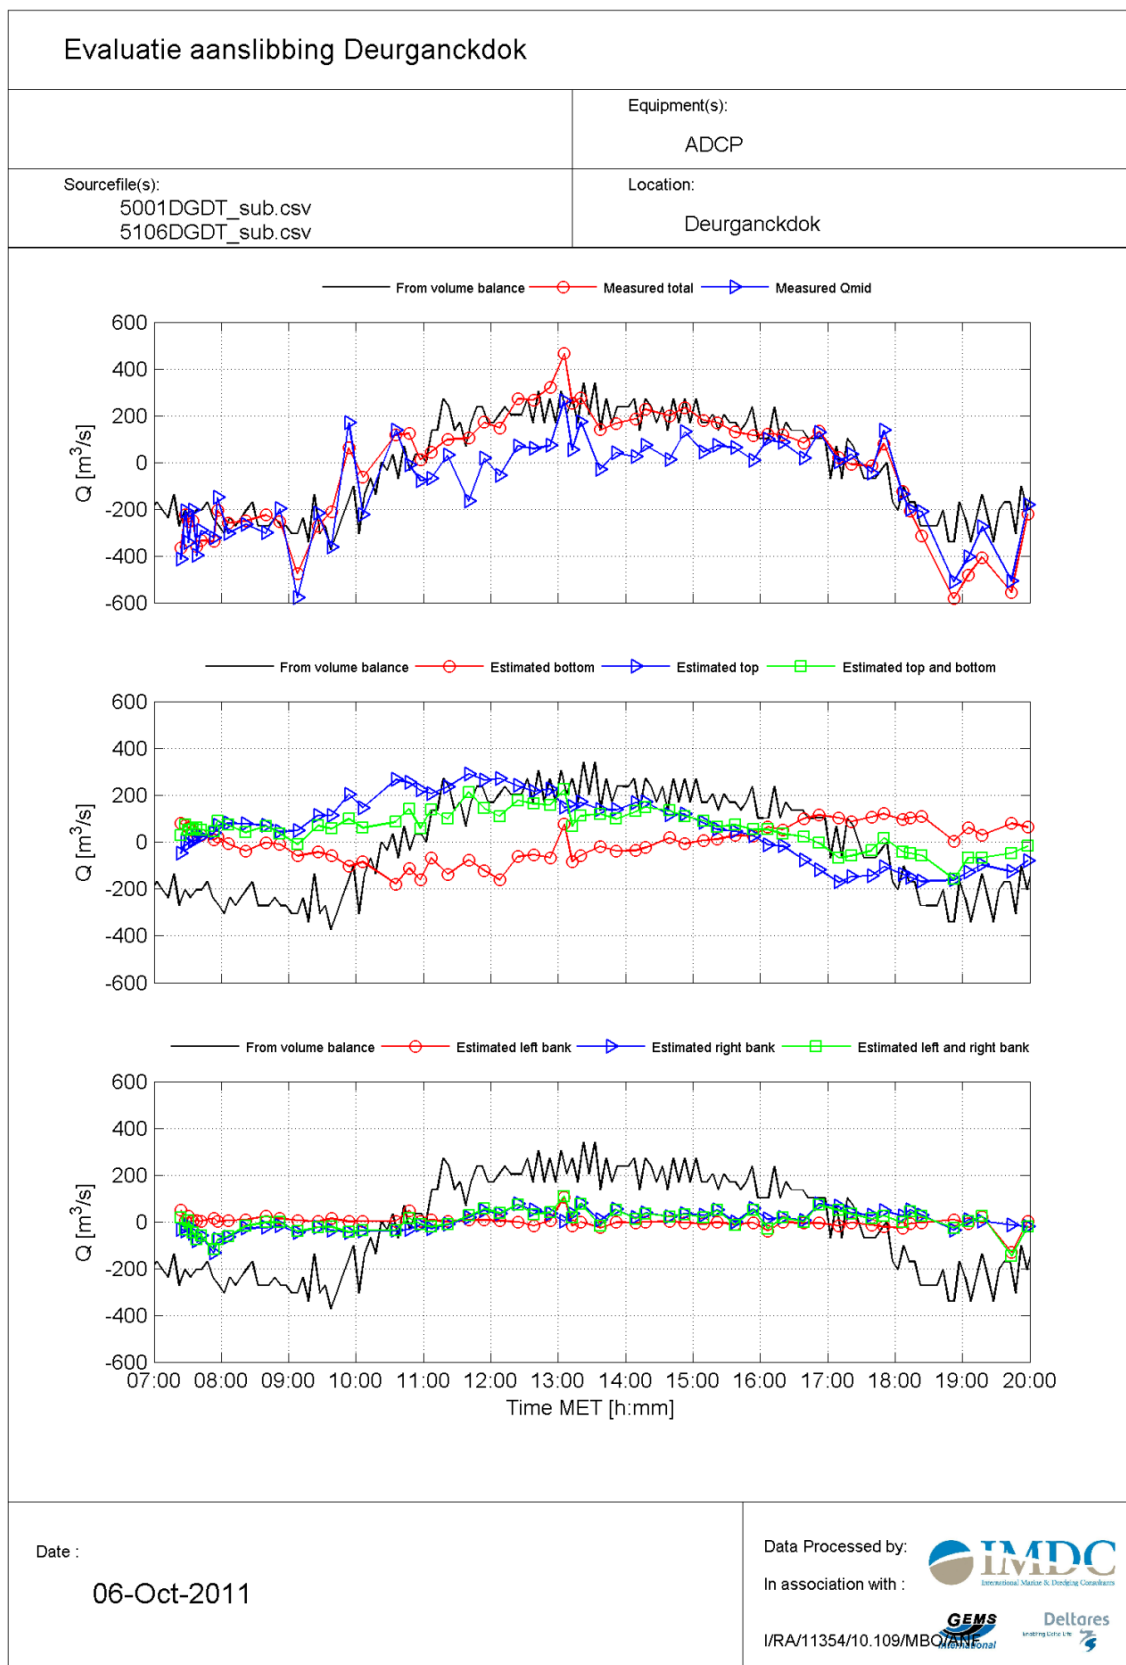

Annex Figure 8: Total discharge through the measured cross section, positive is from dock to river

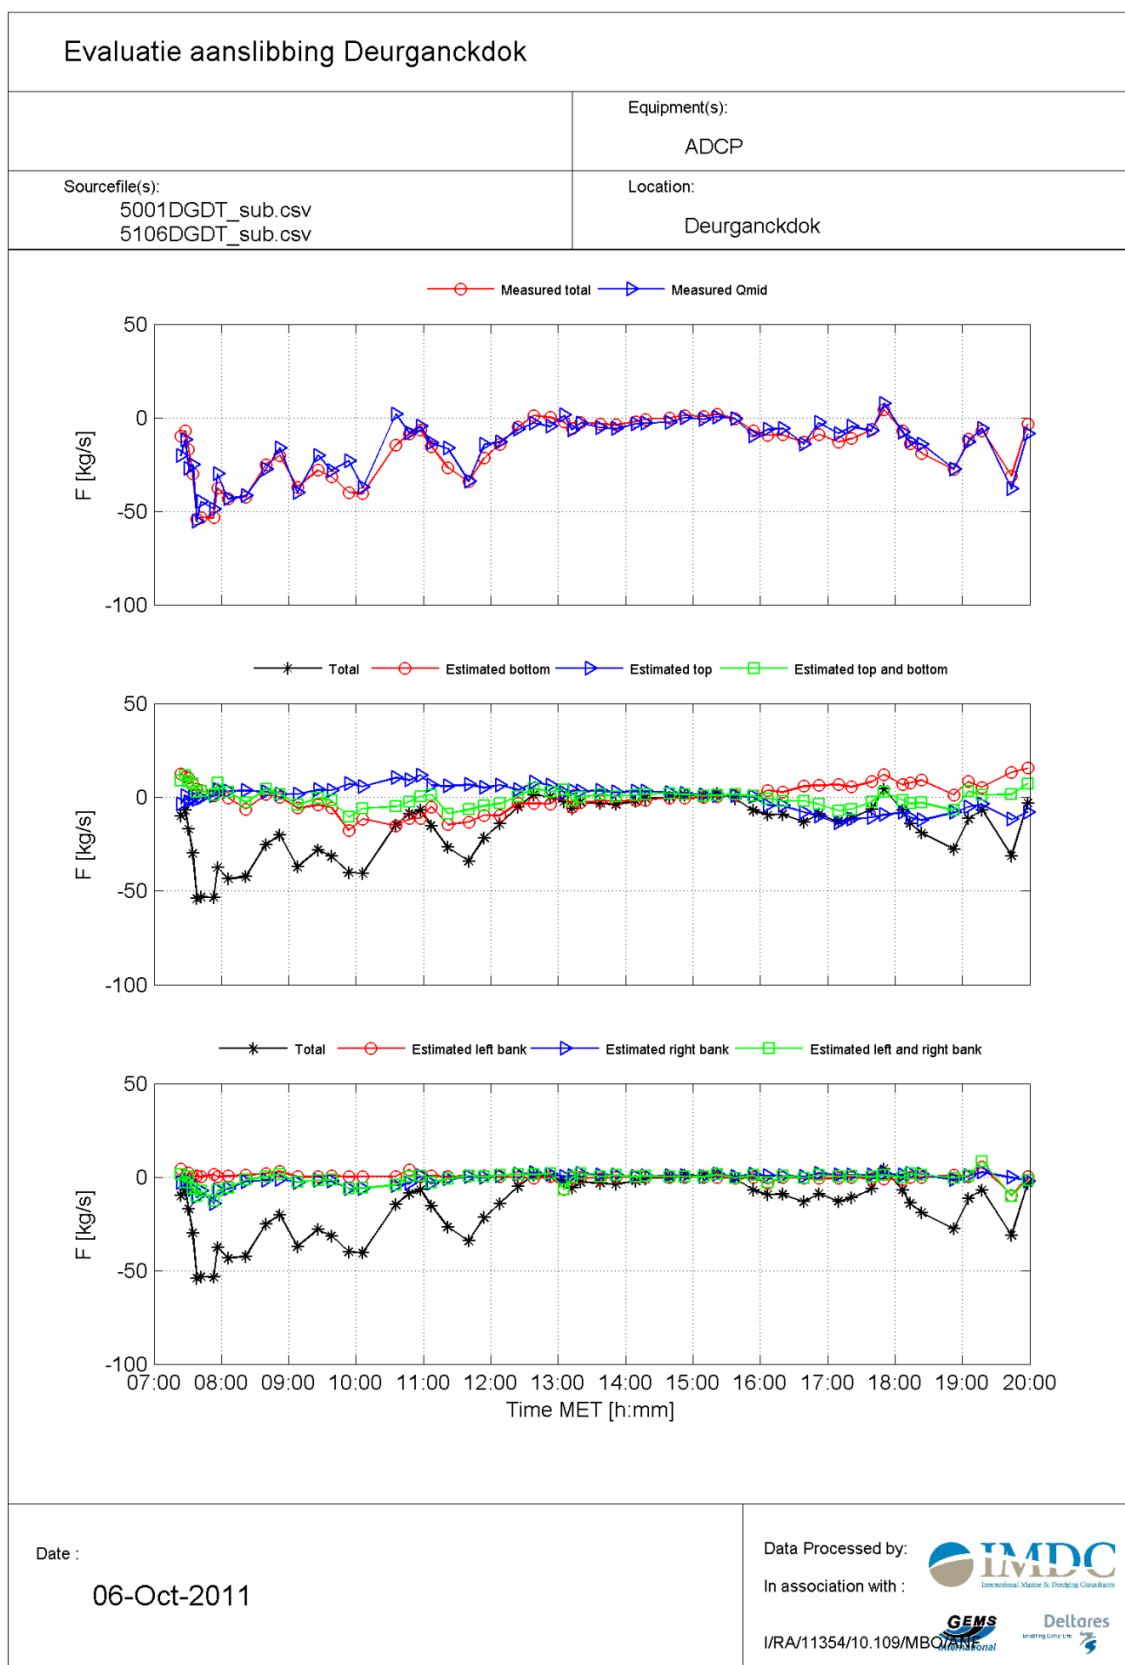

Annex Figure 9: Total flux through the measured cross section, positive is from dock to river

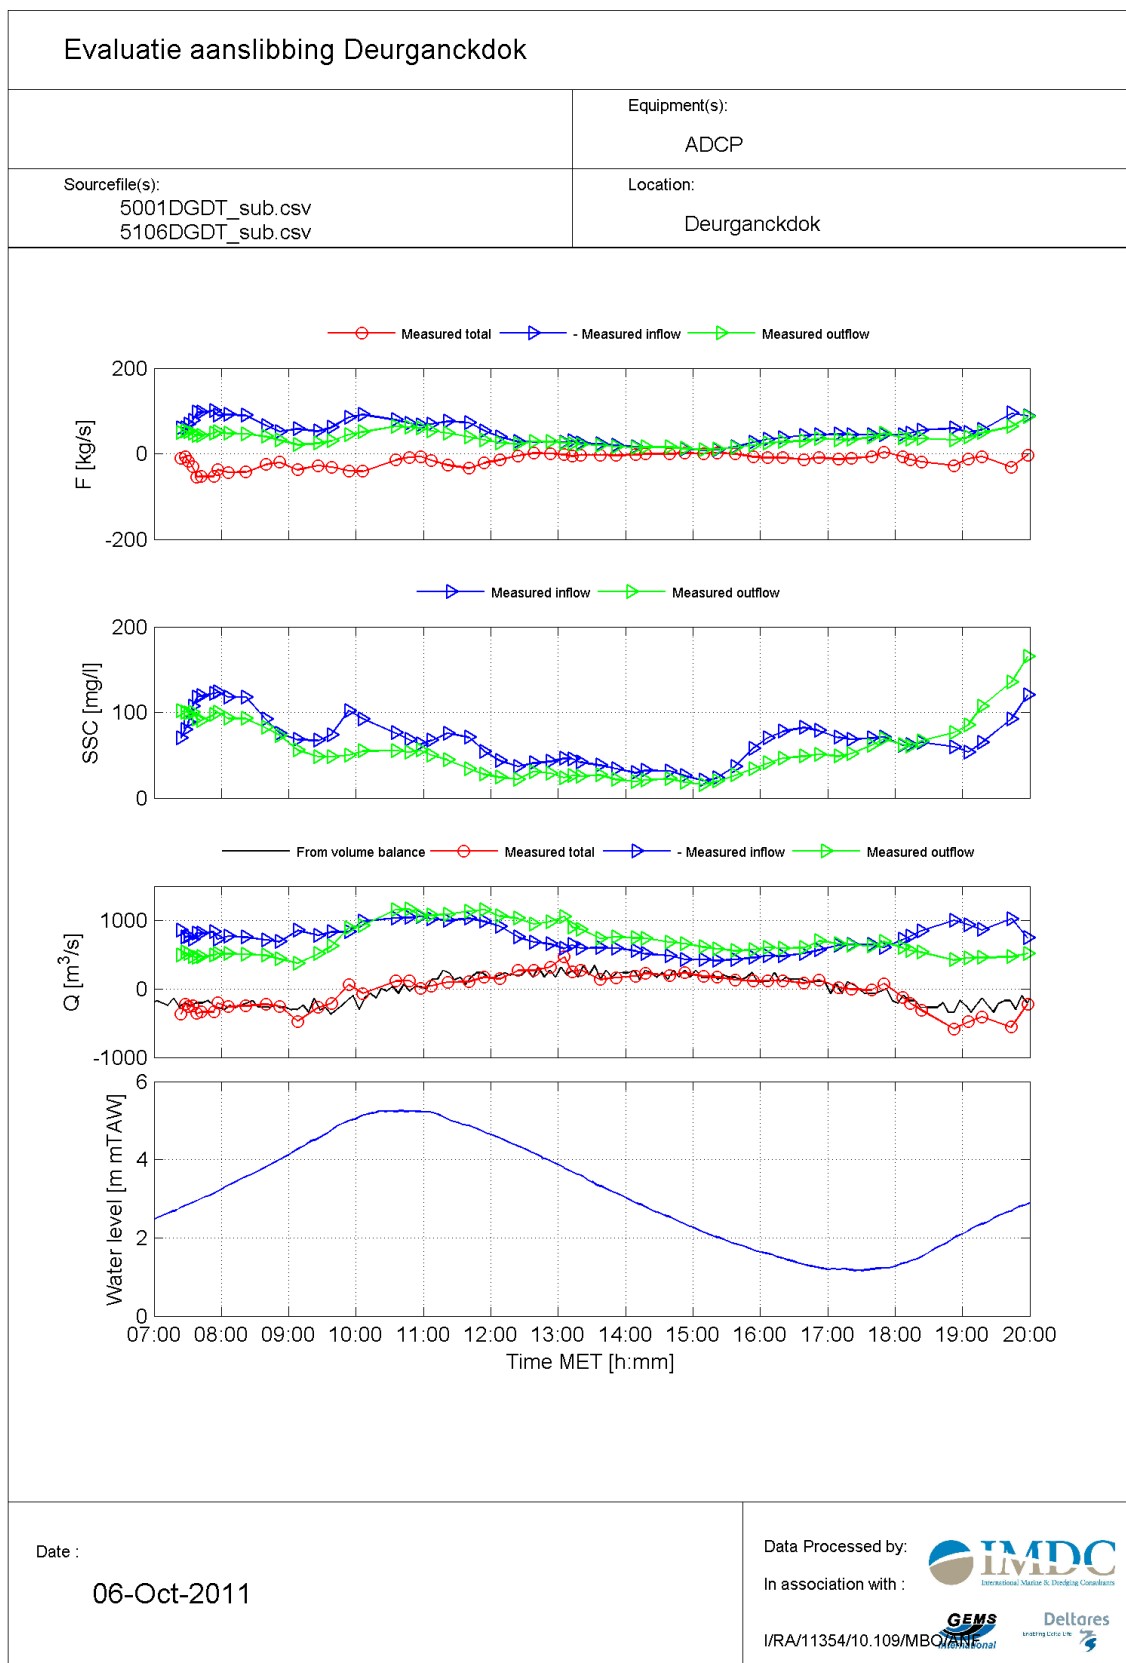


Annex Figure 10: Suspended sediment concentration through the measured cross section

Annex I Current and SSC patterns - intercomparison with earlier measurement campaigns at Deurganckdok




I.1 Overview of the different campaigns




<i>Tidal Coefficient at tidal gauge: Liefkenshoek</i>				
<i>PROJECT (DESCRIPTION)</i>	<i>Date</i>	<i>Tidal coefficient</i>	<i>Tidal phase</i>	<i>Fresh water discharge at Schelle [m³/s]</i>
HCBS 1 (IMDC, 2006m)	17/11/2005	1.10	Spring	91*
HCBS 2 (IMDC, 2006c)	22/03/2006	0.97	Average	94*
HCBS 2 (IMDC, 2007o)	27/09/2006	1.03	Average	33*
DGD 1 (IMDC, 2008a)	24/10/2007	1.02	Average	46*
DGD 2 (IMDC, 2008k)	11/03/2008	1.17	Spring	286*
DGD 3 (IMDC, 2008u)	19/06/2008	1.15	Spring	93*
DGD 3 (IMDC, 2008v)	26/06/2008	0.97	Average	69*
DGD3 (IMDC 2008x)	24/09/2008	0.81	Neap	75*
DGD 3 (IMDC, 2009a)	30/09/2008	1.08	Spring	82*
DGD 3 (IMDC, 2009e)	02/12/2008	0.98	Average	154*
DGD 3(IMDC,2009f)	10/12/2008	0.97	Average	222*
DGD 3(IMDC,2009i)	06/03/2009	0.82	Neap	99*
DGD 3(IMDC,2009n)	12/03/2009	1.24	Spring	129*
Eff DGD (IMDC, 2012a)	28/09/2011	1.06	Avg/Spring	40**
Eff DGD (IMDC, 2012b)	06/10/2011	0.83	Neap	55**
Eff DGD (IMDC, 2012a)	13/10/2011	1.17	Spring	60**


I.2 1 hour after HW (density currents)




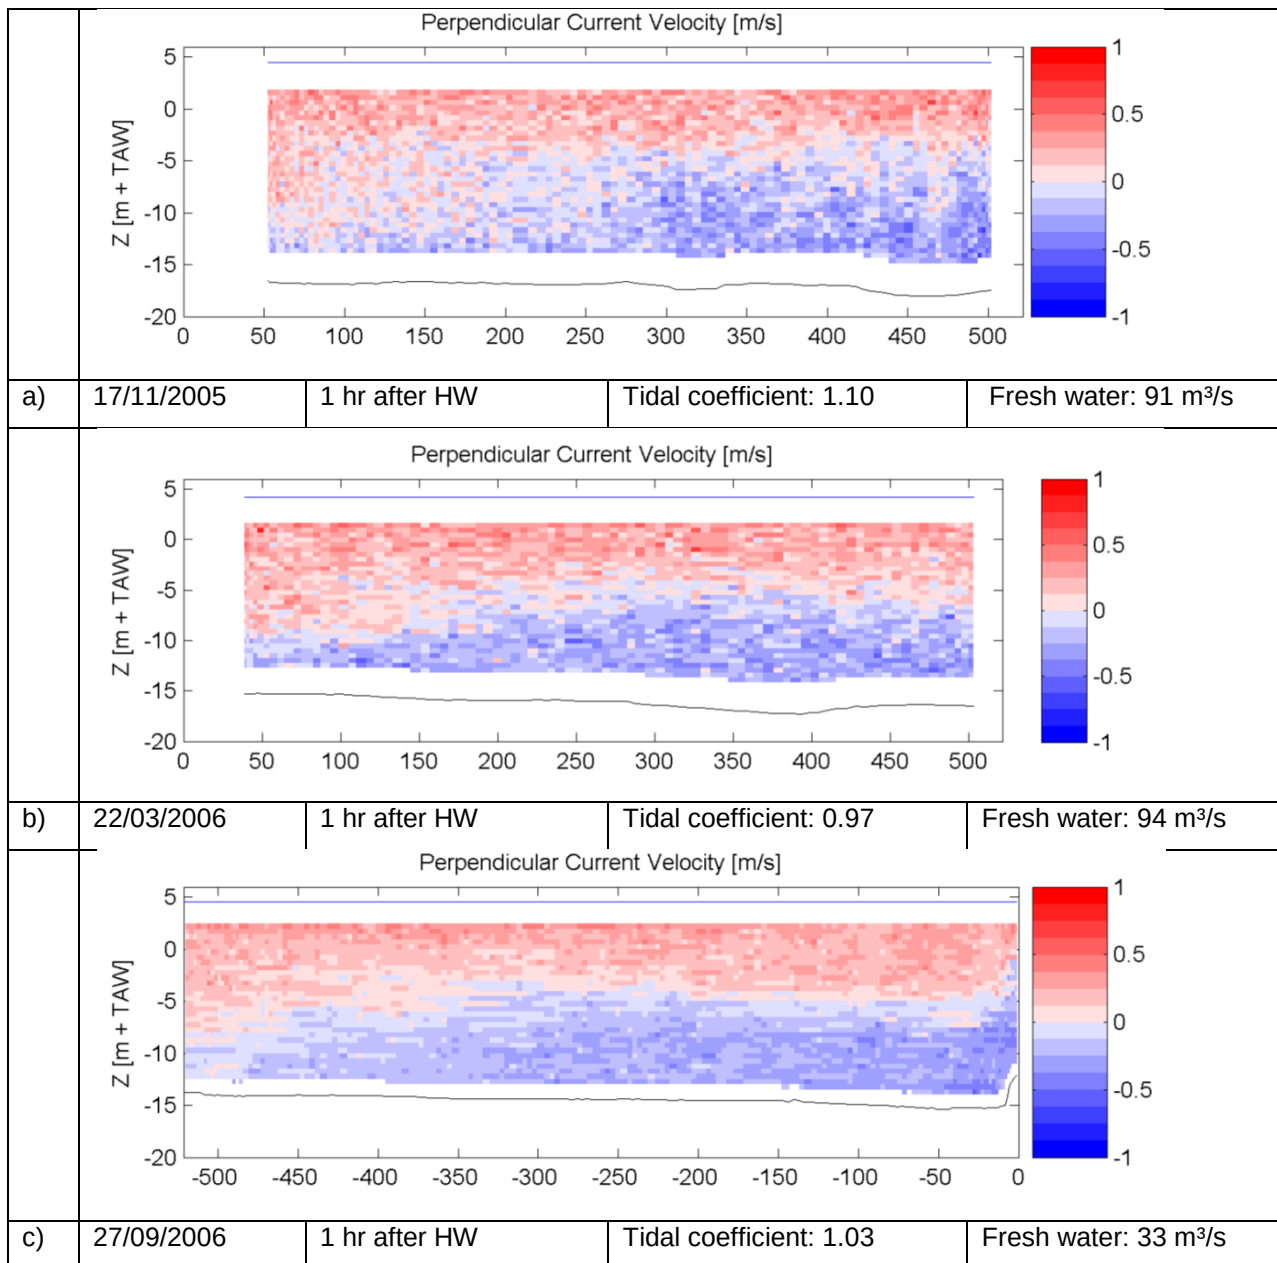



	Perpendicular Current Velocity [m/s] Z [m + TAW] 5 0 -5 -10 -15 -20 -500 -450 -400 -350 -300 -250 -200 -150 -100 -50 0 1 0.5 0 -0.5 -1			
d)	24/10/2007	1 hr after HW	Tidal coefficient: 1.02	Fresh water: 46 m³/s
	Perpendicular Current Velocity [m/s] Z [m + TAW] 5 0 -5 -10 -15 -20 0 50 100 150 200 250 300 350 400 450 500 1 0.5 0 -0.5 -1			
e)	11/03/2008	1 hr after HW	Tidal coefficient: 1.17	Fresh water: 286 m³/s
	Perpendicular Current Velocity [m/s] Z [m + TAW] 5 0 -5 -10 -15 -20 -500 -450 -400 -350 -300 -250 -200 -150 -100 -50 0 1 0.5 0 -0.5 -1			
f)	19/06/2008	1 hr after HW	Tidal coefficient: 1.15	Fresh water: 93 m³/s
	Perpendicular Current Velocity [m/s] Z [m + TAW] 5 0 -5 -10 -15 -20 0 50 100 150 200 250 300 350 400 450 500 1 0.5 0 -0.5 -1			
g)	26/06/2008	1 hr after HW	Tidal coefficient: 0.97	Fresh water: 69 m³/s

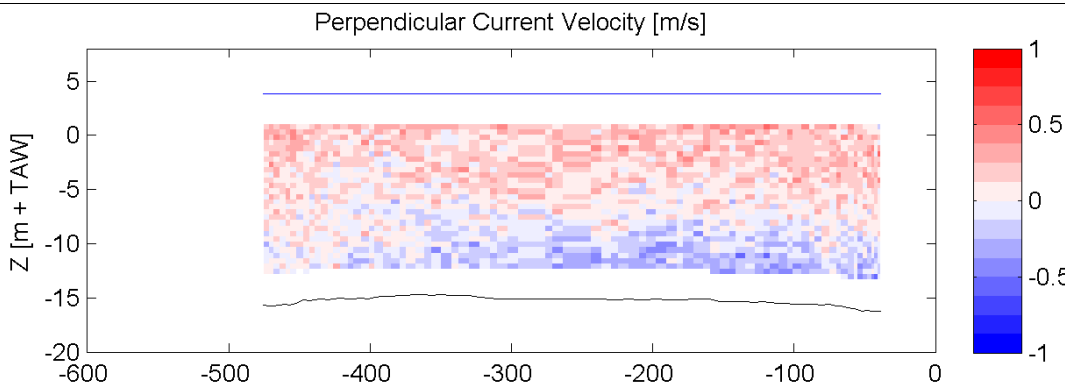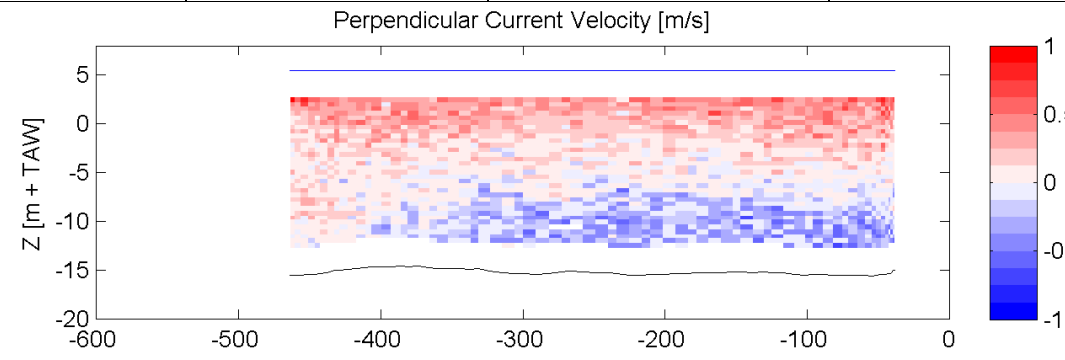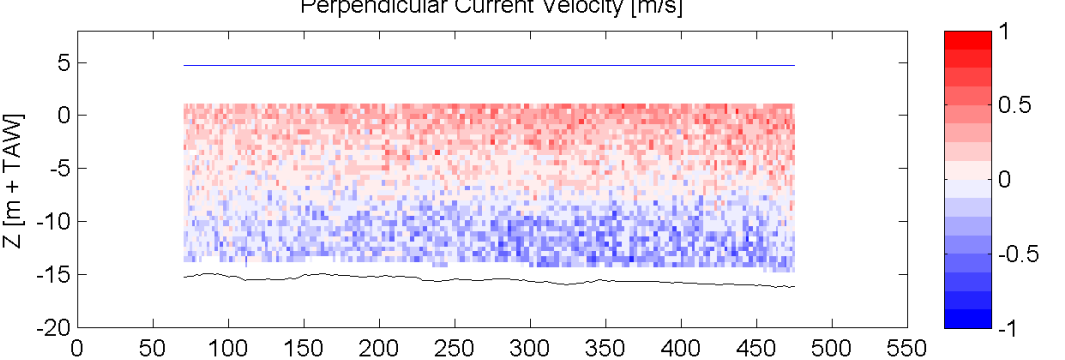
				
h)	24/09/2008	1 hr after HW	Tidal coefficient: 0.81	Fresh water: 75 m³/s
				
i)	30/09/2008	1 hr after HW	Tidal coefficient: 1.08	Fresh water: 82 m³/s
				
j)	02/12/2008	1 hr after HW	Tidal coefficient: 0.98	Fresh water: 154 m³/s


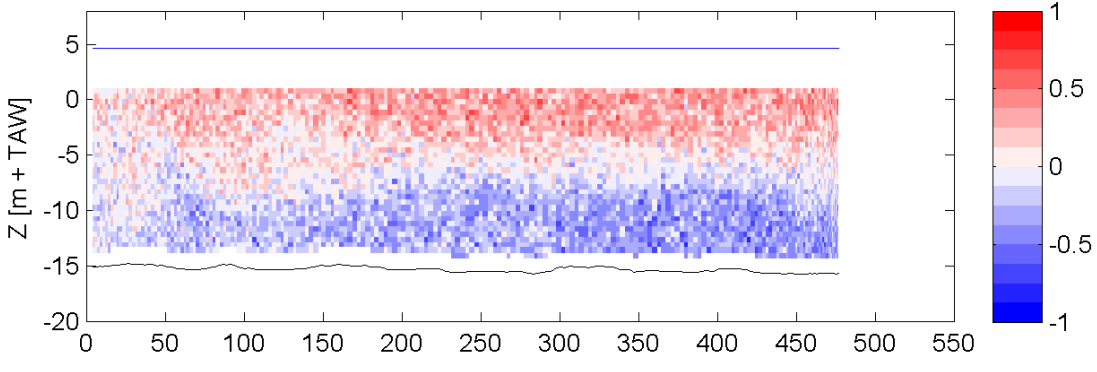
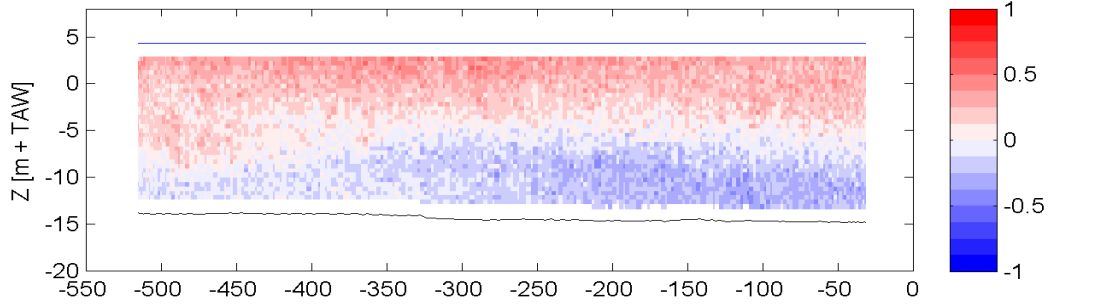
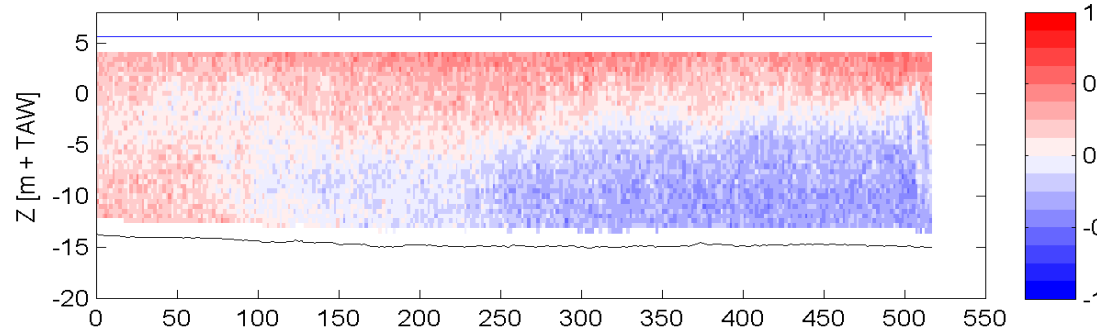
	Perpendicular Current Velocity [m/s] 			
k)	10/12/2008	1 hr after HW	Tidal coefficient: 0.97	Fresh water: 222 m³/s
	Perpendicular Current Velocity [m/s] 			
l)	06/03/2009	1 hr after HW	Tidal coefficient: 0.82	Fresh water: 99m³/s
	Perpendicular Current Velocity [m/s] 			
m)	12/03/2009	1 hr after HW	Tidal coefficient: 1.24	Fresh water: 129m³/s
	No velocity data available			
n)	28/09/2011	1 hr after HW	Tidal coefficient: 1.17	Fresh water: 40 m³/s

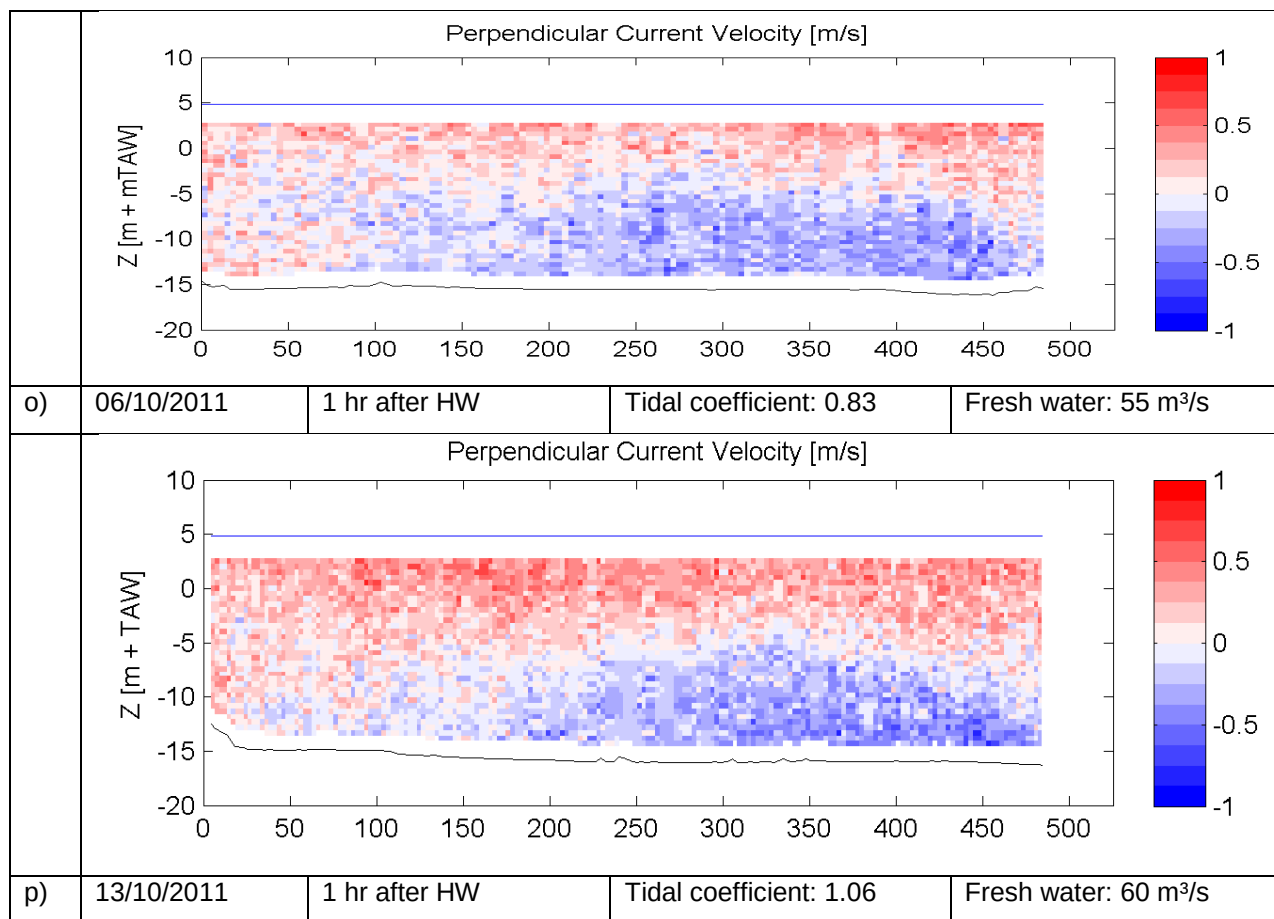

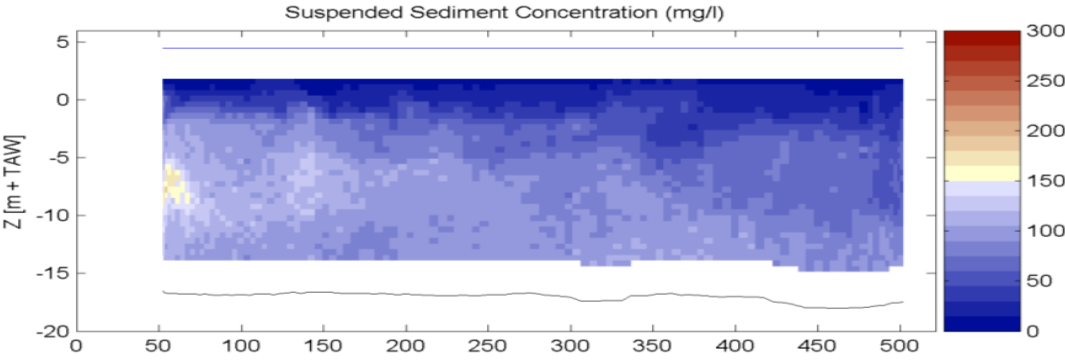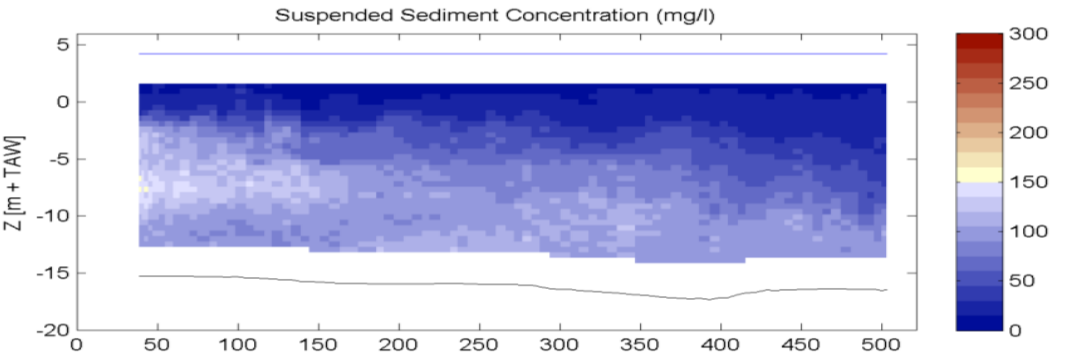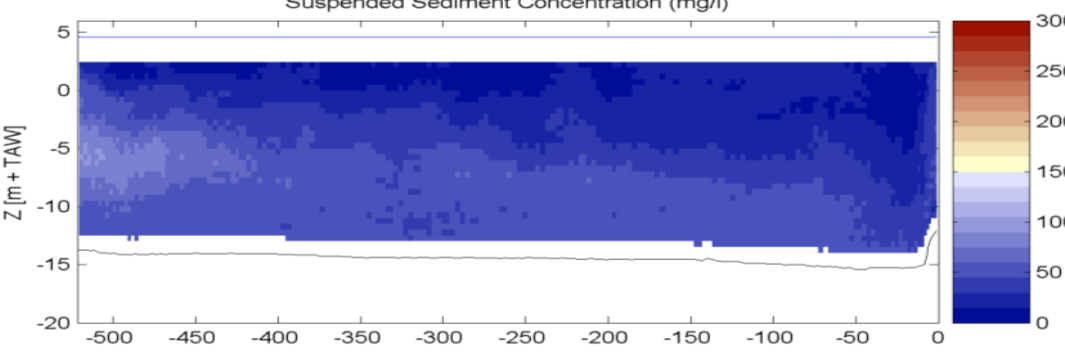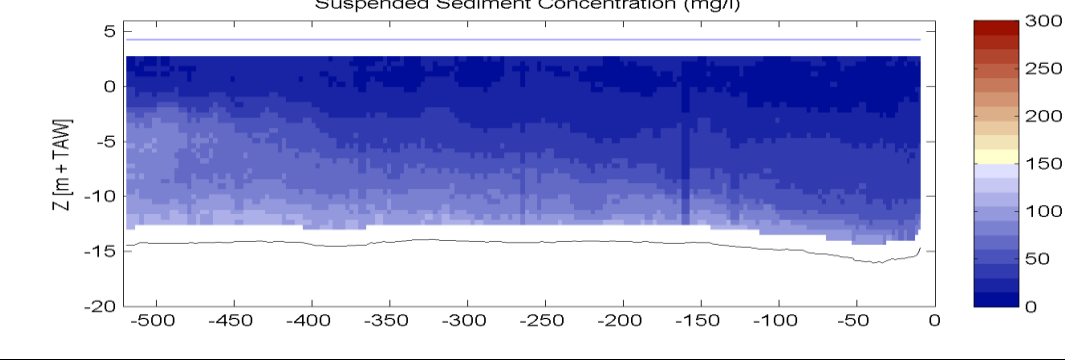
				
a)	17/11/2005	1 hr after HW	Tidal coefficient: 1.10	Fresh water: 91 m ³ /s
				
b)	22/03/2006	1 hr after HW	Tidal coefficient: 0.97	Fresh water: 94 m ³ /s
				
c)	27/09/2006	1 hr after HW	Tidal coefficient: 1.03	Fresh water: 33 m ³ /s
				
d)	24/10/2007	1 hr after HW	Tidal coefficient: 1.02	Fresh water: 46 m ³ /s




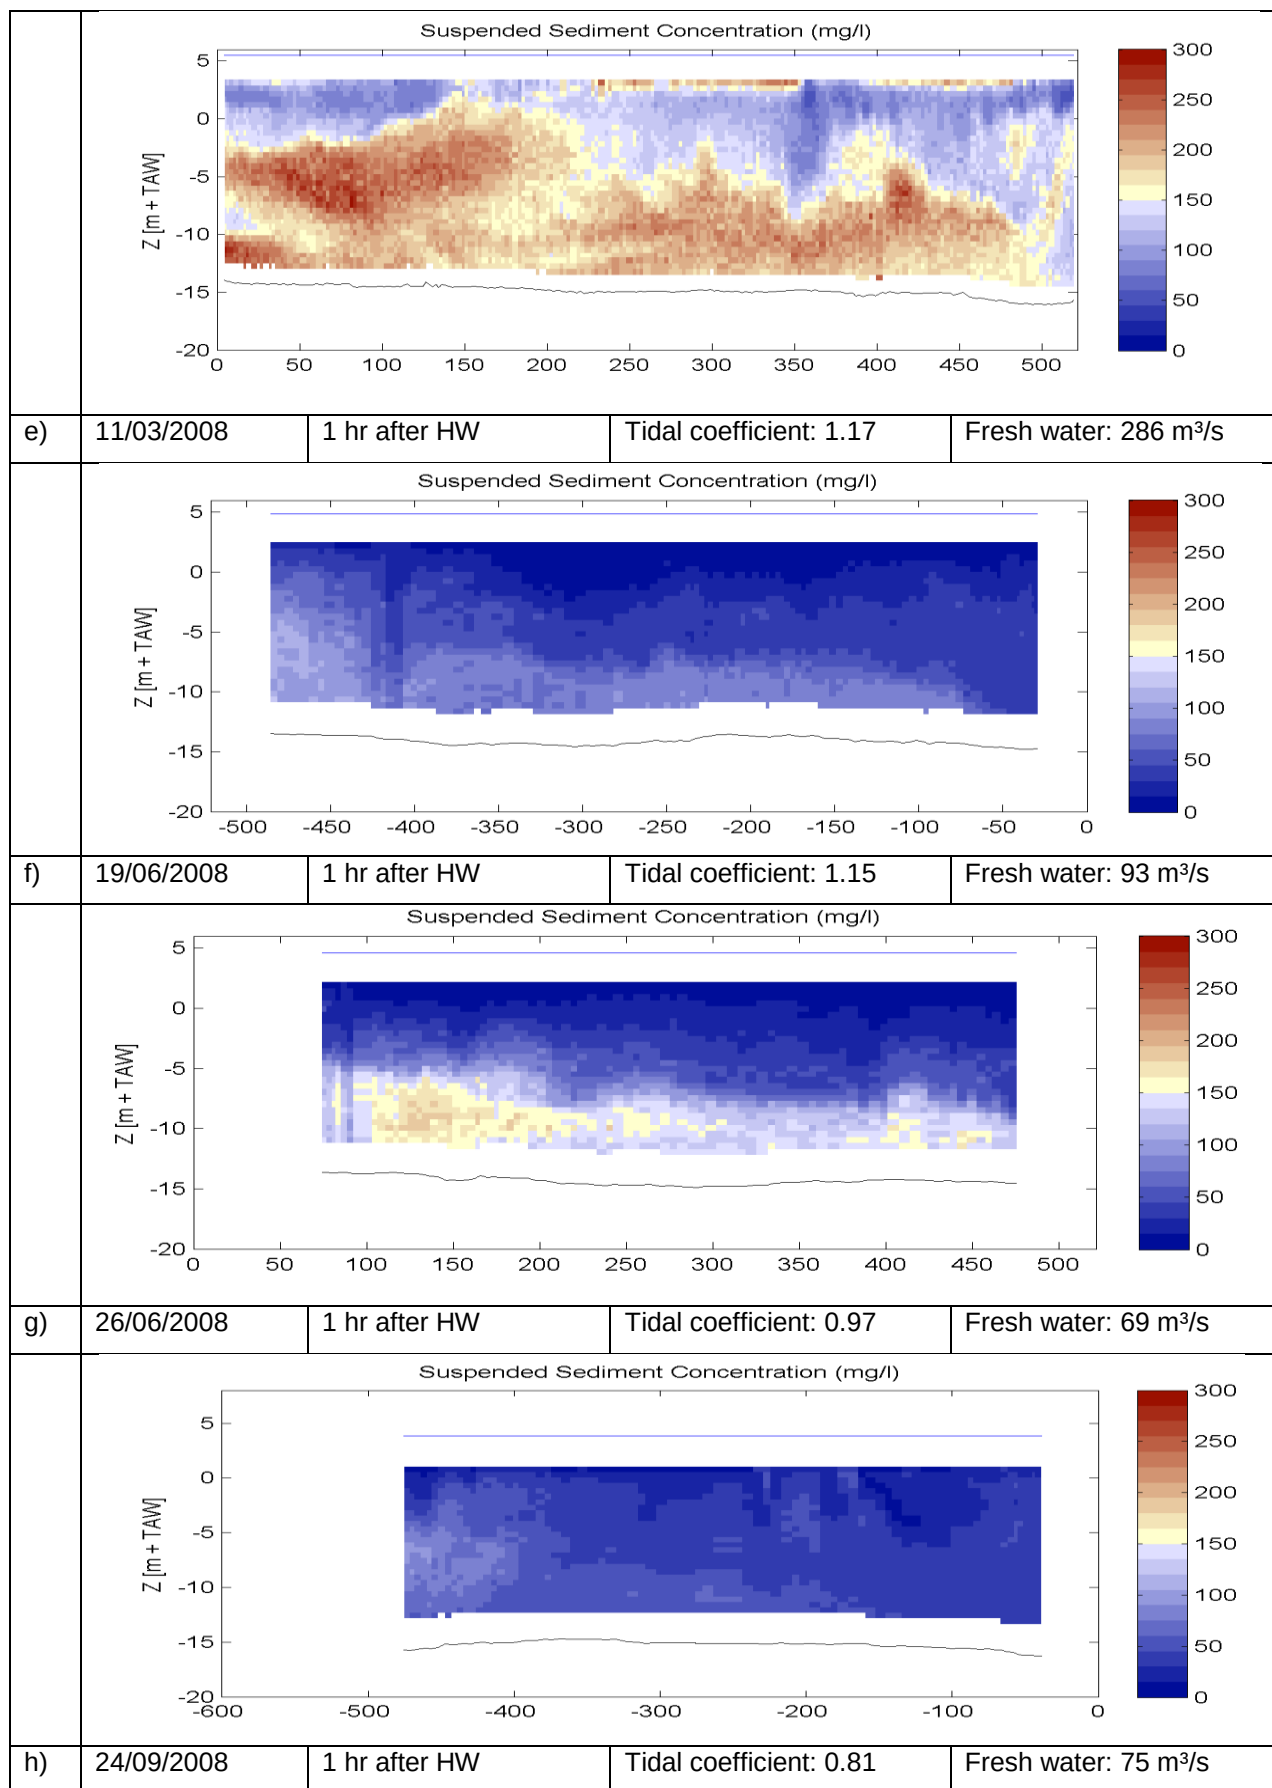




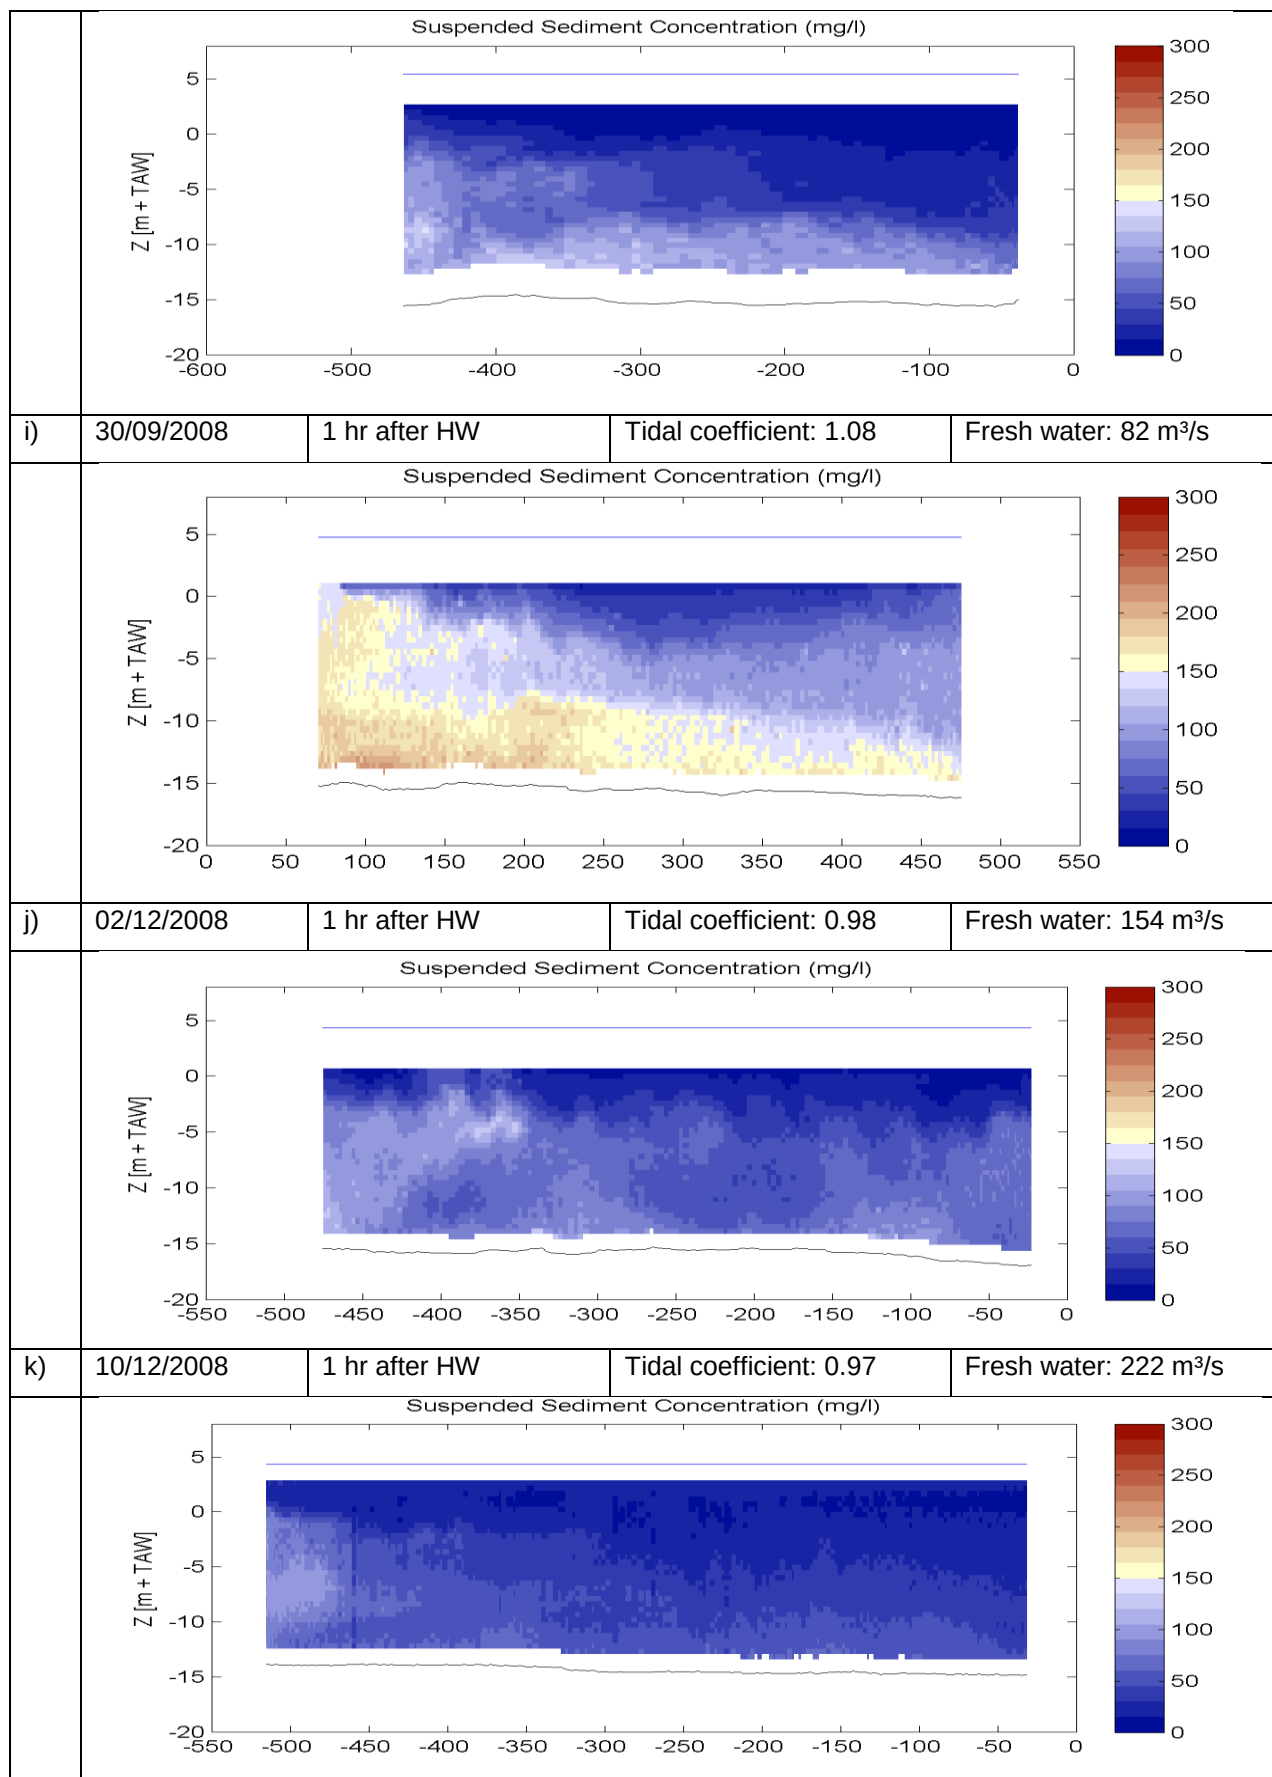


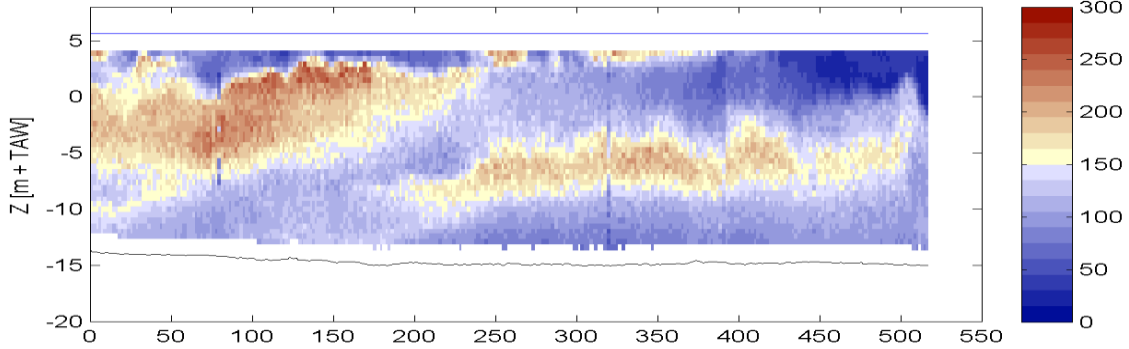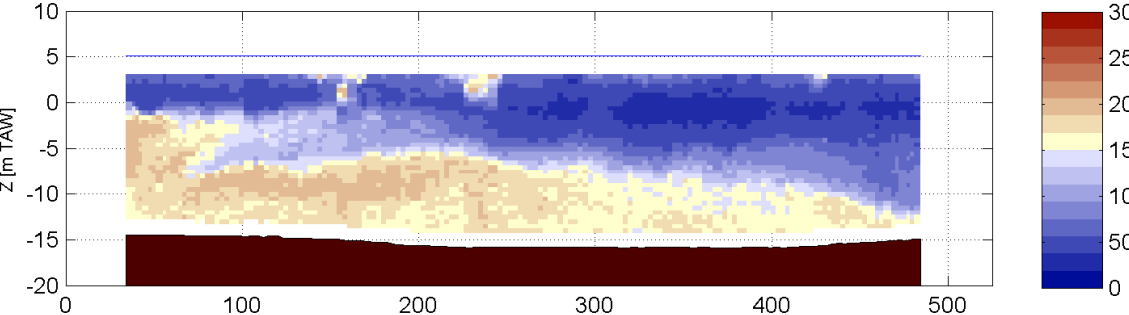
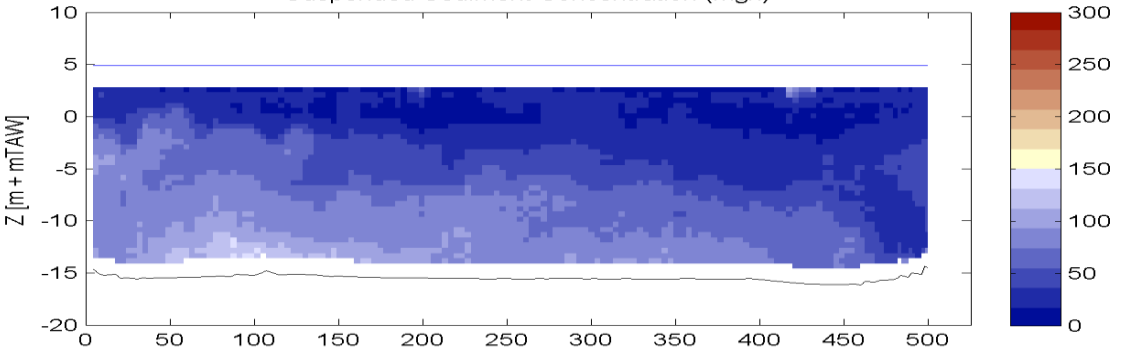
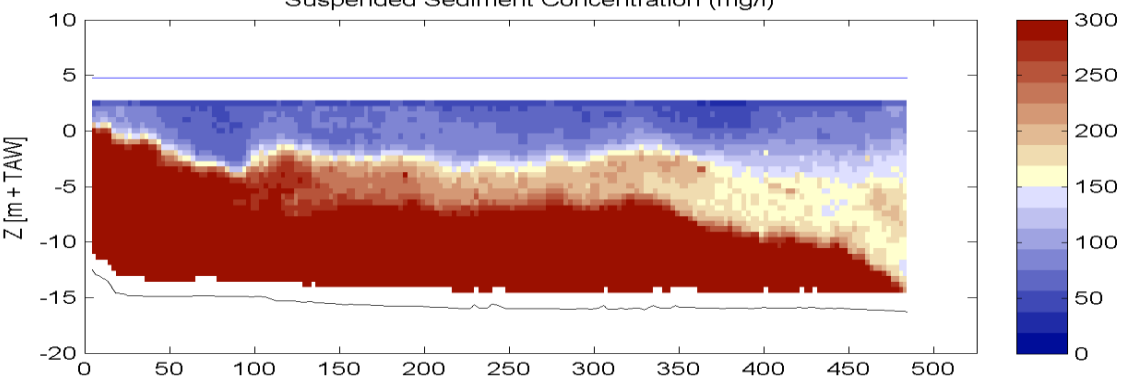
l)	06/03/2009	1 hr after HW	Tidal coefficient: 0.82	Fresh water: 99m ³ /s
	Suspended Sediment Concentration (mg/l) 			
m)	12/03/2009	1 hr after HW	Tidal coefficient: 1.24	Fresh water: 129m ³ /s
				
n)	28/09/2011	1 hr after HW	Tidal coefficient: 1.17	Fresh water: 40 m ³ /s
	Suspended Sediment Concentration (mg/l) 			
o)	06/10/2011	1 hr after HW	Tidal coefficient: 0.83	Fresh water: 55 m ³ /s
	Suspended Sediment Concentration (mg/l) 			
p)	13/10/2011	1 hr after HW	Tidal coefficient: 1.06	Fresh water: 60 m ³ /s


I.3 3 hours after HW (density currents)

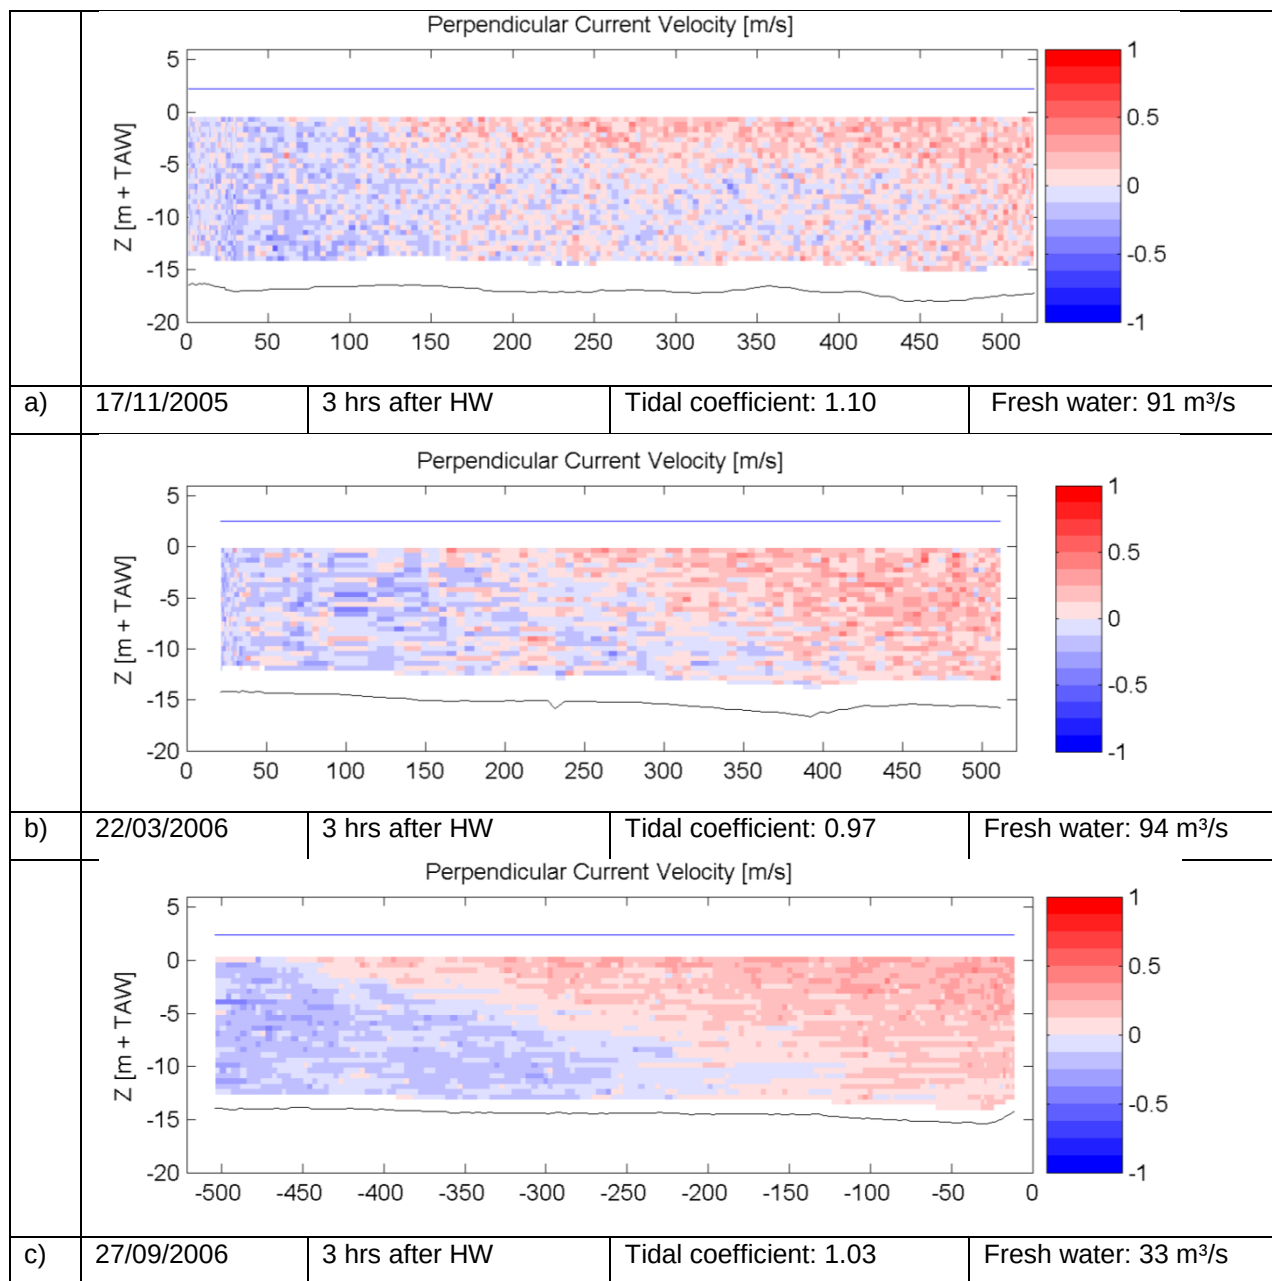

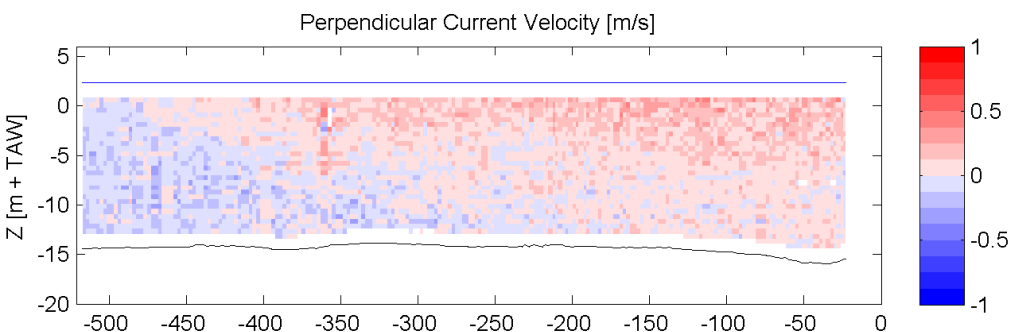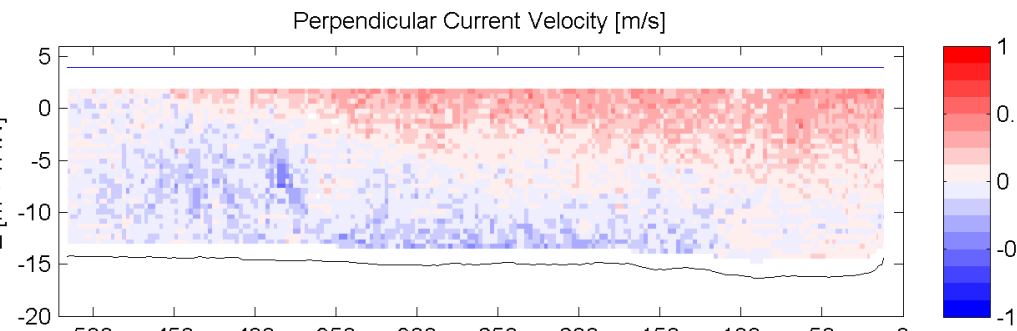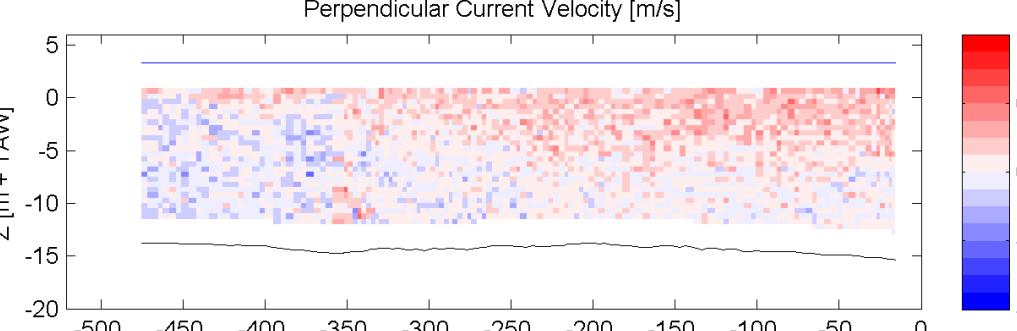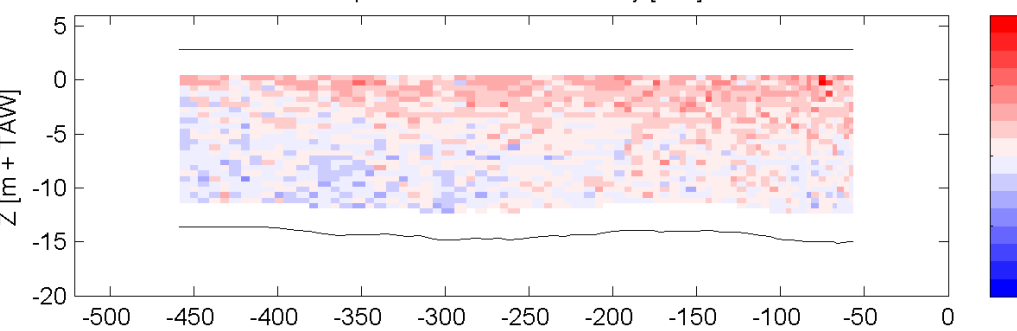
				
d)	24/10/2007	3 hrs after HW	Tidal coefficient: 1.02	Fresh water: 46 m³/s
				
e)	11/03/2008	3 hrs after HW	Tidal coefficient: 1.17	Fresh water: 286 m³/s
				
f)	19/06/2008	3 hrs after HW	Tidal coefficient: 1.15	Fresh water: 93 m³/s
				
g)	26/06/2008	3 hrs after HW	Tidal coefficient: 0.97	Fresh water: 69 m³/s

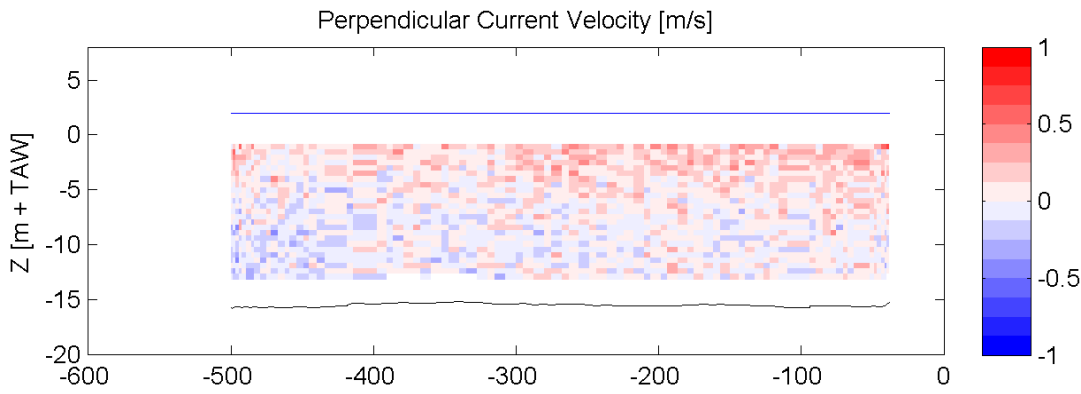
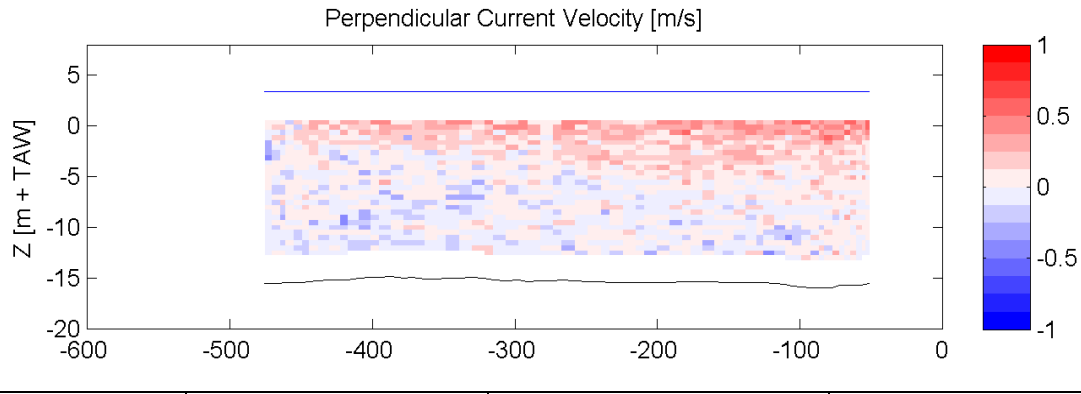
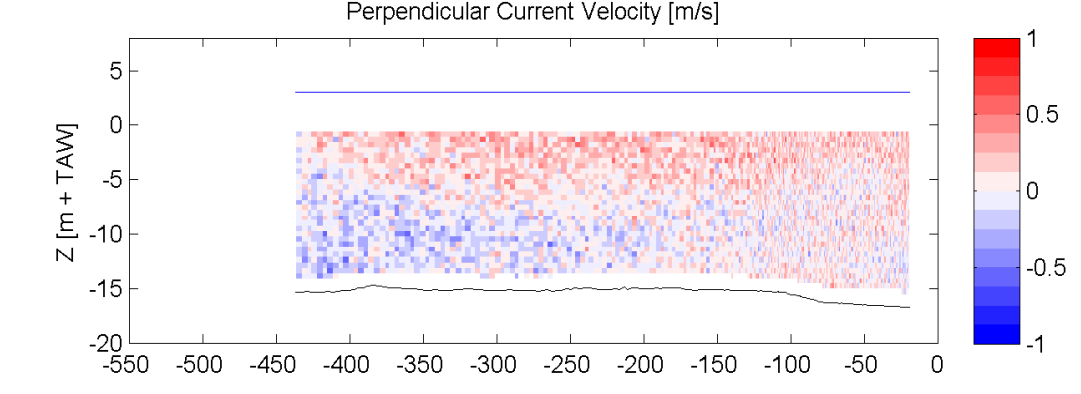
				
h)	24/09/2008	3 hrs after HW	Tidal coefficient: 0.81	Fresh water: 75 m³/s
				
i)	30/09/2008	3 hrs after HW	Tidal coefficient: 1.08	Fresh water: 82 m³/s
				
j)	02/12/2008	3 hrs after HW	Tidal coefficient: 0.98	Fresh water: 154 m³/s

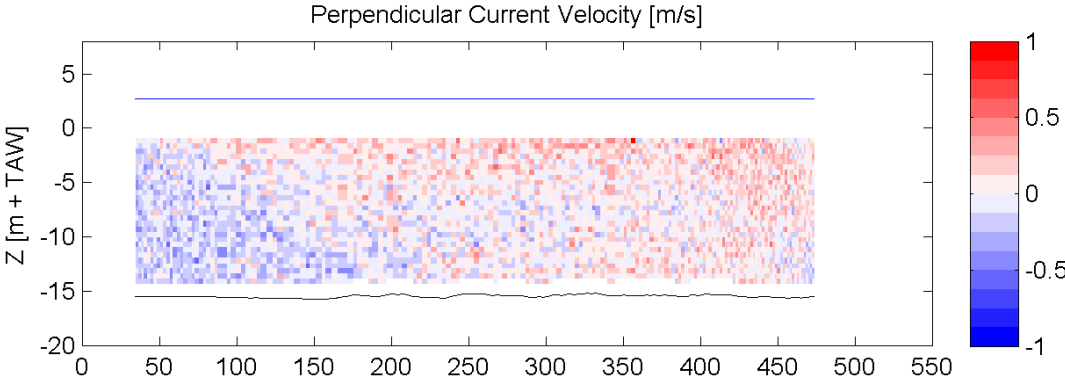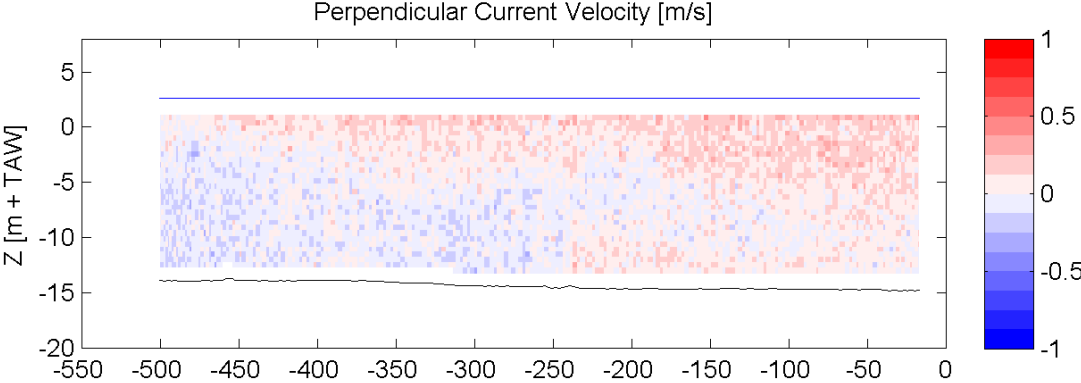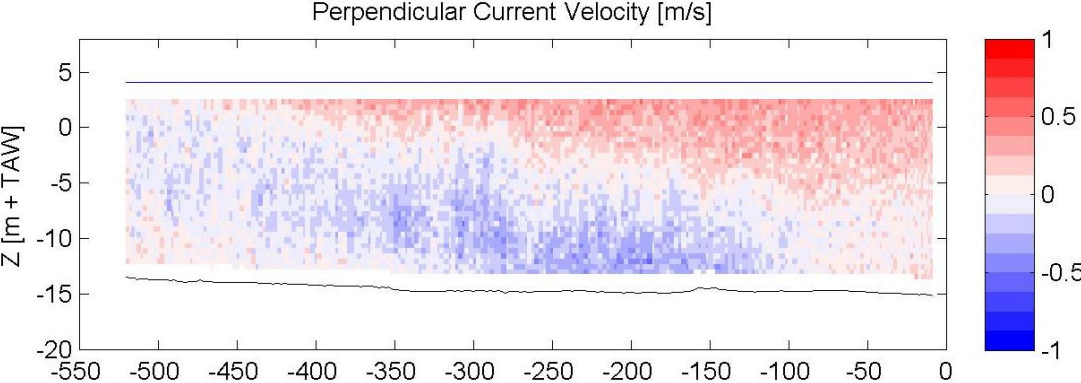
				
k)	10/12/2008	3 hrs after HW	Tidal coefficient: 0.97	Fresh water: 222m³/s
				
l)	06/03/2009	3 hrs after HW	Tidal coefficient: 0.82	Fresh water: 99m³/s
				
m)	12/03/2009	3 hrs after HW	Tidal coefficient: 1.24	Fresh water: 129m³/s
	No velocity data available			
n)	28/09/2011	3 hrs after HW	Tidal coefficient: 1.17	Fresh water: 40 m³/s

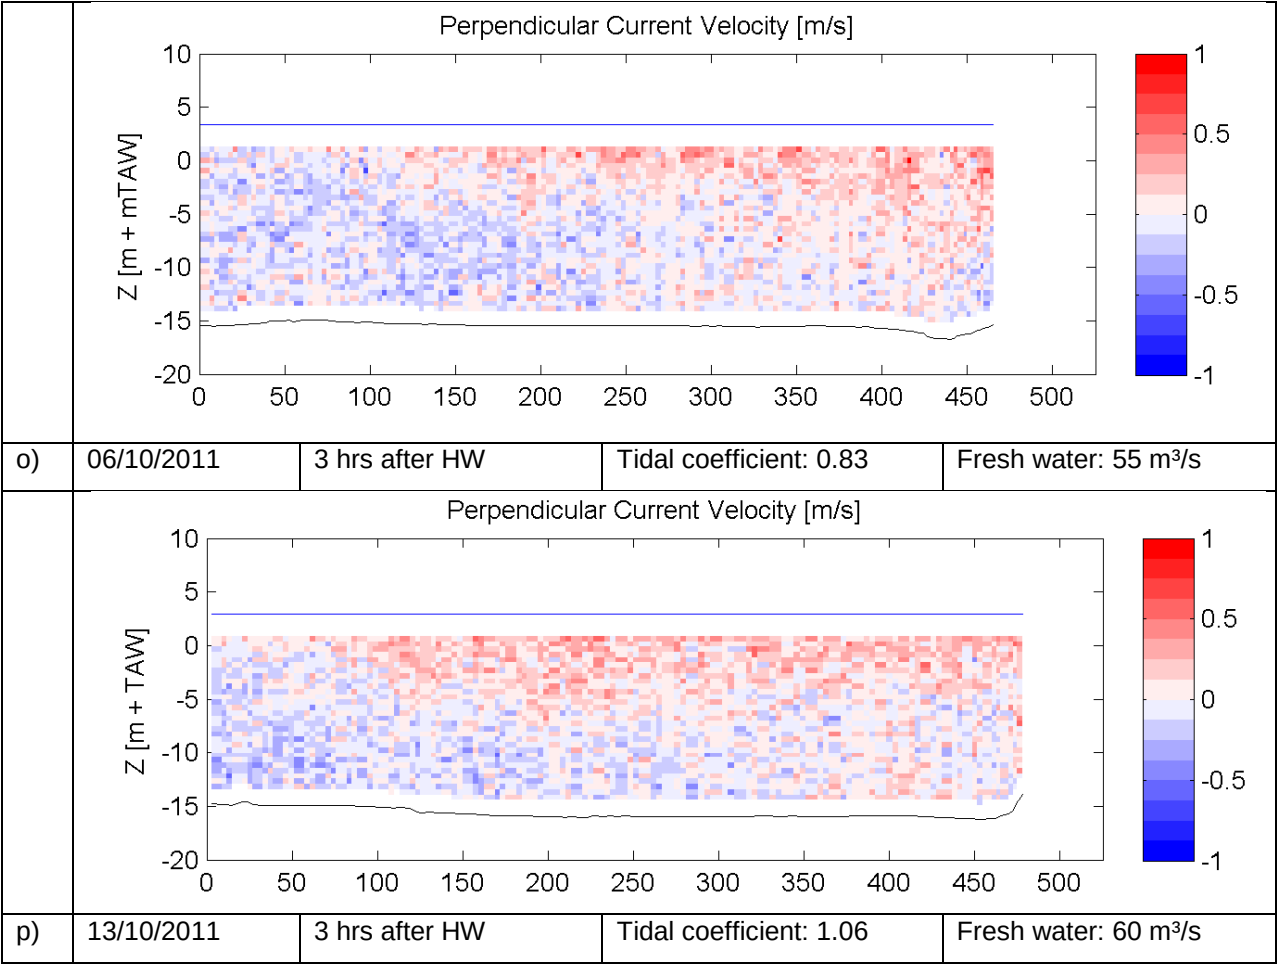



Annex Figure 11: Perpendicular current velocity at 3h after high water

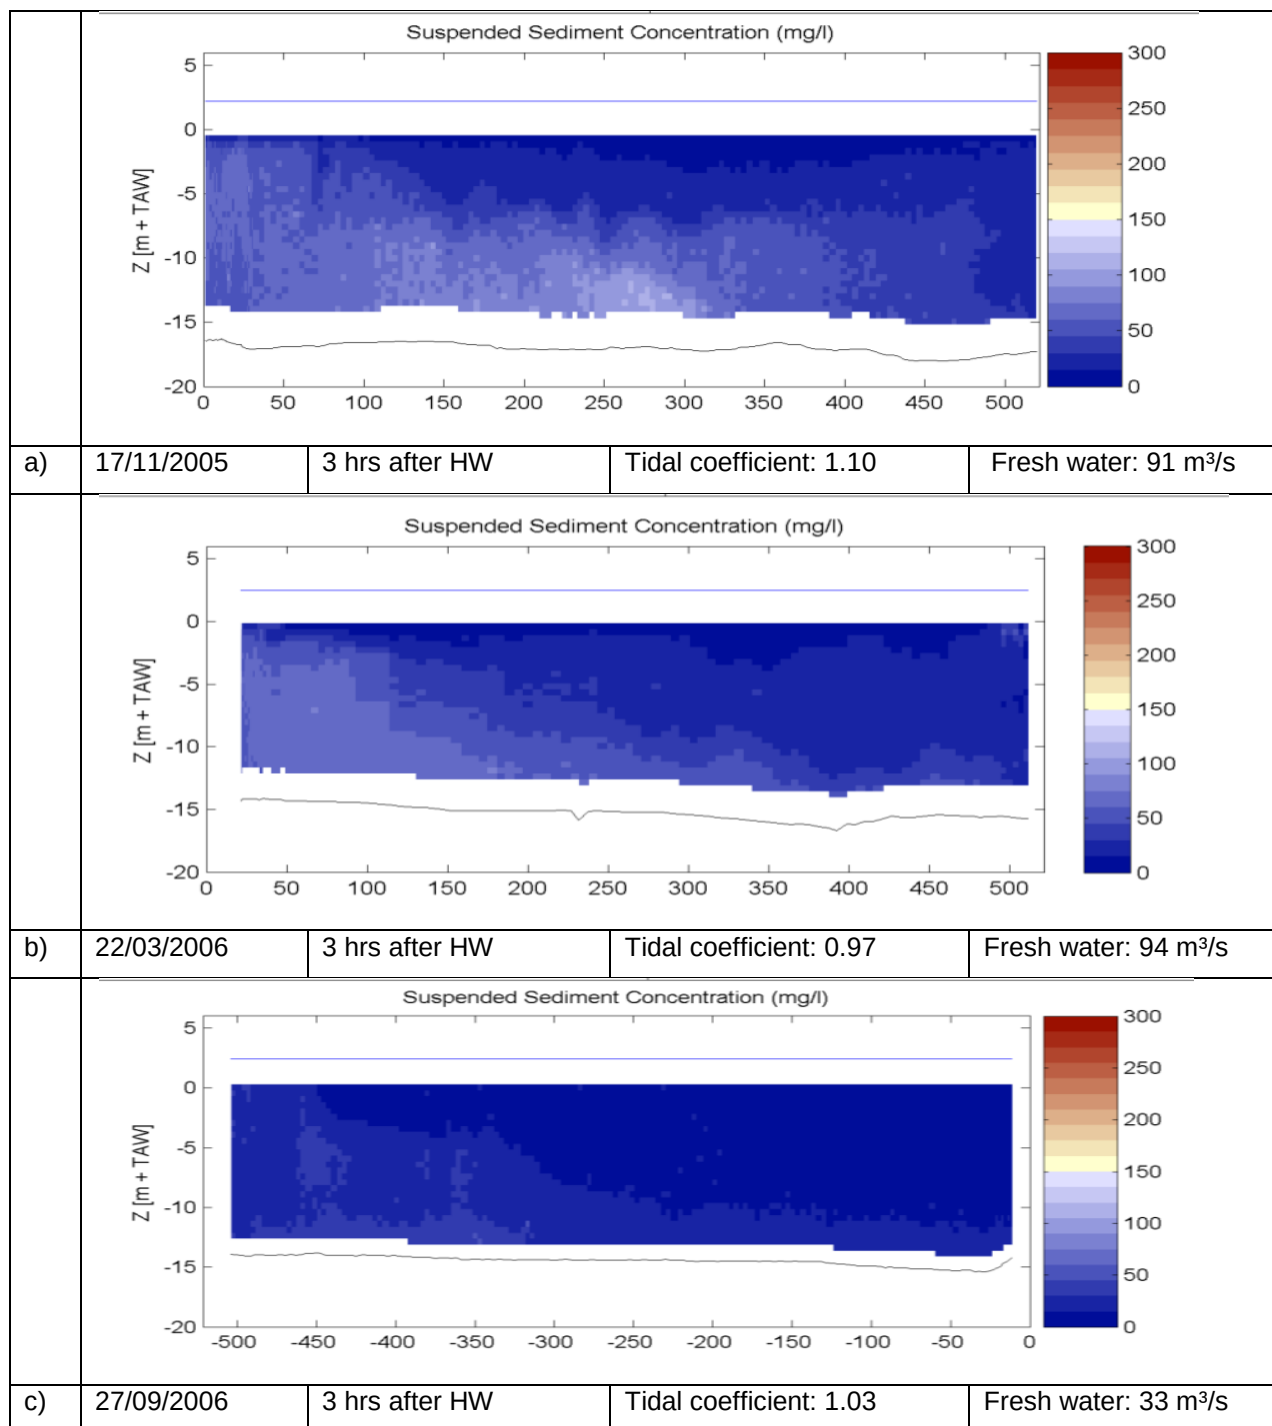

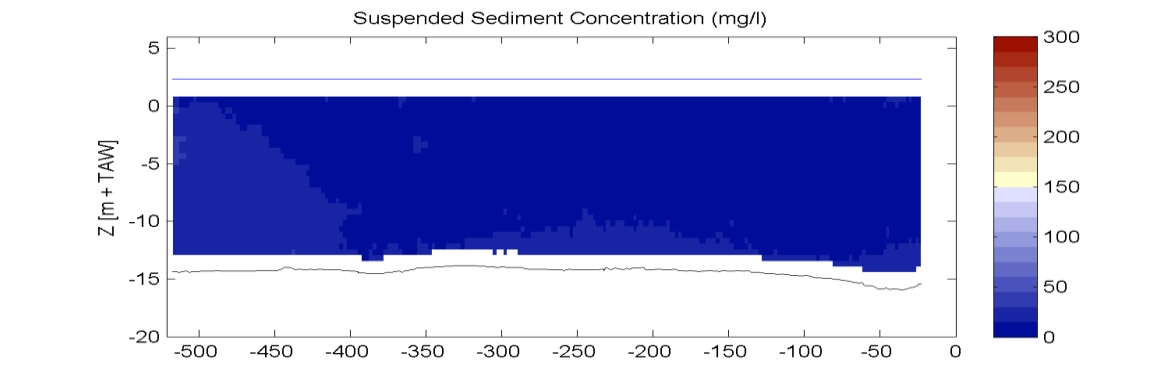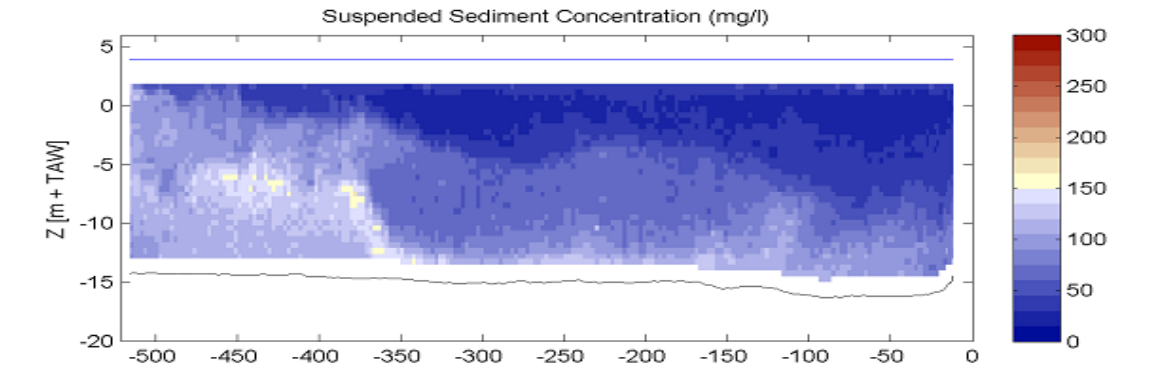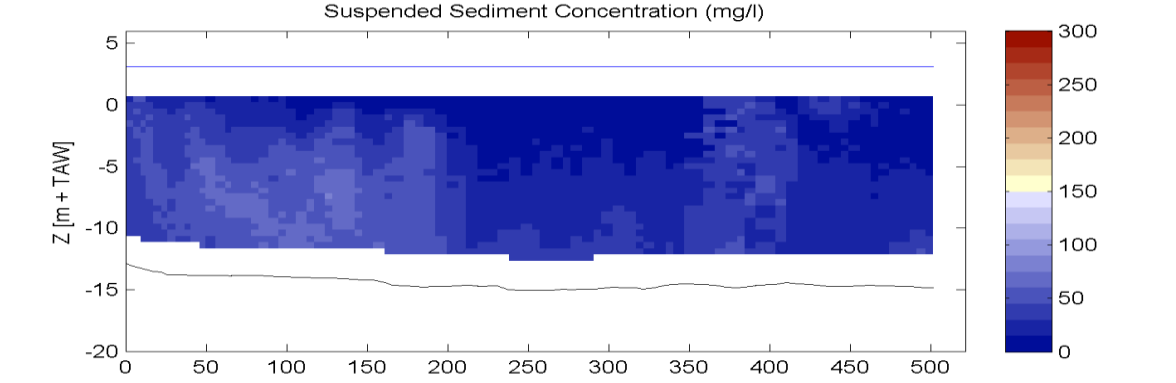				
d)	24/10/2007	3 hrs after HW	Tidal coefficient: 1.02	Fresh water: 46 m ³ /s
				
e)	11/03/2008	3 hrs after HW	Tidal coefficient: 1.17	Fresh water: 286 m ³ /s
				
f)	19/06/2008	3 hrs after HW	Tidal coefficient: 1.15	Fresh water: 93 m ³ /s

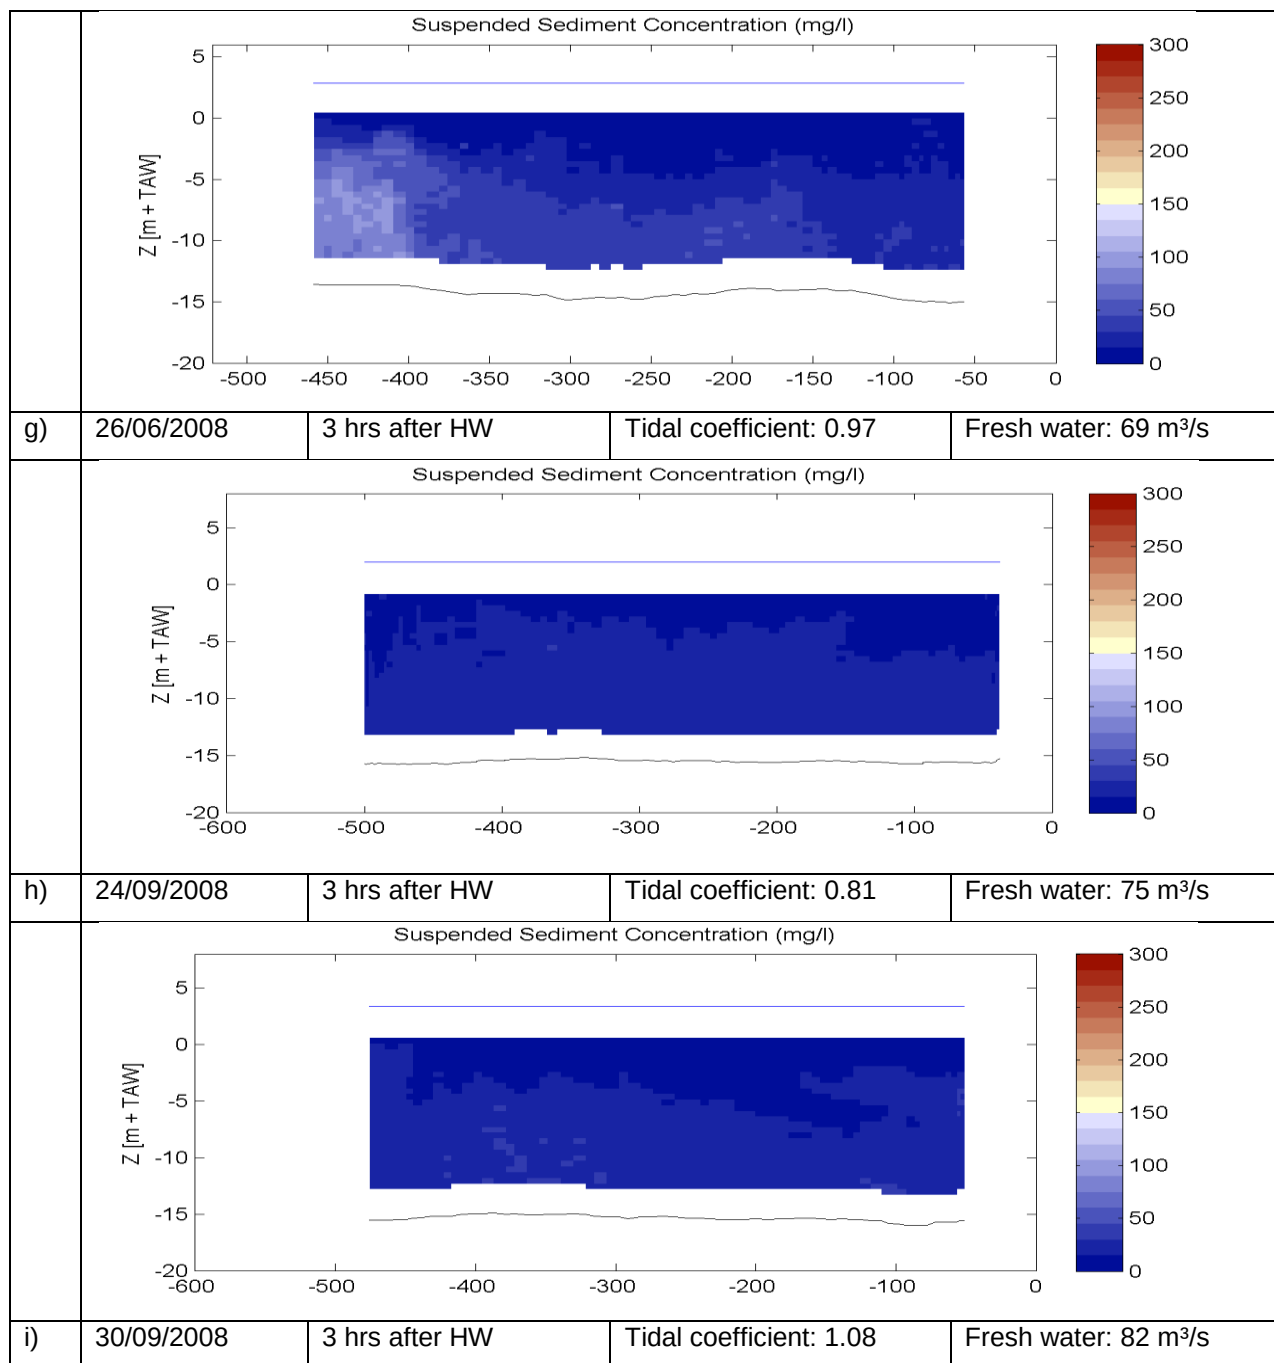

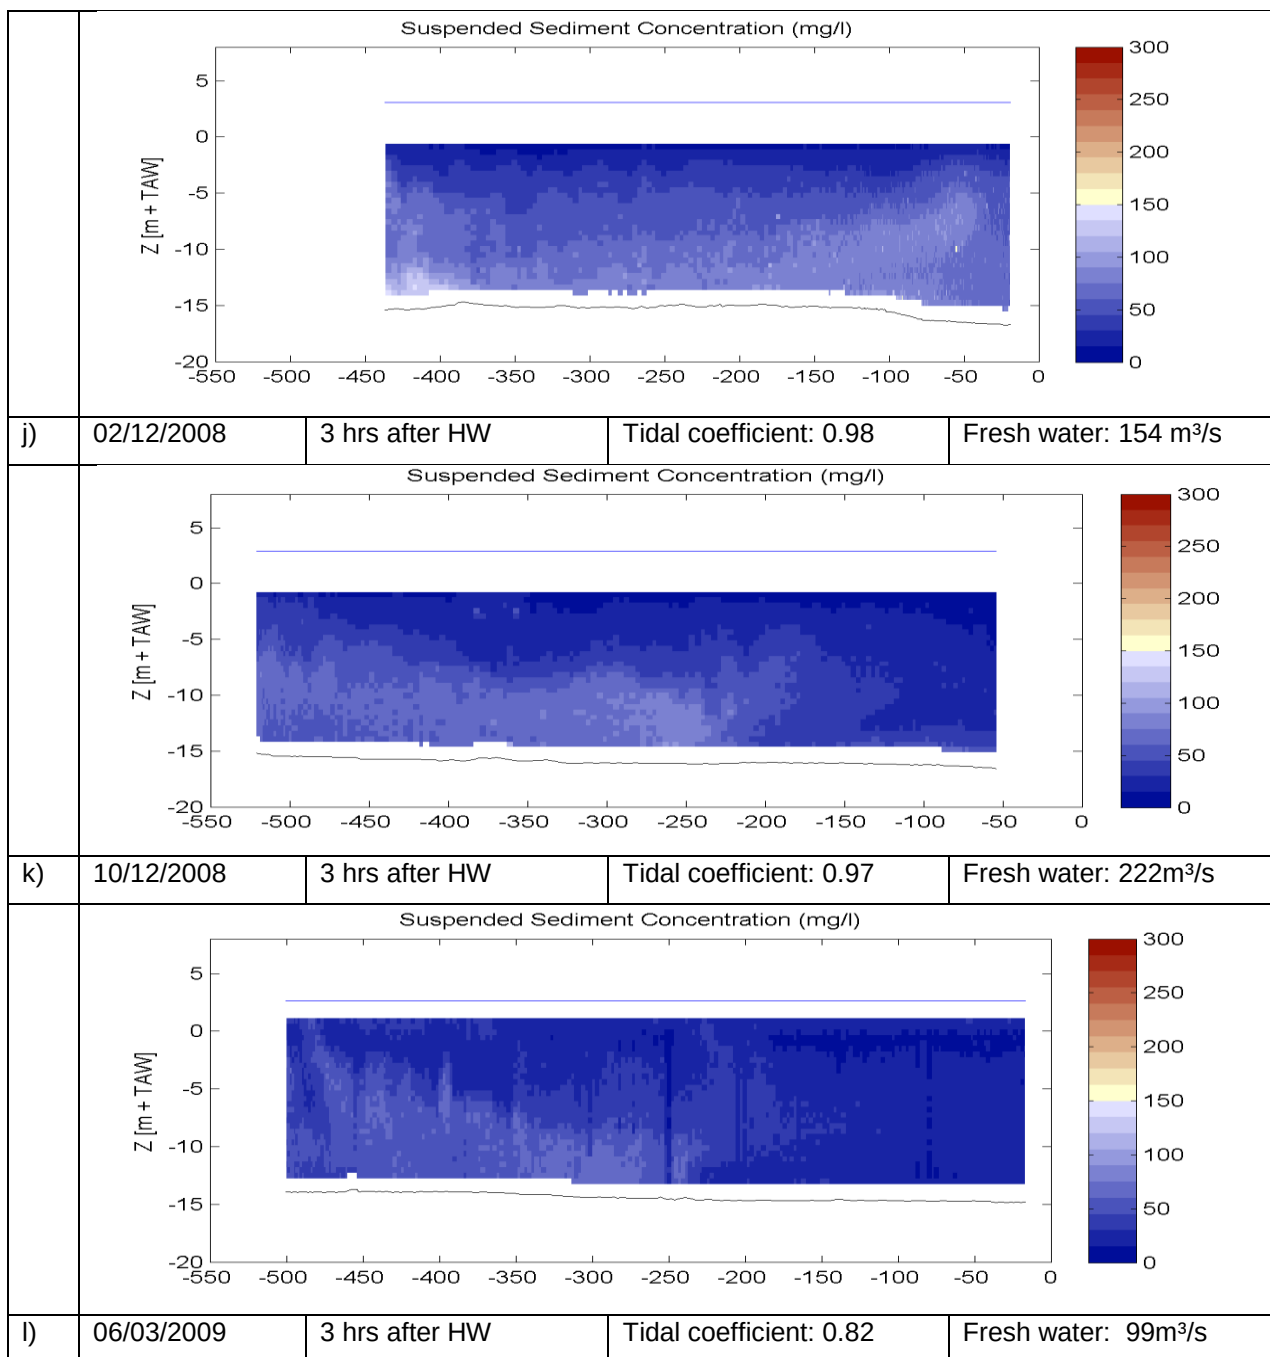

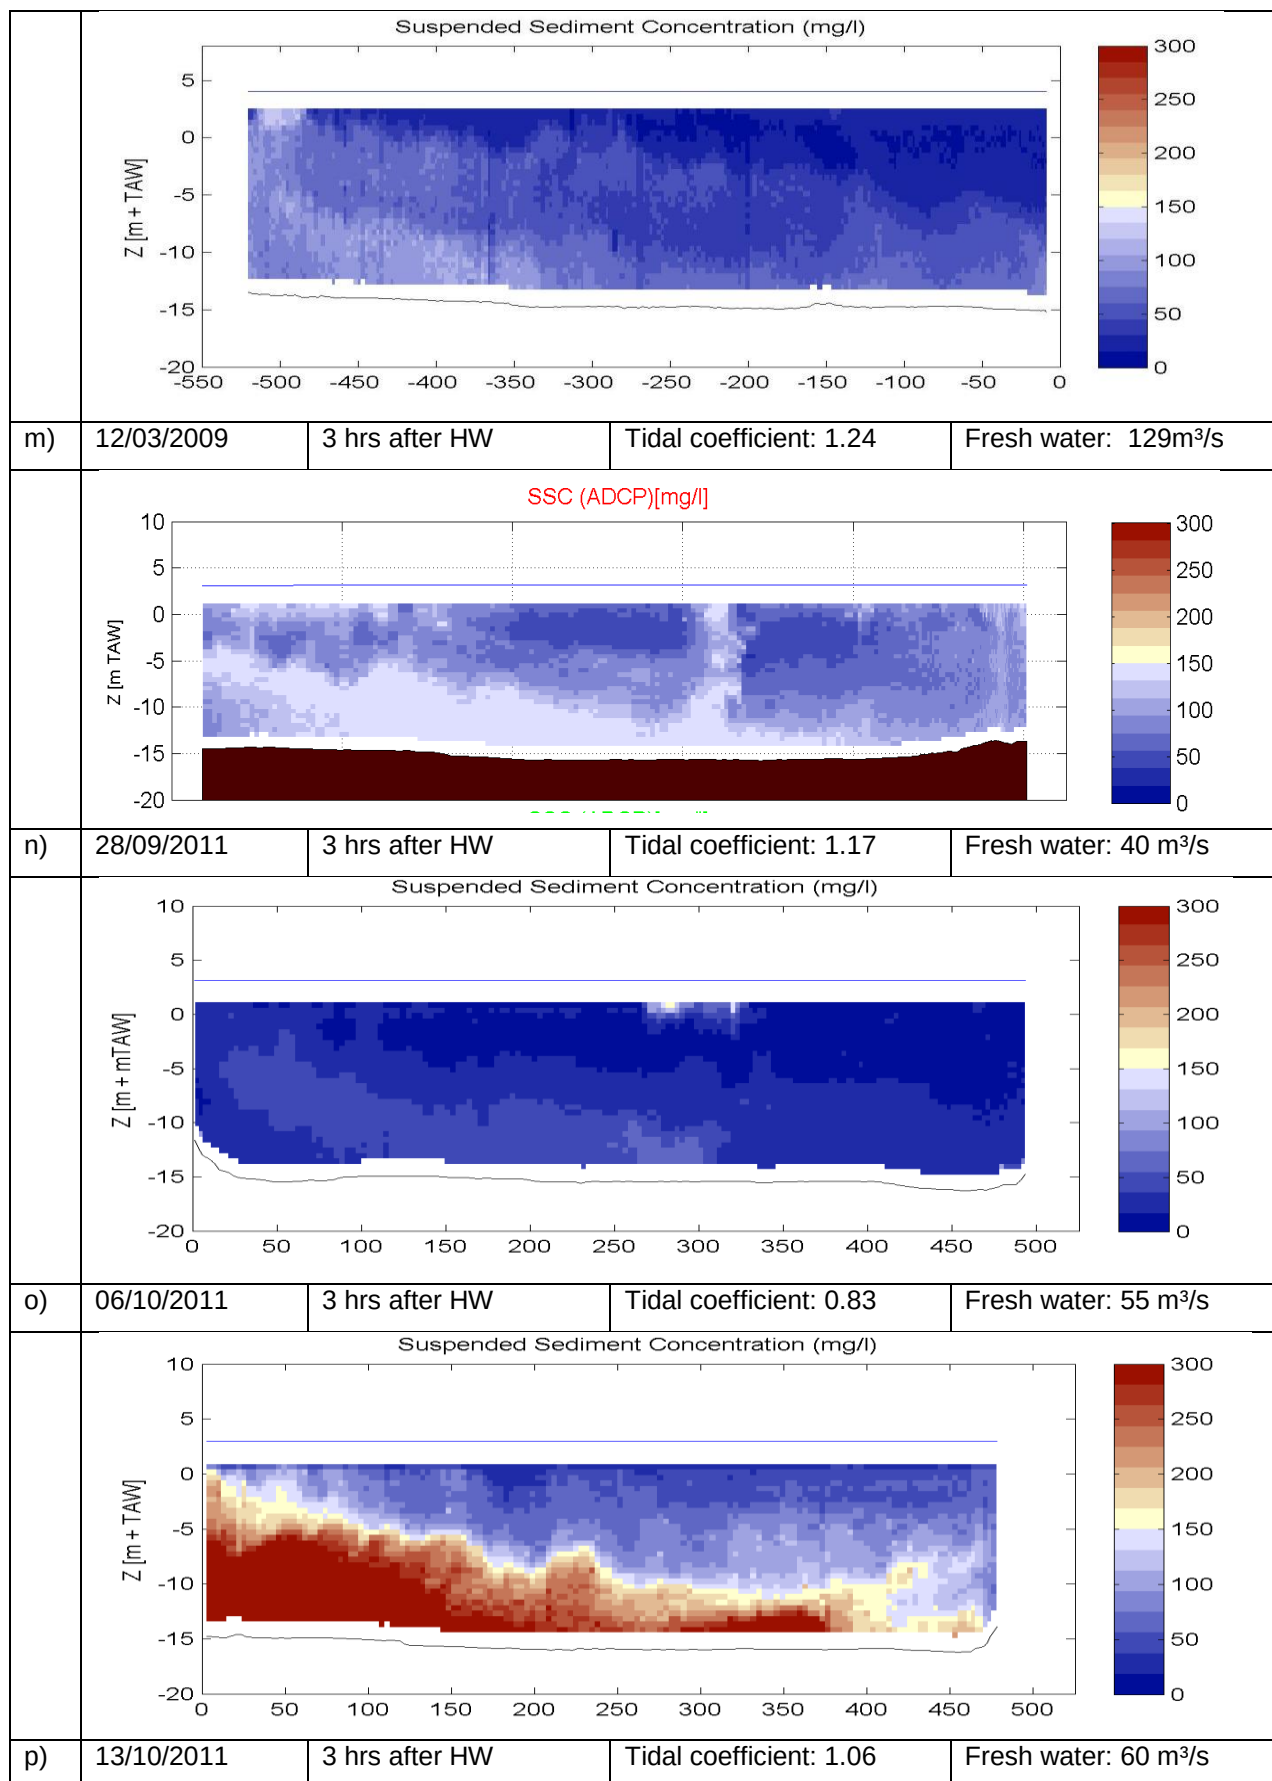

Annex J Overview of HCBS2 and aanslibbing Deurganckdok reports

Report	Description of HCBS2
Ambient Conditions Lower Sea Scheldt	
5.3	Overview of ambient conditions in the river Scheldt – January-June 2006 (I/RA/11291/06.088/MSA)
5.4	Overview of ambient conditions in the river Scheldt – July-December 2006 (I/RA/11291/06.089/MSA)
5.5	Overview of ambient conditions in the river Scheldt : RCM-9 buoy 84 & 97 (1/1/2007 -31/3/2007) (I/RA/11291/06.090/MSA)
5.6	Analysis of ambient conditions during 2006 (I/RA/11291/06.091/MSA)
Calibration	
6.1	Winter Calibration (I/RA/11291/06.092/MSA)
6.2	Summer Calibration and Final Report (I/RA/11291/06.093/MSA)
Through tide Measurements Winter 2006	
7.1	21/3 Scheldewacht – Deurganckdok – Salinity Distribution (I/RA/11291/06.094/MSA)
7.2	22/3 Parel 2 – Deurganckdok (I/RA/11291/06.095/MSA)
7.3	22/3 Laure Marie – Liefkenshoek (I/RA/11291/06.096/MSA)
7.4	23/3 Parel 2 – Schelle (I/RA/11291/06.097/MSA)
7.5	23/3 Laure Marie – Deurganckdok (I/RA/11291/06.098/MSA)
7.6	23/3 Veremans Waarde (I/RA/11291/06.099/MSA)
HCBS Near bed continuous monitoring (Frames)	
8.1	Near bed continuous monitoring winter 2006 (I/RA/11291/06.100/MSA)
INSSEV	
9	Settling Velocity - INSSEV summer 2006 (I/RA/11291/06.102/MSA)
Cohesive Sediment	
10	Cohesive sediment properties summer 2006 (I/RA/11291/06.103/MSA)
Through tide Measurements Summer 2006	
11.1	Through Tide Measurement Sediview and Siltprofiler 27/9 Stream - Liefkenshoek (I/RA/11291/06.104/MSA)
11.2	Through Tide Measurement Sediview 27/9 Veremans - Raai K (I/RA/11291/06.105/MSA)
11.3	Through Tide Measurement Sediview and Siltprofiler 28/9 Stream - Raai K (I/RA/11291/06.106/MSA)
11.4	Through Tide Measurement Sediview 28/9 Veremans - Waarde(I/RA/11291/06.107/MSA)
11.5	Through Tide Measurements Sediview 28/9 Parel 2 - Schelle (I/RA/11291/06.108/MSA)
11.6	Through Tide measurement 26/9 Scheldewacht – Deurganckdok – Salinity

	Distribution (I/RA/11291/06.161/MSA)
Analysis	
12	Report concerning the presence of HCBS layers in the Scheldt river (I/RA/11291/06.109/MSA)

Report Description of Opvolging aanslibbing Deurganckdok between April 2006 till March 2008	
Sediment Balance: Bathymetry surveys, Density measurements, Maintenance and construction dredging activities	
1.1	Sediment Balance: Three monthly report 1/4/2006 – 30/06/2006 (I/RA/11283/06.113/MSA)
1.2	Sediment Balance: Three monthly report 1/7/2006 – 30/09/2006 (I/RA/11283/06.114/MSA)
1.3	Sediment Balance: Three monthly report 1/10/2006 – 31/12/2006 (I/RA/11283/06.115/MSA)
1.4	Sediment Balance: Three monthly report 1/1/2007 – 31/03/2007 (I/RA/11283/06.116/MSA)
1.5	Annual Sediment Balance (I/RA/11283/06.117/MSA)
1.6	Sediment balance Bathymetry: 2005 – 3/2006 (I/RA/11283/06.118/MSA)
1.10	Sediment Balance: Three monthly report 1/4/2007 - 30/06/2007 (I/RA/11283/07.081/MSA)
1.11	Sediment Balance: Three monthly report 1/7/2007 – 30/09/2007 (I/RA/11283/07.082/MSA)
1.12	Sediment Balance: Three monthly report 1/10/2007 – 31/12/2007 (I/RA/11283/07.083/MSA)
1.13	Sediment Balance: Three monthly report 1/1/2007 – 31/03/2007 (I/RA/11283/07.084/MSA)
1.14	Annual Sediment Balance (I/RA/11283/07.085/MSA)
Factors contributing to salt and sediment distribution in Deurganckdok: Salt-Silt (OBS3A) & Frame measurements, Through tide measurements (SiltProfiling & ADCP)	
2.1	Through tide measurement Siltprofiler 21/03/2006 Laure Marie (I/RA/11283/06.087/WGO)
2.2	Through tide measurement Siltprofiler 26/09/2006 Stream (I/RA/11283/06.068/MSA)
2.3	Through tide measurement Sediview spring tide 22/03/2006 Veremans (I/RA/11283/06.110/BDC)
2.4	Through tide measurement Sediview spring tide 27/09/2006 Parel 2 (I/RA/11283/06.119/MSA)
2.5	Through tide measurement Sediview average tide 24/10/2007 Parel 2 (I/RA/11283/06.120/MSA)
2.6	Salinity-Silt distribution & Frame Measurements Deurganckdok 13/3/2006 – 31/05/2006 (I/RA/11283/06.121/MSA)
2.7	Salinity -Silt distribution & Frame Measurements Deurganckdok 15/07/2006 – 31/10/2006 (I/RA/11283/06.122/MSA)
2.8	Salinity-Silt distribution & Frame Measurements Deurganckdok 12/02/2007 – 18/04/2007 (I/RA/11283/06.123/MSA)
2.9	Calibration stationary equipment autumn (I/RA/11283/07.095/MSA)
2.10	Through tide measurement Siltprofiler 23 October 2007 (I/RA/11283/07.086/MSA)

Report Description of Opvolging aanslibbing Deurganckdok between April 2006 till March 2008	
2.11	Through tide measurement Salinity Profiling winter (I/RA/11283/07.087/MSA)
2.12	Through tide measurement Sediview winter 11 March 2008 Transect I (I/RA/11283/07.088/MSA)
2.13	Through tide measurement Sediview winter 11 March 2008 Transect K (I/RA/11283/07.089/MSA)
2.14	Through tide measurement Sediview winter 11 March 2008 Transect DGD (I/RA/11283/07.090/MSA)
2.15	Through tide measurement Siltprofiler 12 March 2008 (I/RA/11283/07.091/MSA)
2.16	Salinity-Silt distribution Deurganckdok summer (21/6/2007 – 30/07/2007) (I/RA/11283/07.092/MSA)
2.17	Salinity-Silt distribution & Frame Measurements Deurganckdok autumn (17/09/2007 - 10/12/2007) (I/RA/11283/07.093/MSA)
2.18	Salinity-Silt distribution & Frame Measurements Deurganckdok winter (18/02/2008 - 31/3/2008) (I/RA/11283/07.094/MSA)
2.19	Calibration stationary & mobile equipment winter (I/RA/11283/07.096/MSA)
Boundary Conditions: Upriver Discharge, Salt concentration Scheldt, Bathymetric evolution in access channels, dredging activities in Lower Sea Scheldt and access channels	
3.1	Boundary conditions: Three monthly report 1/1/2007 – 31/03/2007 (I/RA/11283/06.127/MSA) including HCBS 2 report 5.5
3.2	Boundary conditions: Annual report (I/RA/11283/06.128/MSA) ¹
3.10	Boundary conditions: Three monthly report 1/4/2007 – 30/06/2007 (I/RA/11283/07.097/MSA)
3.11	Boundary conditions: Three monthly report 1/7/2007 – 30/09/2007 (I/RA/11283/07.098/MSA)
3.12	Boundary conditions: Three monthly report 1/10/2007 – 31/12/2007 (I/RA/11283/07.099/MSA)
3.13	Boundary conditions: Three monthly report 1/1/2008 – 31/03/2008 (I/RA/11283/07.100/MSA)
3.14	Boundary conditions: Annual report (I/RA/11283/07.101/MSA)
Analysis	
4.1	Analysis of Siltation Processes and Factors, 4/06 – 3/07 (I/RA/11283/06.129/MSA)
4.10	Analysis of Siltation Processes and Factors, 4/07 – 3/08 (I/RA/11283/07.102/MSA)

¹ considered in report 5.6 'Analysis of ambient conditions during 2006' (I/RA/11291/06.091/MSA) in the framework of the study 'Extension of the study about density currents in the Beneden Zeeschelde'

Report Description of Opvolging aanslibbing Deurganckdok between April 2008 till March 2010	
Sediment Balance: Bathymetry surveys, Density measurements, Maintenance and construction dredging activities	
1.20	Sediment Balance: Three monthly report 1/4/2008 - 30/6/2008 (I/RA/11283/08.076/MSA)
1.21	Sediment Balance: Three monthly report 1/7/2008 – 30/9/2008 (I/RA/11283/08.077/MSA)
1.22	Sediment Balance: Three monthly report 1/10/2008 – 31/12/2008 (I/RA/11283/08.078/MSA)
1.23	Sediment Balance: Three monthly report 1/1/2009 – 31/03/2009 (I/RA/11283/08.079/MSA)
1.24	Annual Sediment Balance (I/RA/11283/08.080/MSA)
Factors contributing to salt and sediment distribution in Deurganckdok: Salt-Silt (OBS3A) & Frame measurements, Through tide measurements (SiltProfiling & ADCP) & Calibrations	
2.20	Through tide measurement Sediview DGD during average tide Spring 2008 – 19 June 2008 (I/RA/11283/08.081/MSA)
2.21	Through tide measurement Sediview DGD during average tide Spring 2008 – 26 June 2008 (I/RA/11283/08.082/MSA)
2.22	Through tide measurement Sediview DGD during neap tide Summer 2008 – 24 September 2008 (I/RA/11283/08.083/MSA)
2.23	Through tide measurement Sediview DGD during spring tide Summer 2008 – 30 September 2008 (I/RA/11283/08.084/MSA)
2.24	Through tide measurement Sediview DGD during neap tide Autumn 2008 – 02 December 2008 (I/RA/11283/08.085/MSA)
2.25	Through tide measurement Sediview DGD during spring tide Autumn 2008 – 10 December 2008 (I/RA/11283/08.086/MSA)
2.26	Through tide measurement Sediview DGD during neap tide Winter 2009 – 06 March 2009 (I/RA/11283/08.087/MSA)
2.27	Through tide measurement Sediview DGD during spring tide Winter 2009 – 12 March 2009 (I/RA/11283/08.088/MSA)
2.28	Through tide measurement ADCP eddy DGD Summer 2008 – 1 October 2008 (I/RA/11283/08.089/MSA)
2.29	Through tide measurement Siltprofiler DGD Summer 2008 – 29 September 2008 (I/RA/11283/08.090/MSA)
2.30	Through tide measurement Siltprofiler DGD Winter 2009 – 13 March 2009 (I/RA/11283/08.091/MSA)
2.31	Through tide measurement Salinity Profiling DGD Winter 2009 – 11 March 2009 (I/RA/11283/08.092/MSA)
2.32	Salt-Silt distribution Deurganckdok: Six monthly report 1/4/2008 - 30/9/2008 (I/RA/11283/08.093/MSA)
2.33	Salt-Silt distribution Deurganckdok: Six monthly report 1/10/2008 – 31/3/2009 (I/RA/11283/08.094/MSA)
2.34	Calibration stationary & mobile equipment Autumn 2008 – 27 & 28 October 2008 (I/RA/11283/08.095/MSA)

Report Description of Opvolging aanslibbing Deurganckdok between April 2008 till March 2010	
Boundary Conditions: Upriver Discharge, Salt concentration Scheldt, Bathymetric evolution in access channels, dredging activities in Lower Sea Scheldt and access channels	
3.20	Boundary conditions: Six monthly report 1/4/2008 – 30/09/2008 (I/RA/11283/08.097/MSA)
3.21	Boundary conditions: Six monthly report 1/10/2008 – 31/03/2009 (I/RA/11283/08.097/MSA)
Analysis	
4.20	Analysis of Siltation Processes and Factors (I/RA/11283/08.098/MSA)